
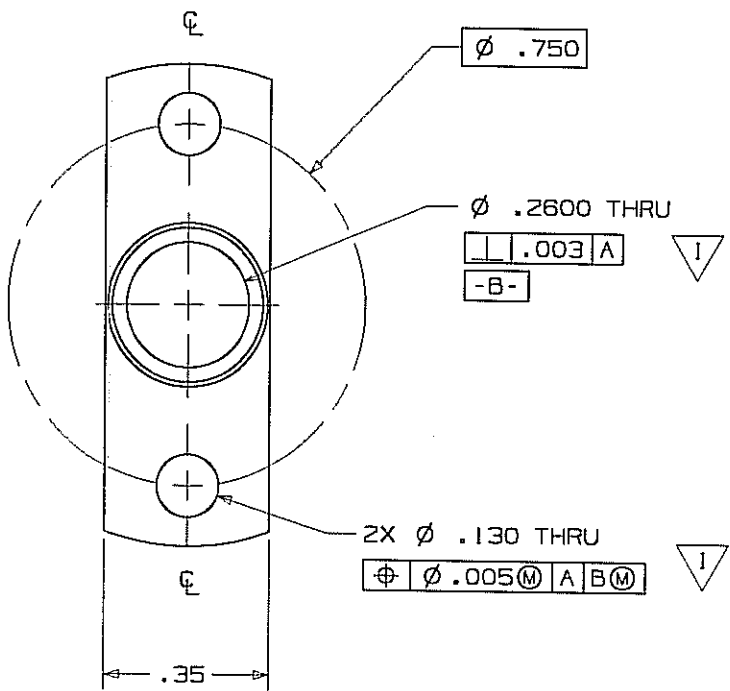
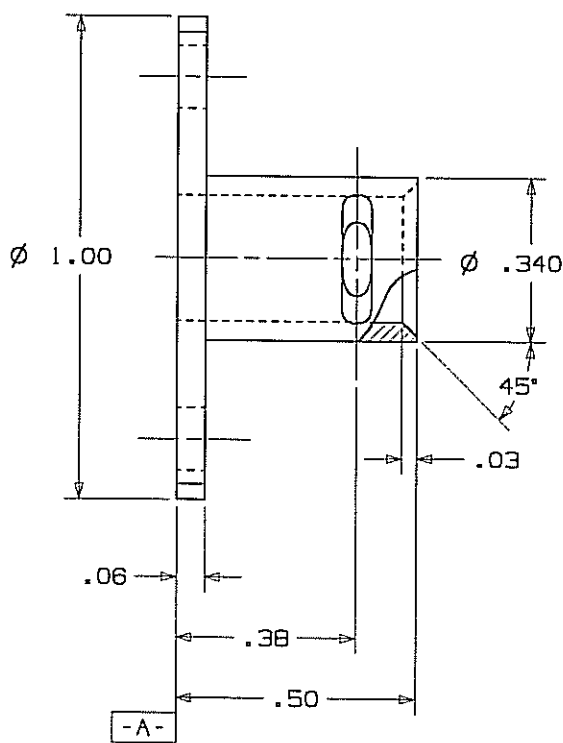


NOTES:

1. BREAK ALL SHARP EDGES & CORNERS R.005-.015 (OR X 45°).
2. ▽ INDICATES KEY FEATURES TO BE VERIFIED AT INCOMING INSPECTION.
3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	ORIGINAL RELEASE	MG	03/03/08	BCT016508
B	REVISED NOTE 3	EK	8/27/11	BCT031229

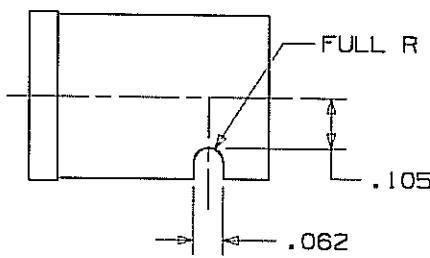

4-24-12 408

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CARLIDIAN BCT, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CARLIDIAN BCT, INC.				10811 Collina Avenue Lakewood, Colorado 80215-4440 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1992 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.				DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED	
.X± 0.10 .XX± 0.01 .XXX± 0.005 .XXXX± 0.0020				MATERIAL 6061-T6 ALUMINUM	
ANGLES ± 2°				ORIGINATOR	
SURF. FINISH 63				DATE	
SIZE C	SCALE 4/1	DO NOT SCALE DWG	THIRD ANGLE PROJECTION	DRAWN S DURKEE	DATE 08/18/03
PART NO. 777094-007				REV B	SHEET 1 OF 1