

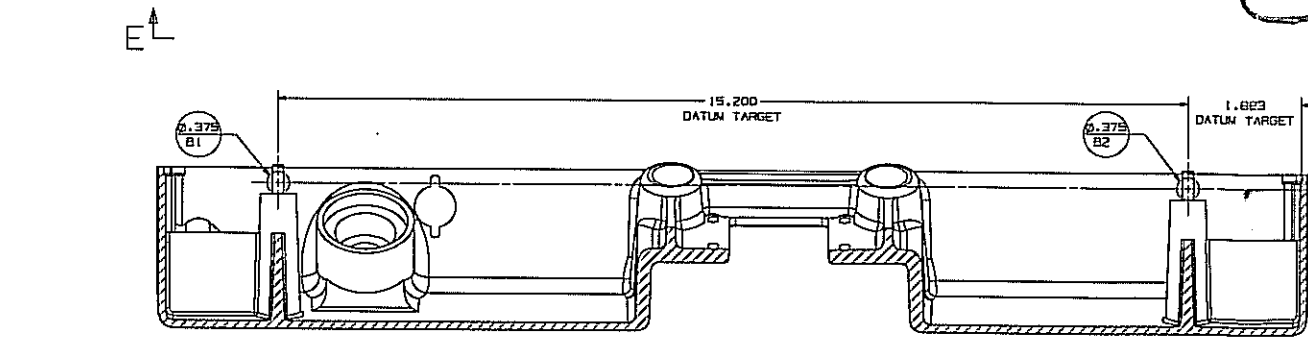
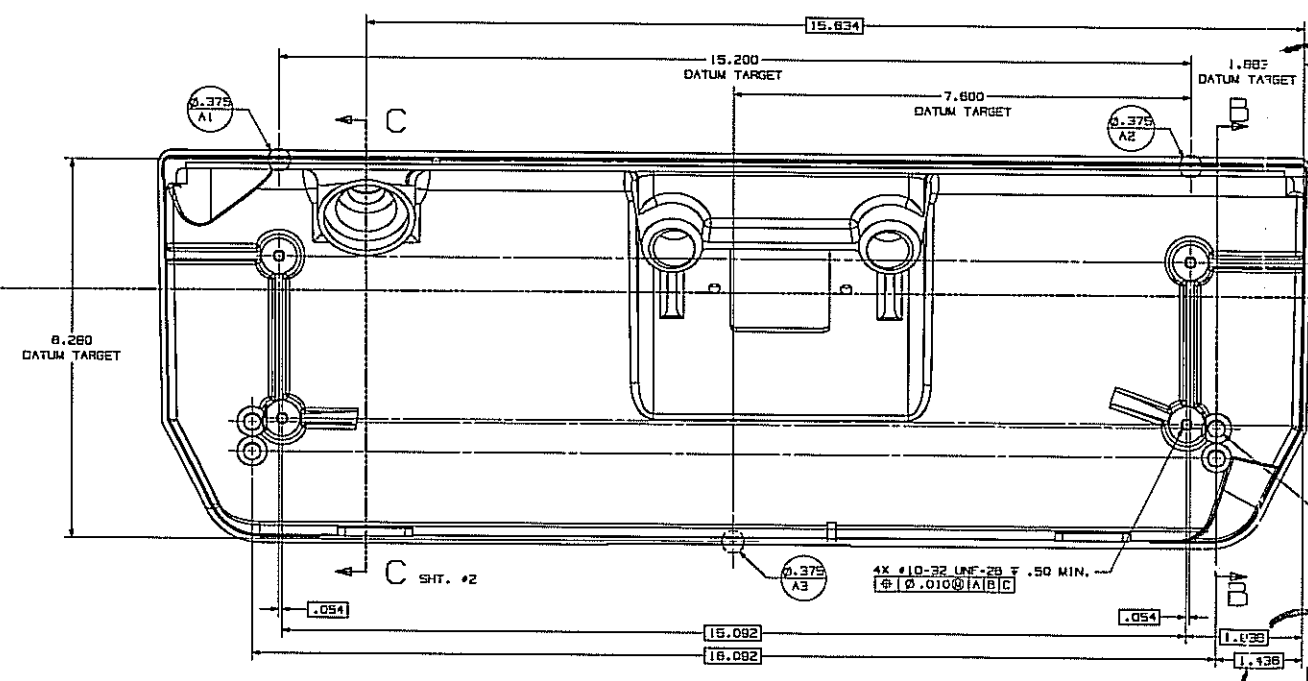
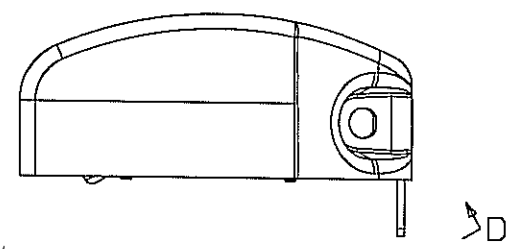
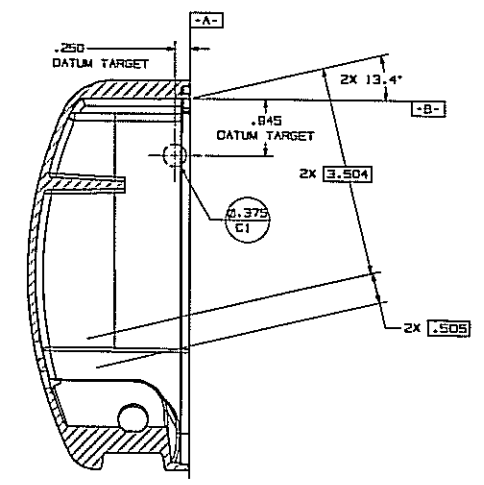


- NOTES: (UNLESS OTHERWISE SPECIFIED)
- 1. DIMENSIONS NOT SPECIFIED ON THE DRAWING ARE CONTAINED IN THE DATABASE FOR THIS PART NUMBER AND REVISION.
 - 2. SURFACE FINISH TO BE 125 OR BETTER.
 - 3. ∇ INDICATES KEY DIMENSIONS TO BE CHECKED AT INCOMING Q.C.
 - 4. SECURE AND SET SCREW 801 USING LOCTITE 802.
 - 5. INTERIOR SURFACES TO BE FREE OF DELIBERATELY APPLIED PRIMER AND PAINT. OVERSPRAY OF PRIMER AND PAINT IS ACCEPTABLE ON INTERIOR SURFACES.
 - 6. NO PRIMER OR PAINT ALLOWED ON ALL INDICATED SURFACES, THREADS OR SCREW THREADS. NO OVERSPRAY ALLOWED.
 - 7. PAINT PER SPEC 777098-070, being LIGHT GRAY.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE, REPLACES #777098-808	KMK	11/14/07	001
B	ADDED 2X $\phi .44$, .XXX $\phi .010$ BLOCK TOL. WAS .XXX $\pm .005$, 1.2051 WAS .205, .928 WAS .939	KMK	01/07/08	002
C	PICTORIAL REVISION TO INCORPORATE DOUBLE D HOLE FROM CASTING CHANGE	TLM	01/07/08	003

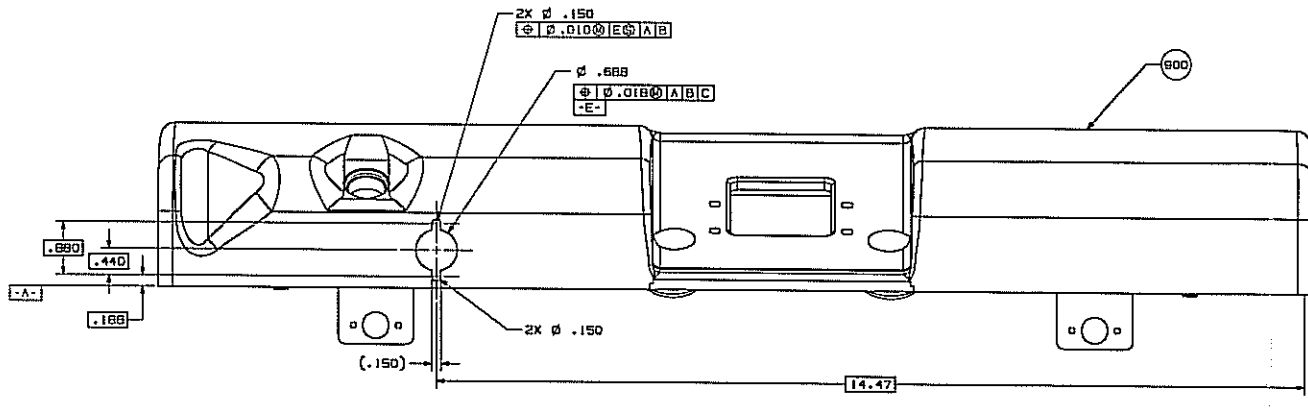

Dated Print 7/24/09

Q03	I	EA	778500-208	STUD, SELF CLINCHING, SST
802	AR	EA	778128-000	LOCTITE 271, (RED)
801	A	EA	778015-010	#10-32 SCR, SET, CLP, STL 1.00 LG.
800	I	EA	777098-941	CASTING, TOP CAP
ITEM	QTY	UOM	PART NO.	DESCRIPTION
BILL OF REFERENCE				
MACHINING, TOP CAP				
777098-942				

408

