


## NOTES:

- 1. BREAK ALL EDGES AND CORNERS R.005-015 OR x 45°
- 2. T INDICATES KEY DIMENSION TO BE CHECKED AT INCOMING O.C.
- 3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.

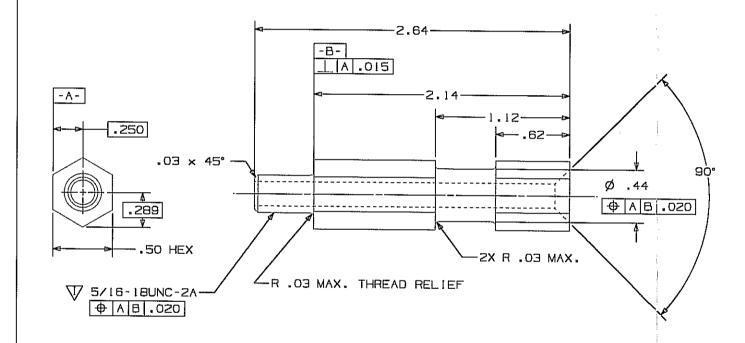

REV	REVISION DESCRIPTION	BY	DATE	ECO #
Α	INITIAL RELEASE	кмк	5/2/87	BCT 002140
В	ADDED Ø.44 RELIEF	кмк	1/7/98	
С	ADDED GEOMETRIC TOLERANCES	KMK	11/30/98	
D	.62 DIM WAS .71, 2.64 WAS 2.72, 2.14 was 2.22	MY	04/20/07	BCT 019438
E	Added equiv. alternate mat'l, Chgd Note 3	MY	10/18/08	BCT026303
F	REVISED NOTE 3	EK	B/09/11	BCT031039





7-18-11

408

NACI SHALL HET SALE OF APPAR	THE REPRESENT OF THE PERSON OF	HE THE PROPERTY OF Carldianset () PIEU, ON ISAND FOR WALFACTURE ON N PERMISSION OF Carldianset INC.		10811 Calline Avenue Lakevood, Calonado 80215-444
PER ANSI	AND SYMBOLINGY 114.5M-1982 SPECIFIED ARE	DIMENSIONS ARE IN INCHES UNLI OTHERWISE SPECIFIED		USA
.Xx 0.1 .XX 0.01 .XXX 0.005	wales  +   °  suppose Finish  125 RMS	MATERIAL 2024-T4 or 2024-T351 ALUMINUM HEX STOCK	HEX EXTE	•
SIZE SCALE	125 RMS	DRIBINATOR  K. KLIMEK  321/  DRAWN  DATE  361/ 361/		PQ4. F 1 / 1

UNIGRAPHICS