NOTES

I. INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.


2. FINISH: NICOTEF PLATING BY NIMET INDUSTRY, NIZODO, 0.0127 mm THICK.


♦ Ø0.05₩ ∧ BW

SECTION A-A

A INSPECTION FOR PERPENDICULARITY NOT NEEDED.

REV	REVISION DESCRIPTION	5Y	DATE	ECO #
Α	INITIAL RELEASE	ALE.	THE COL	BCT016724
В	ADD 0.10 RADIUS TO 2.872 DIA INSIDE CORNER REMOVE GDAT ON CROSS HOLE.	LNVD	1142/08	BCT018335
С	NOW ON D SIZE CHANGE INSPECTION METHOD 1.57 DIA HOLE	CNNO	13/13/17	BCT019863
D	CORRECTED TYPO. 5.800 TOLERANCE WAS +.030/+.050 . CHANGED TO +.030/050	BSE	07½1 ₀₉	BCT022960

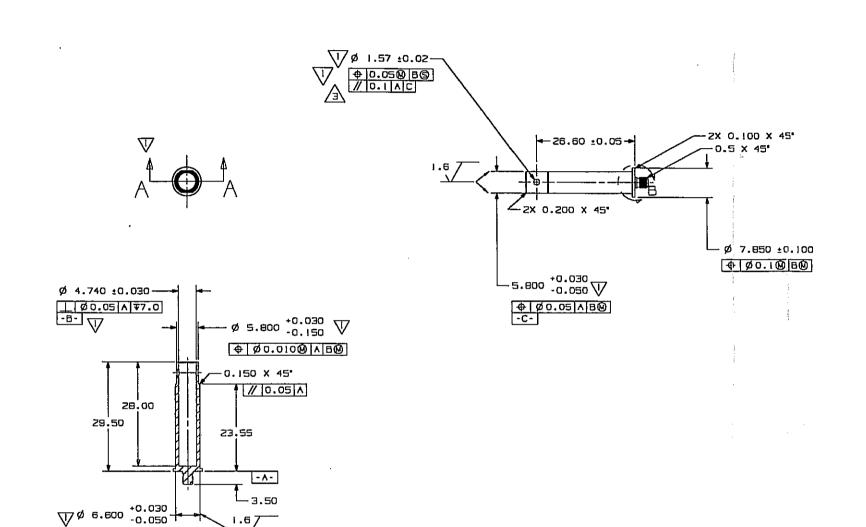

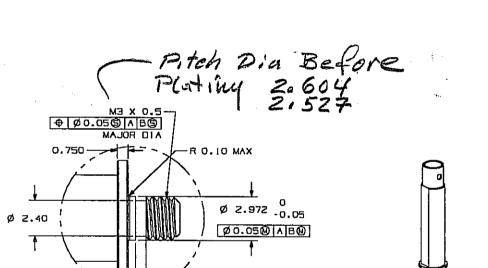

9-9-08 408

									CaridianBCT ISL Column Williams Williams						
1 '	0.04 1.008 1.004	100 E. H. S H. ST	1.0 2.0.2 4.0.10 40.050	ž QLSV.	Z Z ZIHISH NA	EOE AIRINESS LATE			SHAFT, SPRING RF VALVE						
I GRAPHI	CS	Ö	NONE	8558		DPAIR	UANJ	DE/OD/O7	" 9		280	Ď	1 "/ 1		