REV.	REVISION DESCRIPTION	BY	DATE	ENG APPR.	ECO
A	ORIGINAL RELEASE (REPLACES 777066-299) 1.510 Ø HOLE WAS 1.500 ±.002/.000; ◎ TOLERANCE WAS .002	SC	6/1/89		43757
B	ADDED NOTE 3 AND DIAMOND	VLF	12/20/91	65164	

NOTES:

34 1. BREAK ALL SHARP EDGES (.01 x 45° OR .01 R. MAX.)
2. IRRIDITE (YELLOW) PER MIL-C-5541.
3. ◆ INDICATES KEY DIMENSIONS TO BE INSPECTED BY INCOMING QC.

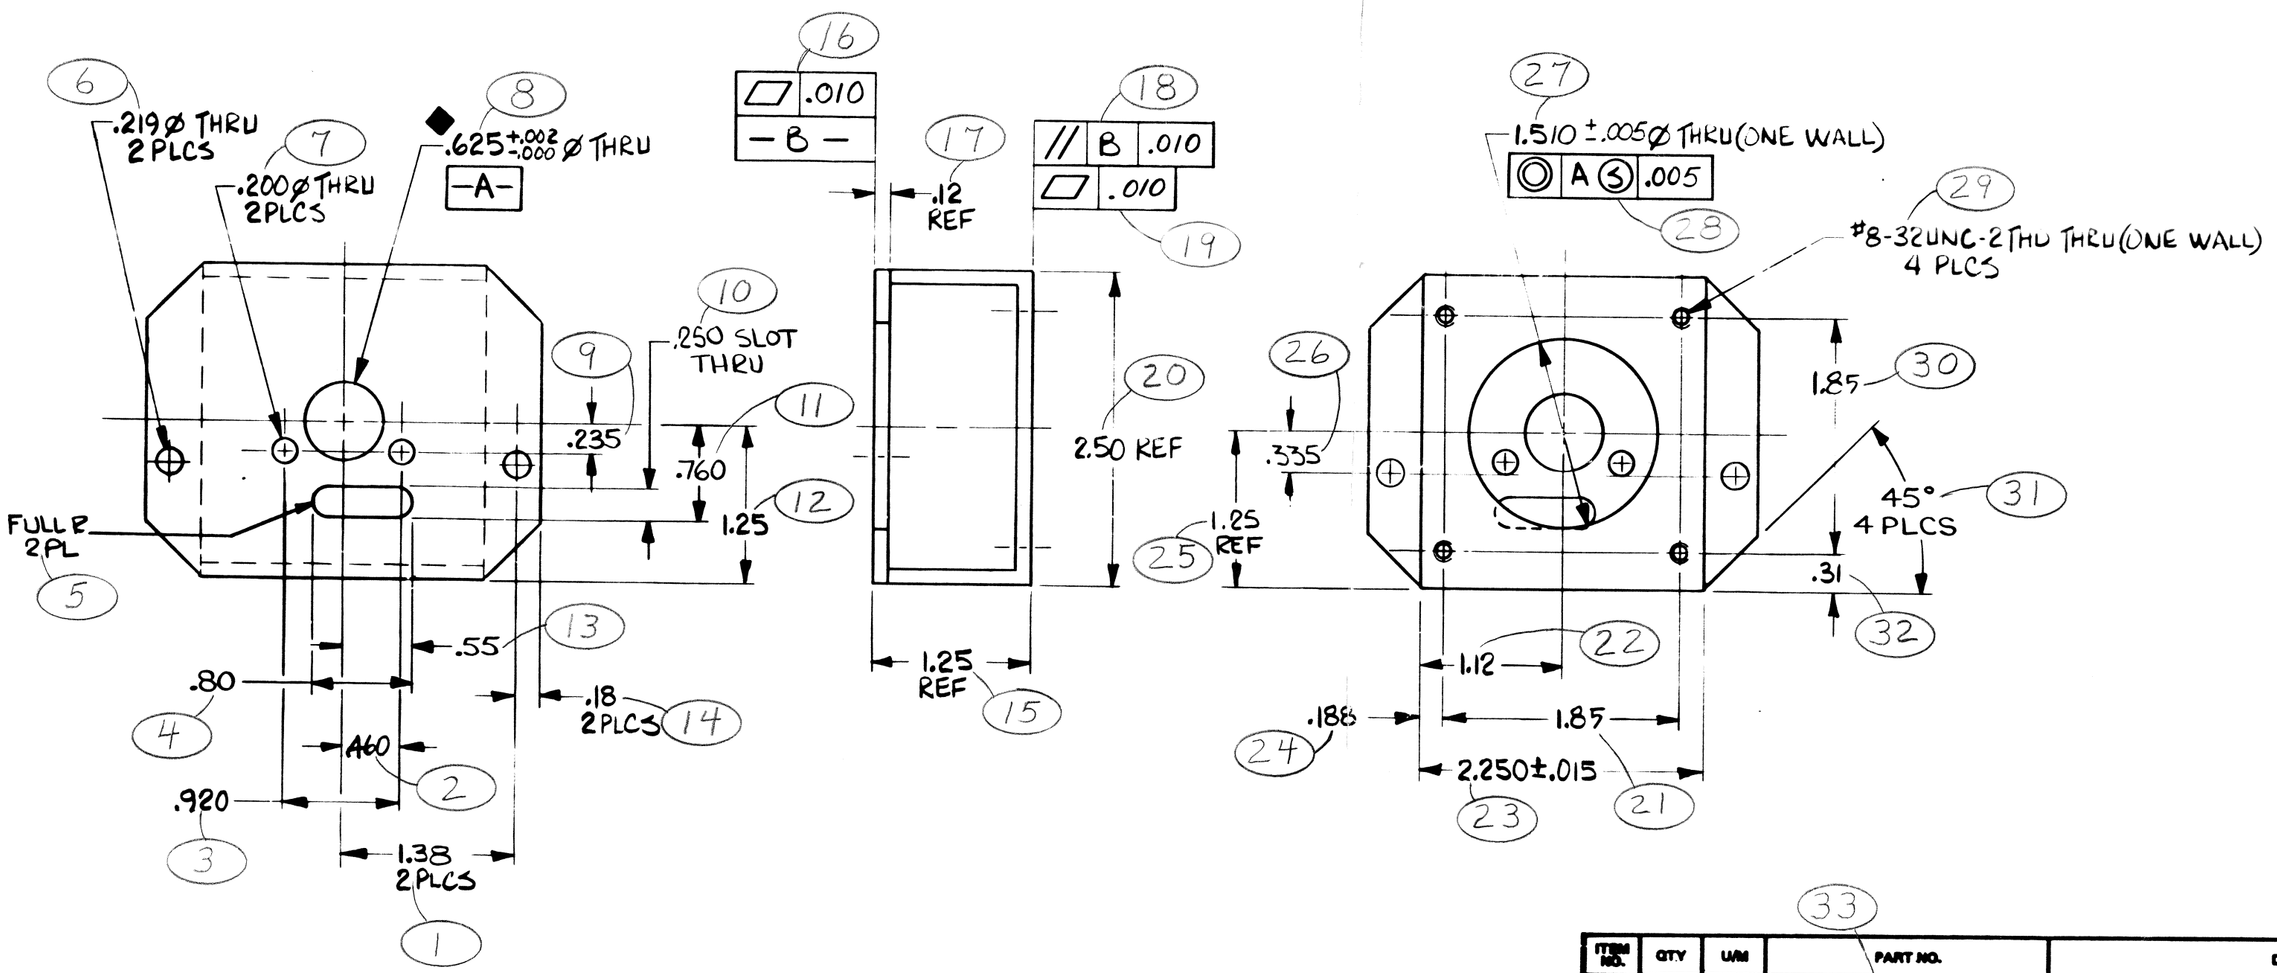

33

ITEM NO.	QTY	U/M	PART NO.	DESCRIPTION

CERTIFIED FOR PRODUCTION

EXPLANATION OF DIMENSIONS TOLERANCES AND SYMBOLIZATION PER ANSI Y14.5 1973. DIMENSIONS SPECIFIED ARE AFTER MACH. FINISH

.X ± .010
.XX ± .005
.XXX ± ~
ANGLES ± 3°
SURF. FINISH 125 RMS

MATERIAL
EXTRUSION, ALUM ALLOY
1.25 x 2.50 x 3.2 LNG

SIZE C | SCALE FULL | DO NOT SCALE DWG. | THIRD ANGLE PROJECTION

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF COBE LABORATORIES, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN BY [illegible] 11/24/84
CHECKED BY
PROD ENGR
R & D Smith 8/13/86
QUALITY CONTROL

COBE
COBE LABORATORIES, INC.
LAKEWOOD, COLORADO, U.S.A.

TITLE **BRACKET, VALVE**

COMM CLASS

CHGD BY	DATE	ECO NO.	INTENT

LATEST CHANGE

PART STATUS A

PART NO. **777067-170** REV **B** SHT 1 OF 1

DATED PRINT
1-3-95

408