
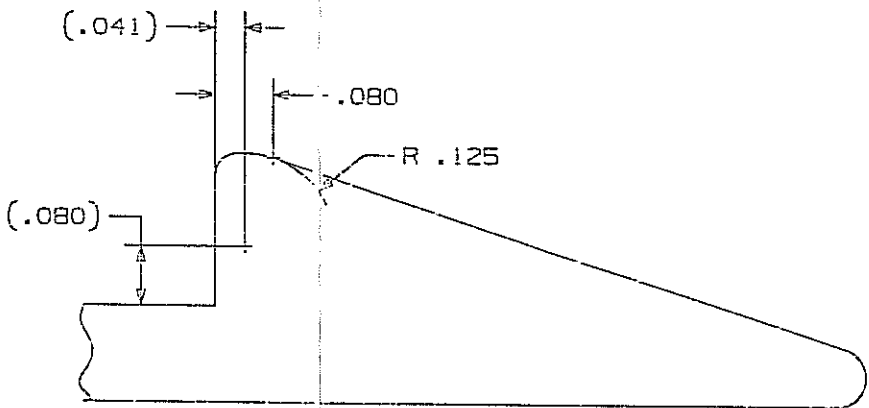
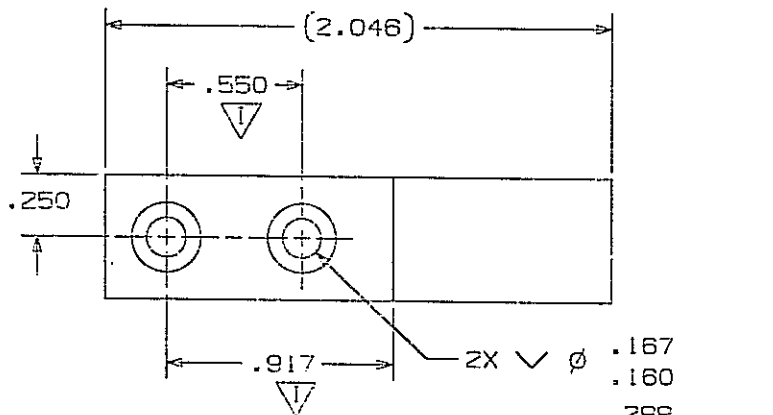




NOTES:

- 1. PASSIVATE PER QQ-P-35, EXCEPT WAIVE SALT SPRAY TEST.
- 2. ▽ INDICATES KEY DIMENSION TO BE CHECKED AT INCOMING O.C.
- 3. DEBURR SHARP EDGES AND CORNERS R .005-015 (OR 45°).

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	ELH	8/28/97	BCT 002427

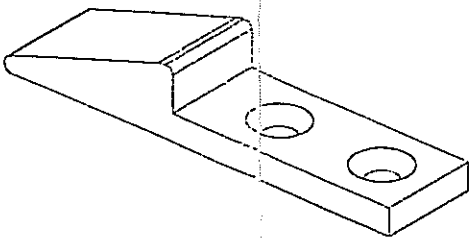

DETAIL B
SCALE 6:1

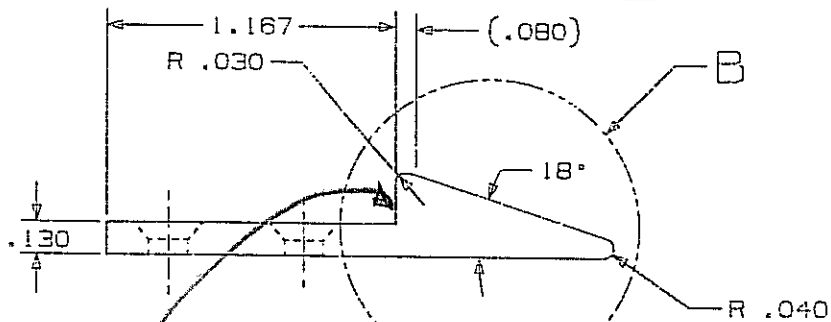

No step allowed.

Supplier must notify CODE BCT, Inc. in writing whenever any significant change to this part is required. Significant change shall include, but not be limited to, changes in material, additives, processes, dimensions, tolerances, assembly and testing changes that affect form, fit, function, interchangeability, appearance, safety or application of the part on the product for which it is intended. Such change will require prior written approval by CODE BCT, Inc.

TOLERANCES AND SYMBOLOGY PER ANSI Y14.5M-1993 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		CODE BCT, Inc. Bless Component Technology 1301 Oak Street Lakewood, Colorado 80215-4407 USA a gossbra company	
.X1 0.1 .X2 0.01 .XX 0.005 .XXX 0.0020		ANGLES ± 2° SURF. FINISH 125 RMS		MATERIAL 300 SERIES STAINLESS STEEL	
ORIGINATOR H. NGUYEN		DATE 5/5/97		TITLE HOOK, LATCH	
DRAWN EL. HORNHAUER		DATE 5/5/97		PART NO. 777096-265	
SIZE C		SCALE 2:1		REV A	
UG DWG				SHT 1	
				OF 1	

10-20-05

408