

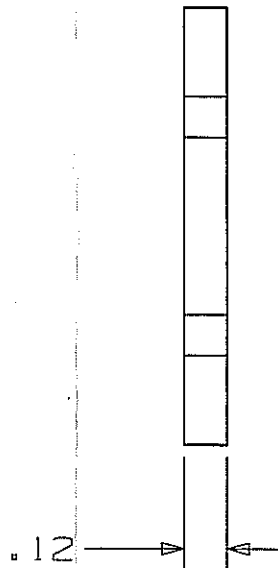


NOTES


- 1. BREAK ALL SHARP EDGES AND CORNERS.
- 2. PASSIVATE PER QQ-P-35.
- 3.  INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.

Bore .9593-.9552 ϕ

 M25X0.5 THRU

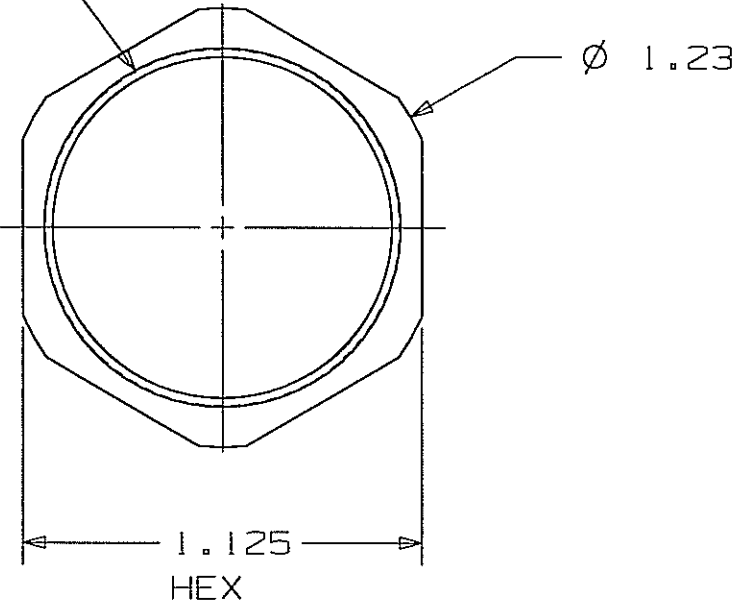

11-21-06 408

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF GAMBRO BCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF GAMBRO BCT INC.				 10811 Collins Avenue, Lakewood, Colorado 80215-4440 USA GAMBRO. BCT	
TOLERANCES AND SYMBOLOGY PER ANSI Y14.5M-1982 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE	
.X± 0.04 .XX± 0.010 .XXX± 0.005 .XXXX± 0.0020		MATERIAL 303 SST		NUT, JAM, LENS	
ANGLES ± 1		SURF. FINISH 125		ORIGINATOR DATE	
SIZE B	SCALE 2:1	DO NOT SCALE DWG	THIRD ANGLE PROJECTION	DRAWN S DURKEE	DATE 01/11/06
PART NO. 777094-232				REV A	SHT / OF 1 / 1

UNIGRAPHICS