
NOTES


1. BREAK ALL SHARP EDGES AND CORNERS.


Z. INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.


3.F;NiSH: ELECTROLESS NICKEL PLATING, MiL-C-26074E, GRADE B .0127MM THICK.

```s	k
MZ.5 X 0.45 THREADS	[.315]
MASK	
20.00	AXR 3.00 [.118]
	Δ
	/\



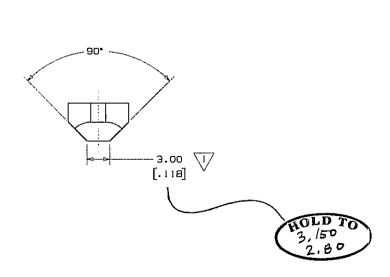

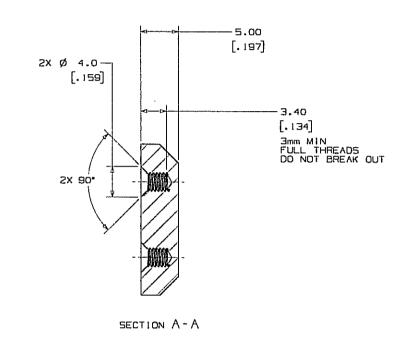



REVISION DESCRIPTION

A INITIAL RELEASE

BY DATE

DANJ 12/20/07 BCT021332

ECO .



1-16-08 408

		HERE DAVISHES AND SPECIFICATIONS ARE THE PROPERTY OF SAMEND OF INC. AND SHALL NOT BE REPRESENTED. COPIED, IN USED FOR MASSFACTURE OR SHALL OF SPRINGER STREET, SHIELDS PERMITSHOOF DE BANGES BOT 1900.							10811 Saliting Rearray, Emperator, Columnia 20215-4400 USA			
		TO ERROCIS AND STREAM THE AND 114 SEC 1900.  SHEADING STEETING AND ATHER ADDITION FINISH.  DIRECTIONS AND IN MILLIARTERS USEES DIRECTION OF THE MILLIARTERS USEES DIRECTION OF THE MILLIARTERS USEES DIRECTION OF THE MILLIARTERS USEES DIRECTION.					FINISH FINISH CRITISE SPEE	iries.	GAMBRO, BCT			
	TOLERWICES		LINETER	W	OLES.	MATERIA	AL.		TITLE			
	.ו 0.04	1	1.0	D SUPER, FINISH		8	RASS	360	ANVIL-UPPER-VALVE			
	.xx.0.008	×.,	0.2						-NEXT_ORBISAC-			
	.xxx+0.004	N. X3	. 0.10									
	.****0.0020	X, XX	••0.050						VALVE			
UNIG	RAPHICS	D	NONE	DO HGT SEALE CPO	<del>0</del> <del>0</del>	Ditam:	LNAD	DATE DE/1EI/07		ľ		