



NOTES:


- 1. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES R.02 (OR X 45°)
- 2. ▽ INDICATES KEY DIMENSIONS TO BE CHECKED AT INCOMING O.C.
- 3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATION OF COMPLIANCE TO BE PROVIDED.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE; REPLACES 777096-649	MG	02/17/05	BCT 014683
B	NOTE 3 WAS ANODIZE	MG	05/31/05	BCT 015181
C	REVISE NOTE 3	MY	04/28/08	BCT025136
D	REVISED NOTE 3	EK	08/08/11	BCT031039

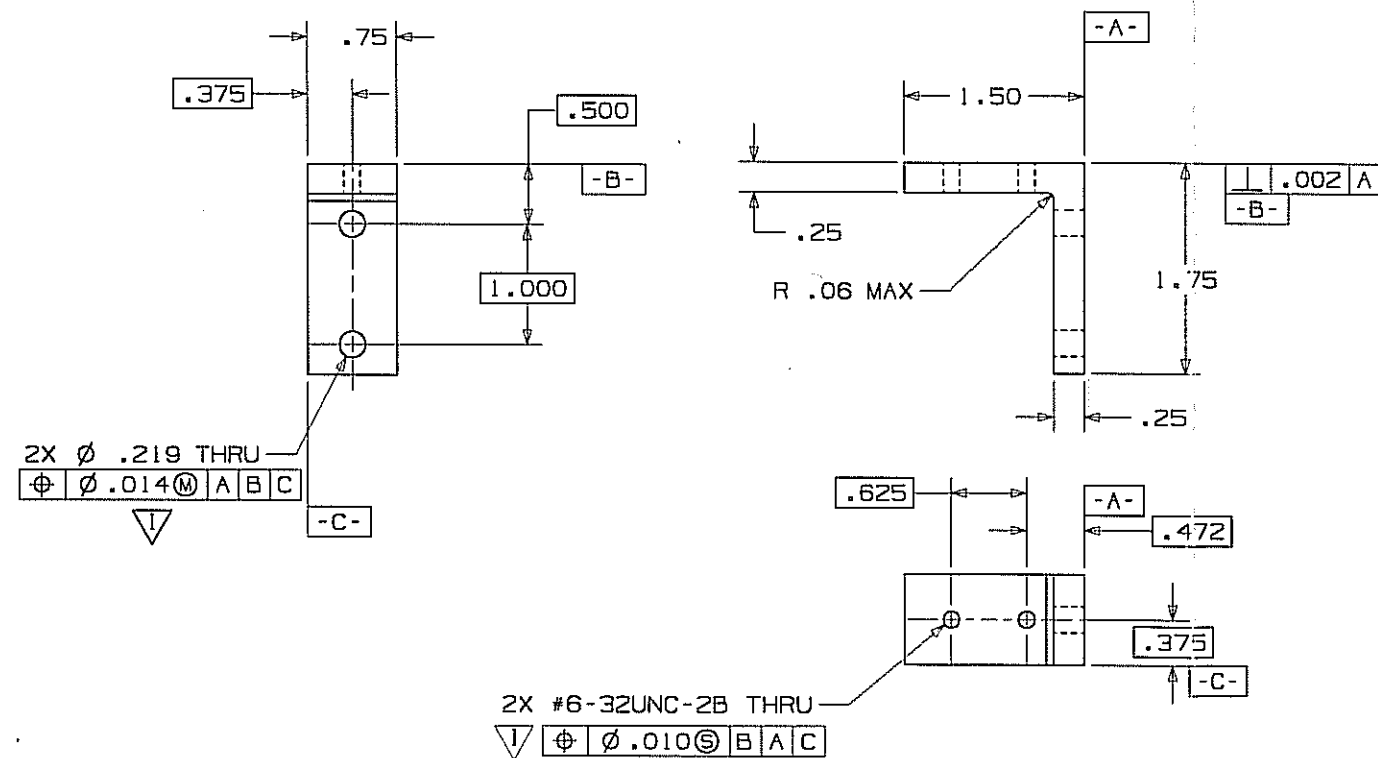

6-28-11 408

UG DWG

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT INC.					 <div>10611 Collina Avenue Lakewood, Colorado 80215-4440 USA</div>			
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.			DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE			
.X± 0.1			6061-T6 ALUMINUM		BRACKET , LOAD CELL			
.XX± 0.01								
.XXX± 0.005			ORIGINATOR				DATE	
.XXXX± 0.0020			M. GLOVER				02/18/05	
SURF. FINISH			DRAWN		PART NO.			
63 RMS			C HAKE		777098-418			
DATE			DATE		REV			
02/18/05			8/18/97		D			
SIZE			SCALE		SHT / OF			
C 1			1		1 / 1			