

NOTES:


1. BREAK ALL SHARP EDGES AND CORNERS.

2. GENERAL SPECIFICATIONS FOR ANODIZED PART:




- A. COLOR: CLEAR, TYPE III, PER MIL-A-8625F, 0.002 THK.
B. PURPOSE OF COATING: WEAR RESISTANCE.
C. NO ANODIZE ON NOTE 4 SURFACES

3. ∇ INDICATES FEATURE/DIMENSION TO BE VERIFIED BY INCOMING O.C.

4. \triangle CHROMATE CONVERSION COAT PER MIL-DTL-5541F, TYPE I (ROHS COMPLIANT NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE REQUIRED.

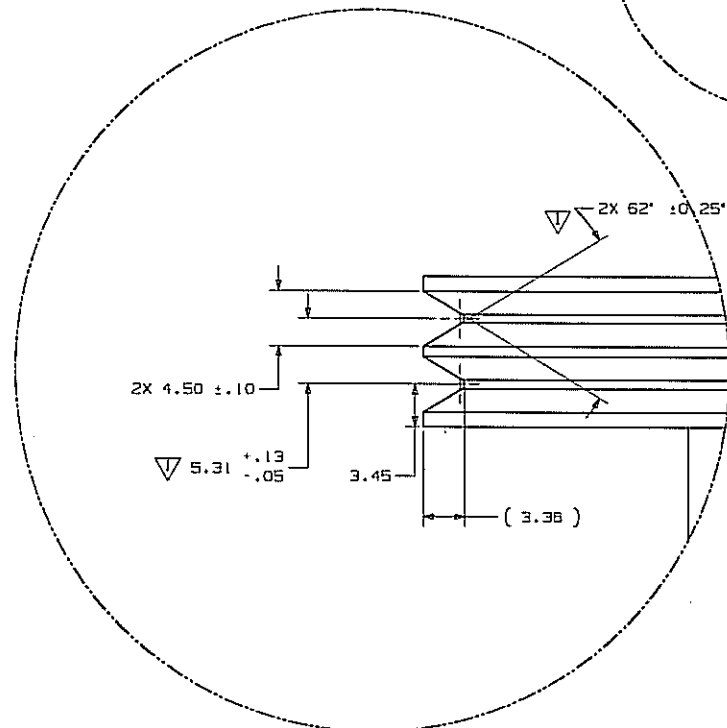

DETAIL B
SCALE: 1

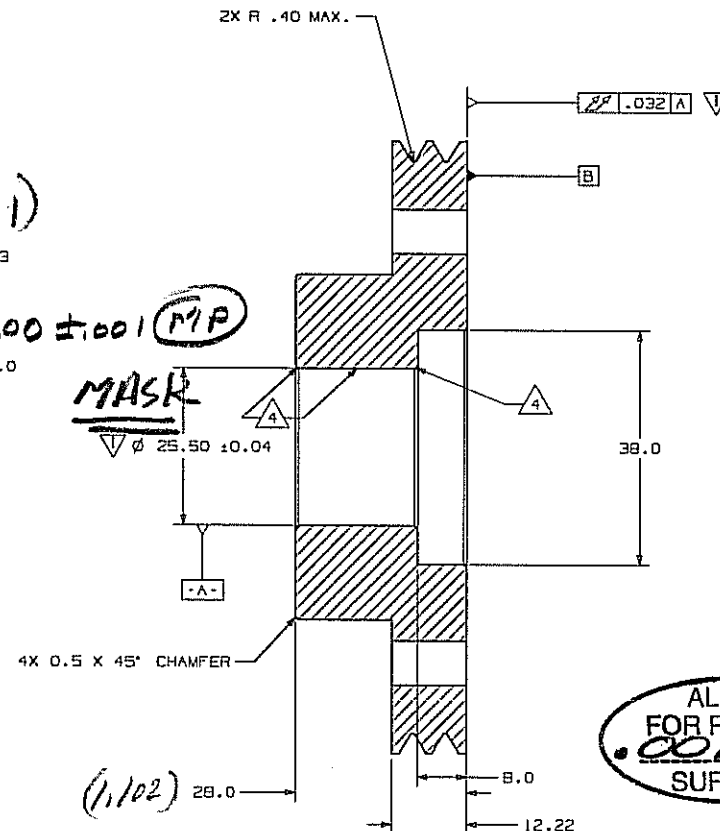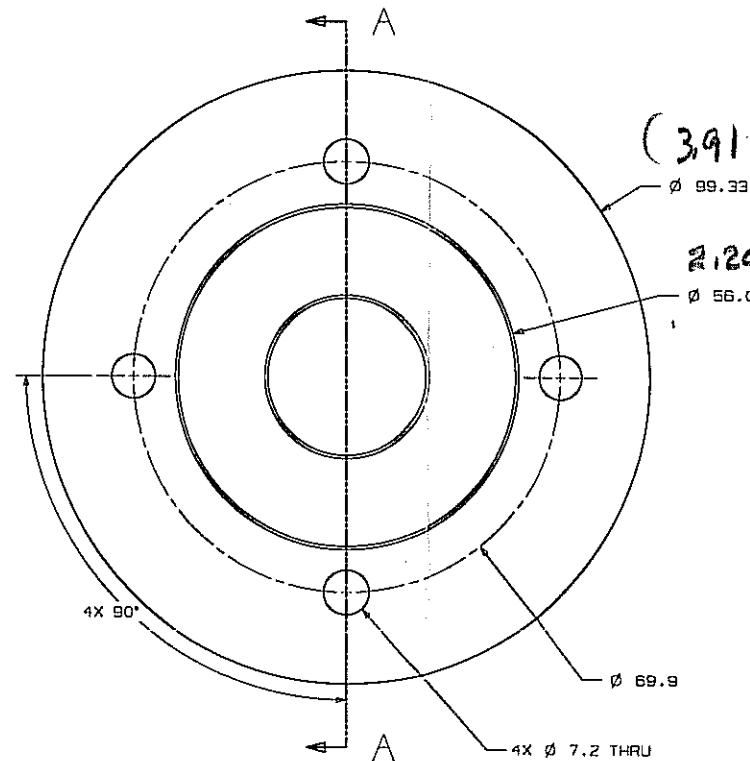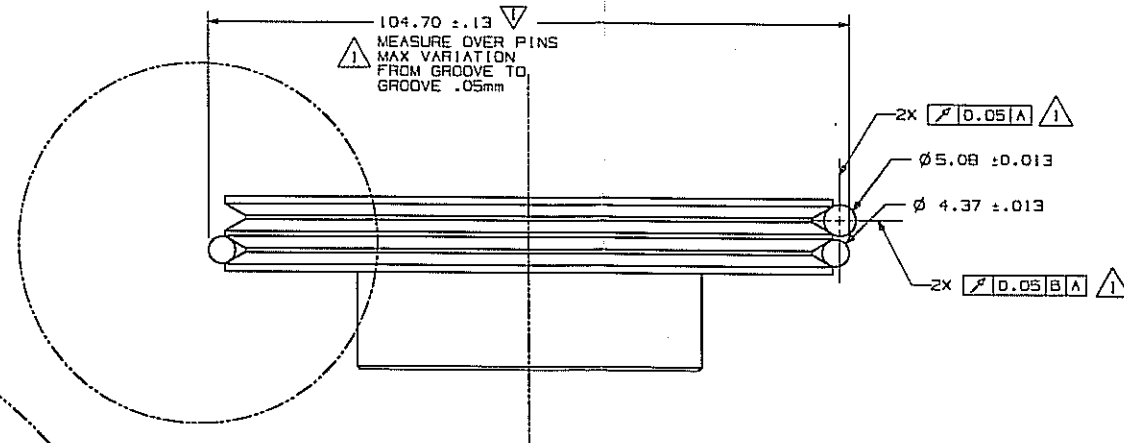

SECTION A-A

ALLOW
FOR PLATING
.001 PER
SURFACE

<p>THESE SPECIFICATIONS ARE THE PROPERTY OF CARDIAN BCT, INC. AND ARE TO BE USED ONLY FOR THE MANUFACTURE OF CARDIAN BCT, INC. PRODUCTS. NO PART OF THIS SPECIFICATION IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM CARDIAN BCT, INC.</p>				<p>CardianBCT 10011 Collins Avenue Lakewood, Colorado 80026-1100 USA</p>	
<p>INCH TOLERANCES</p>	<p>MILLIMETER TOLERANCES</p>	<p>ANGLES</p>	<p>MATERIAL</p>	<p>TITLE</p>	
<p>.001 .002 .003 .004 .005</p>	<p>.025 .050 .075 .100 .125</p>	<p>± 2 ± 1 ± 1 ± 1 ± 1</p>	<p>7075-T651 ALUMINUM</p>	<p>PULLEY, MOTOR, REVEOS</p>	
<p>SIZE SCALE</p>	<p>DATE BY</p>	<p>DATE BY</p>	<p>DATE BY</p>	<p>DATE BY</p>	<p>DATE BY</p>
<p>D2:1</p>	<p>ELLINGBOE</p>	<p>ELLINGBOE</p>	<p>ELLINGBOE</p>	<p>ELLINGBOE</p>	<p>ELLINGBOE</p>
<p>PART NO. 986350-849</p>				<p>REV. 1</p>	<p>DATE</p>

4-2-12

408