
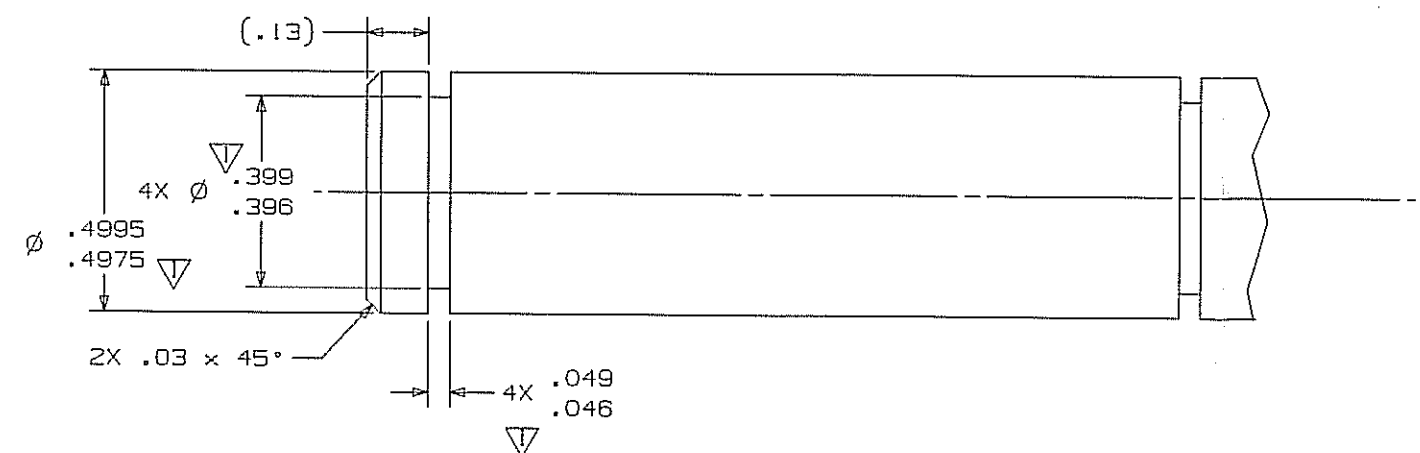


NOTES:

- 1. BREAK ALL EDGES AND CORNERS R.005-015 OR $\times 45^\circ$
- 2. ▽ INDICATES KEY DIMENSION TO BE CHECKED AT INCOMING Q.C.
- 3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	KMK	8/4/87	BCT 002301
B	.13 WAS .12, 15.380 WAS 15.396	LB	3/20/96	BCT 004023
C	REVISE NOTE 3	EK	8/08/11	BCT031039

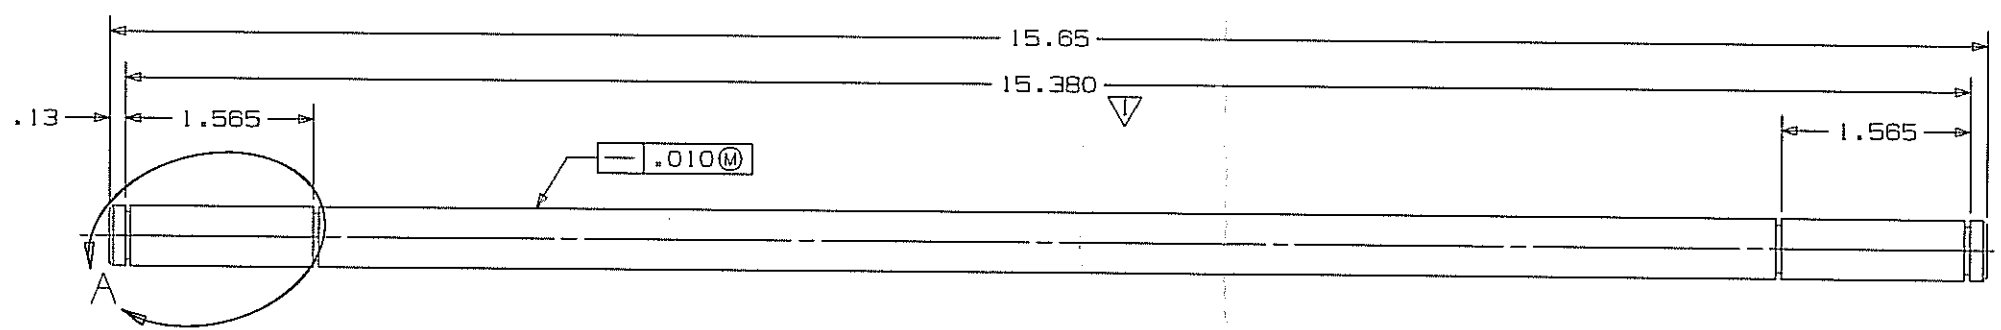

DETAIL A
SCALE 4:1

UG DWG.

6-29-11 408

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT INC.				10811 Collina Avenue Lakewood, Colorado 80215-4440 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1992 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE	
.X± 0.1 .XX± 0.01 .XXX± 0.005 .XXXX± 0.0020		ANGLES ± 2° SURF. FINISH 64 RMS		MATERIAL 6061-T6 ALUMINUM	
ORIGINATOR H. NGUYEN	DATE 10/1/88	PART NO. 777096-257			
DRAWN K. KLIMEK	DATE 10/8/88				
SIZE C	SCALE 1:1	DD NOT SCALE DWG	THIRD ANGLE PROJECTION	REV C	SHT OF 1/1