


| REV | REVISION DESCRIPTION                        | BY   | DATE     | ECO   |
|-----|---|------|----------|-------|
| A   | ORIGINAL RELEASE                            | 11/1 | 11/10/95 | 35683 |
| B   | ADDED DIAMONDS AND NOTE 2                   | 11/1 | 11/24/95 | 57363 |
| C   | CHANGED EDGE BREAK FROM .02-.04 TO .005-.03 | 11/1 | 11/29/95 | 59653 |

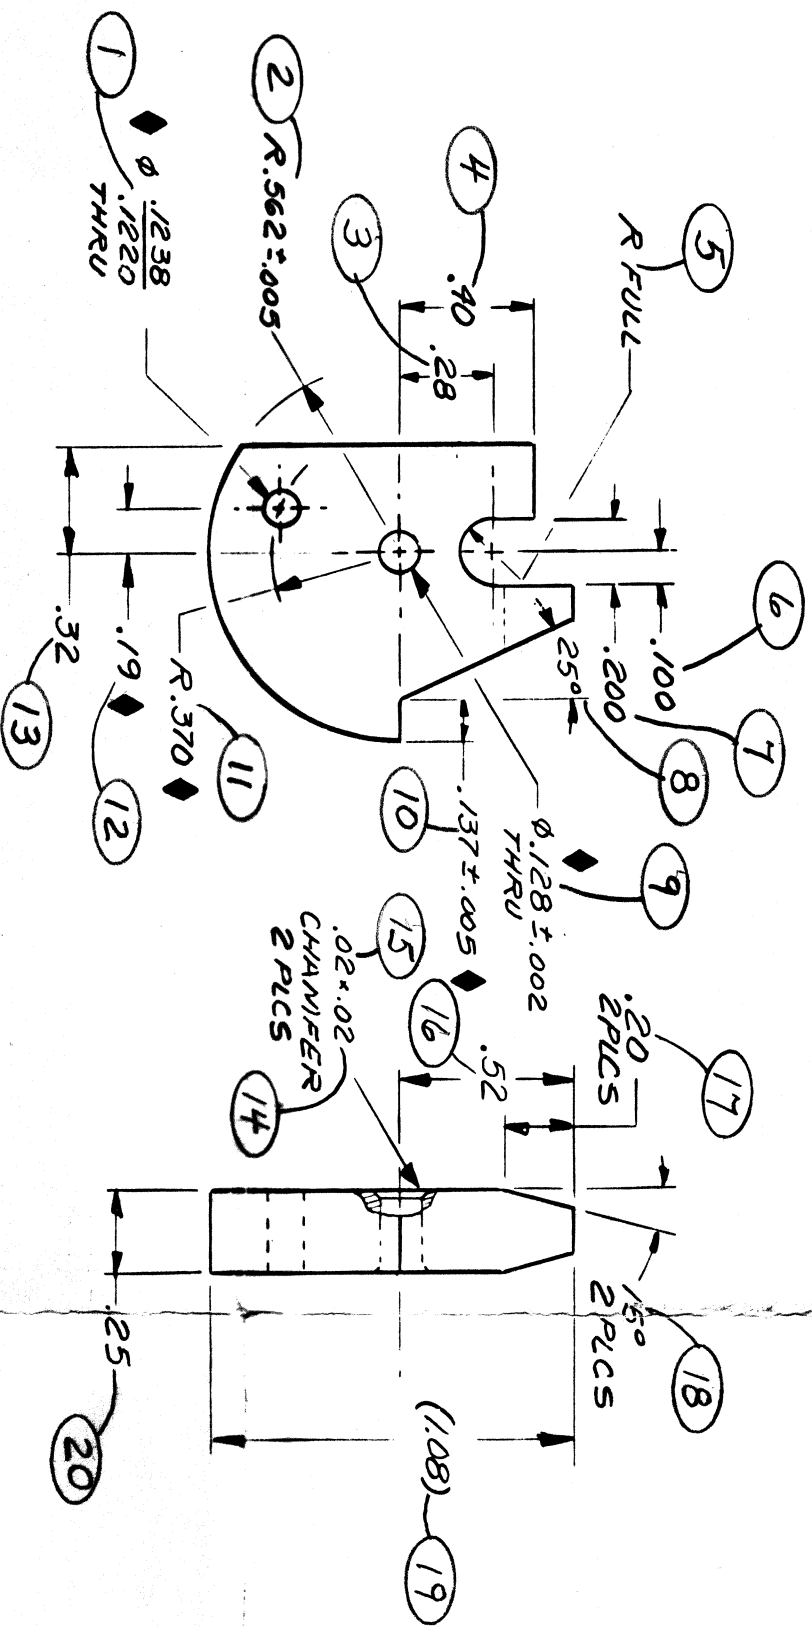

# NOTES:

1. DEBURR OR BREAK EDGES .005-.03
2. DIAMONDS INDICATE INSPECTION CRITERIA.

|  |  |   |  |
|--|--|---|--|
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF COBE LABORATORIES, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF COBE LABORATORIES, INC. |  | COBE BCT, Inc.<br>Best Component Technology<br>1201 Oak Street, Lakewood, CO 80215-4407 USA |  |
| TOLERANCES AND SYMBOLS<br>PER ANSI Y14.5M-1992<br>DIMENSIONS ARE IN INCHES<br>UNLESS OTHERWISE SPECIFIED<br>AFTER ADDITIVE FINISH  |  | MATERIAL<br>WHITE<br>DELRIN<br>(ACETAL 150)   |  |
| ANGLES<br>XX: .02<br>XXX: .010<br>SURE FINISH  |  | CHECKED<br>BMM<br>DATE<br>2/1/96  |  |
| SIZE<br>B<br>SCALE<br>1X<br>DO NOT SCALE<br>DIMENSIONS<br>1X   |  | PART NO.<br>777066-837<br>REV<br>C<br>SMT<br>OF<br>1  |  |

DATED PRINT  
11-3-95