
NOTES

- 1. BREAK ALL SHARP EDGES AND CORNERS.
- 2. INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.
- 3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 1A. CERTIFICATE OF COMPLIANCE TO BE PROVIDED IF CLEAR (NON-DYED) COATING IS APPLIED.

REV	REVISION DESCRIPTION		DATE	ECO #
Α	INITIAL RELEASE	JD	03/ _{30/10}	BCT027458

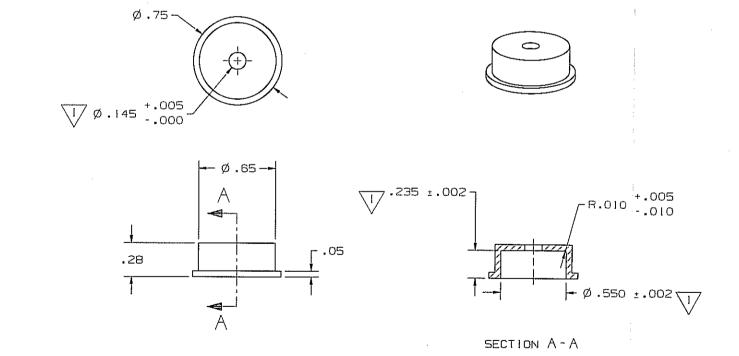

7-30-10 408

	THESE DRAWINGS AND SPECIFICATIONS AND SHALL NOT BE FERRINGED. SALE OF AFFARATILS RETROLT BEING	: AME THE PROPERTY OF CO-INICADET INC. COPIED, IN USED FOR WARFACTURE ON TEN PERMISSION OF CO-INICADET INC.	10811 Callins Avenue Lakerood, Calarado Bu215-4440
	TOLERANCES AND SYMBOLOGY PER ANSI Y14,584-1982 DIMERSIONS SPECIFIED AND AFTER ADDITIVE FINISH.	DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED MATERIAL	CaridianBCT EN
	.xx.0.04	ALUM	CAP, BOSS, BASIN
	SIZE SCALE DO PHILLIPPE	ORIGINATOR DATE	
UNIGRAPHICS		OLVES/20 GGOG NOT	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~