


NOTES:

1. ♦ INDICATES FEATURES TO BE CHECKED AT INCOMING Q.C.
2. BREAK AND DEBURR ALL SHARP EDGES R.015. MAX.
3 RACKING PERMITTED ON NOTED FEATURES ONLY.

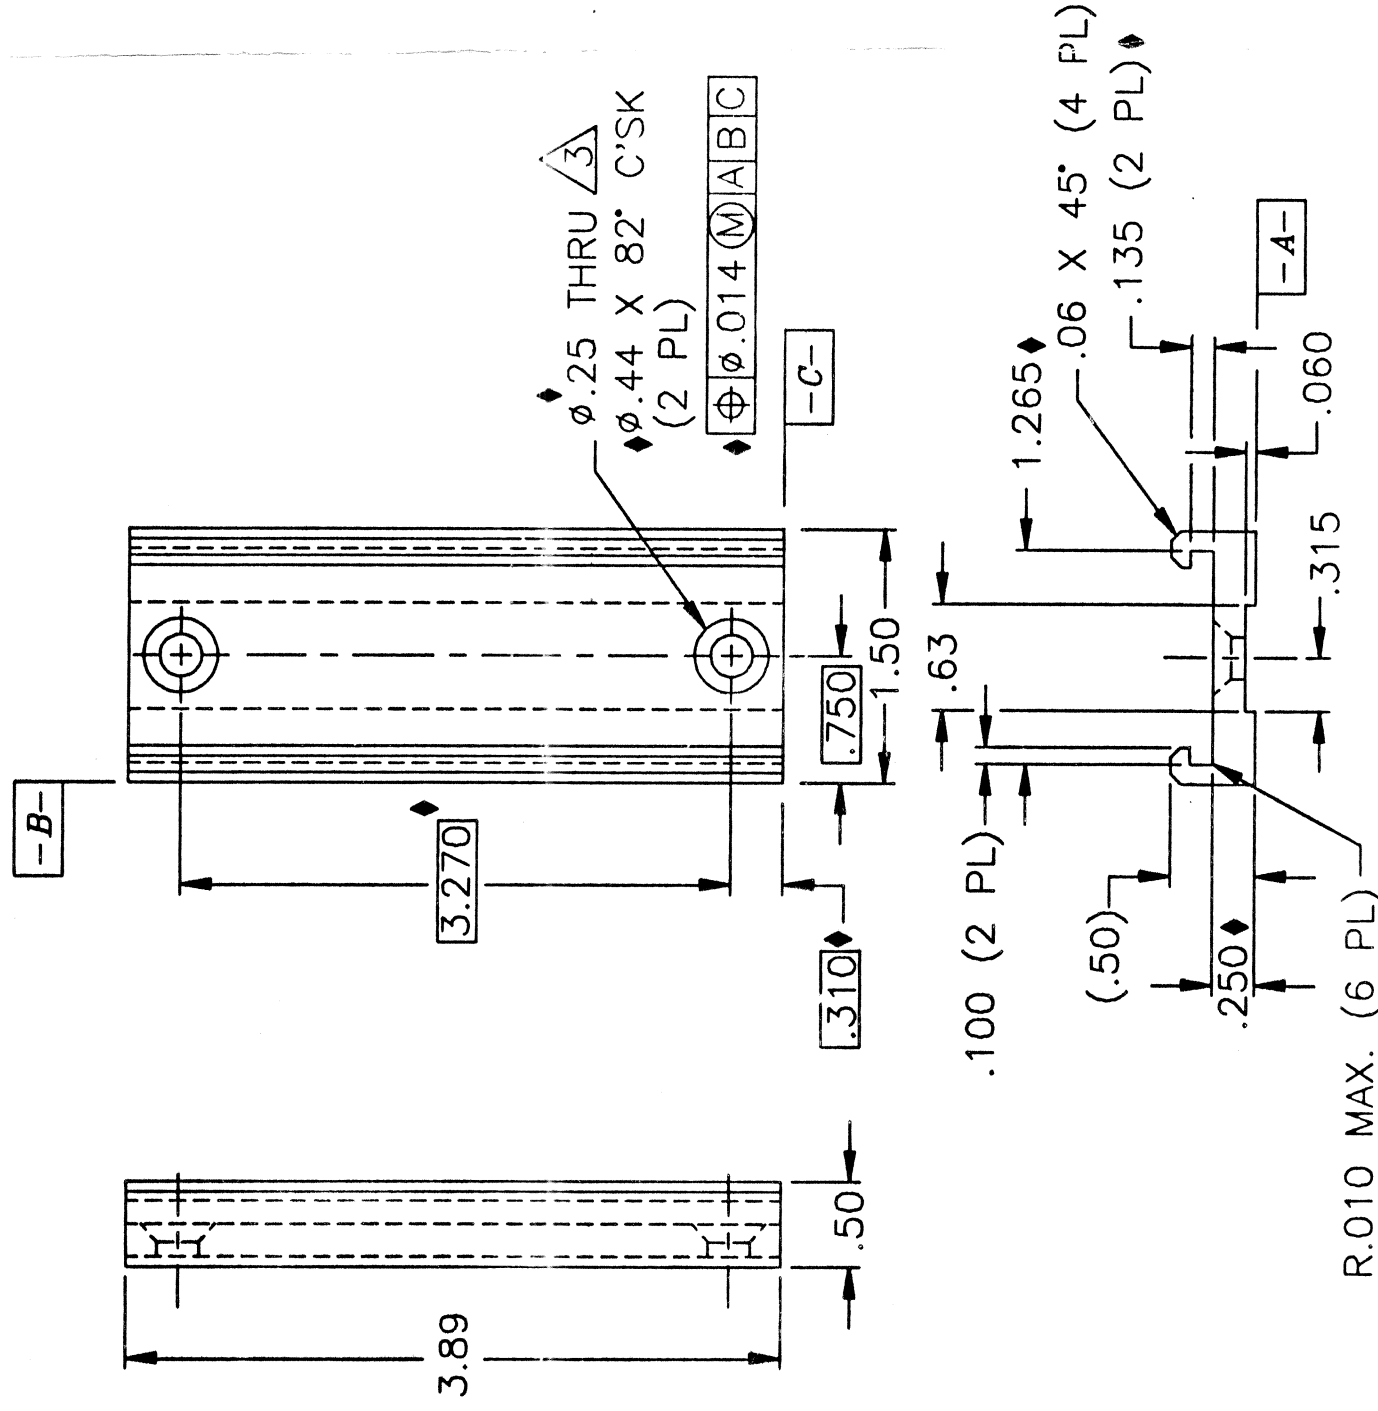

AUTOCAD DWG
ORIG DISK: xxx-xxx
FILE: 7067831.DWG

AUTOCAD GENERATED DRAWING

| REV | REVISION DESCRIPTION | BY | DATE | ECO # |
|-----|----------------------|-----|---------|-------|
| A | ORIGINAL RELEASE | VLF | 7/21/94 | 58791 |

- GENERAL SPECIFICATIONS FOR ANODIZED PART
- ANODIZE PER MIL-A-8525, TYPE II, CLASS 2, COLOR BLACK.
 - ALL DIMENSIONS TO BE HELD TO TOLERANCE AFTER ANODIZATION.
 - PERFORMANCE CHARACTERISTICS
 - PURPOSE OF COATING
 - DECORATIVE
 - CORROSION RESISTANCE
 - OTHER
 - SEALING (IF UNSPECIFIED, SEAL WITH WATER)
 - OTHER SEALANT REQUIRED. SPECIFY: NICKEL ACETATE
 - PROCESS
 - RACKING POINTS (ANODIZER'S DISCRETION, UNLESS SPECIFIED)
 - RACK ONLY ON FEATURES INDICATED WITH NOTE 3
 - MASKING OF HOLES AND/OR OTHER FEATURES
 - DO NOT MASK.
 - MASKING REQUIRED IN PLACE(S). SEE NOTE
 - QC INSPECTION CRITERIA
 - SAMPLING PLAN ACCEPTABLE (AQL 1.5).

| | | | |
|---|--------------|--|-----------------|
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF COBE BCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF COBE BCT INC. | | COBE BCT INC. Blood Component Technology a gemma company 1201 Oak Lakeside, Colorado 80113-4407 USA | |
| TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982 DIMENSIONS SPECIFIED ARE FIRST ANGLE PRACTICE. | | MATERIAL ALUMINUM 6061-T6 | |
| .X ± .1 ANGLES .XX ± .01 ± 2° .XXX ± .005 XXXX ± N/A | | SURF. FINISH 32 | |
| SIZE C | SCALE 1:1 | DATE 9/23/93 | DATE 2/19/92 |
| NO. OF SHEET 1 | | NO. OF SHEET 1 | |
| DRAWN J WALKER | | DRAWN J PAYLOR | |
| PART NO. 777067-831 | | REV A | |
| TITLE BRACKET, SLIP | | ECO # 58791 | |

408

7-25-94