


NOTES

- 1. BREAK ALL SHARP EDGES AND CORNERS.
- 2. USE CHROMATE CONVERSION PER MIL-C-5541.
- 3. INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.
- 4. DIMENSIONS ARE mm.

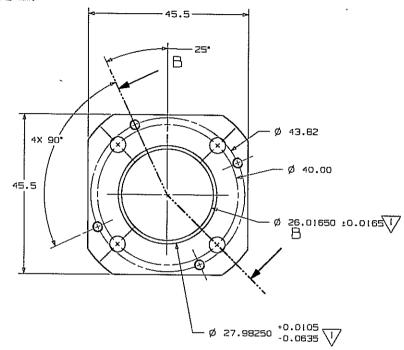




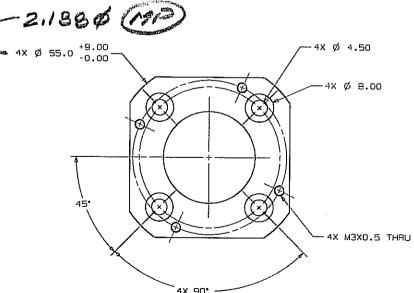



| REV | REVISION DESCRIPTION | BY | DATE | ECO • |
|-----|--|------|-----------|-----------|
| Α | INITIAL RELEASE | DANJ | ID/DOL/DO | BCT017932 |
| В | ADD 55mm DIAMETER TO ALLOW PARTS TO BE MADE FROM ROUND STOCK | | | BCT018174 |
| С | OPEN DIAMTER TOL TO EASE MFG RED | רמאם | 016467 | BCT018590 |

E 27,98250









7-10-07 408

| | | | | | | 1.000 | | |
|------------|------------|--|-------|-----------|----------------|-------------------|--|--|
| | | Here thereton and sprightfullone are the property of harmon per life, and their out is described, portly on much off means acting the same per personal acting the life of the personal acting the life. TO SERVICE AND STREET, PERSON OF THE P | | | | | | |
| | | | | | GAMBRO, BCT | | | |
| | TILDWICES | MILL INETER TOLERANCES | wares | MATERIAL | TITLE | | | |
| | .ki 0,04 | a. 1.0 | * _ | 7075-T6 | MOUNTING PLATE | | | |
| | -×-0.008 | #.#: D.Z | 3 | | I = = :::: | · · · | | |
| | .XXI+0.004 | H-EX: O. (C) SLEY, FINISH | | | HAD WOLD | HYD MOTOR | | |
| | .2020,0020 | E.EXX.0.050 | 1.6 | | | | | |
| | | SITE SCALE | | | PAST IS. | | | |
| NIGRAPHICS | | NONE | が 中山 | DANJ DATE | | c i j | | |