
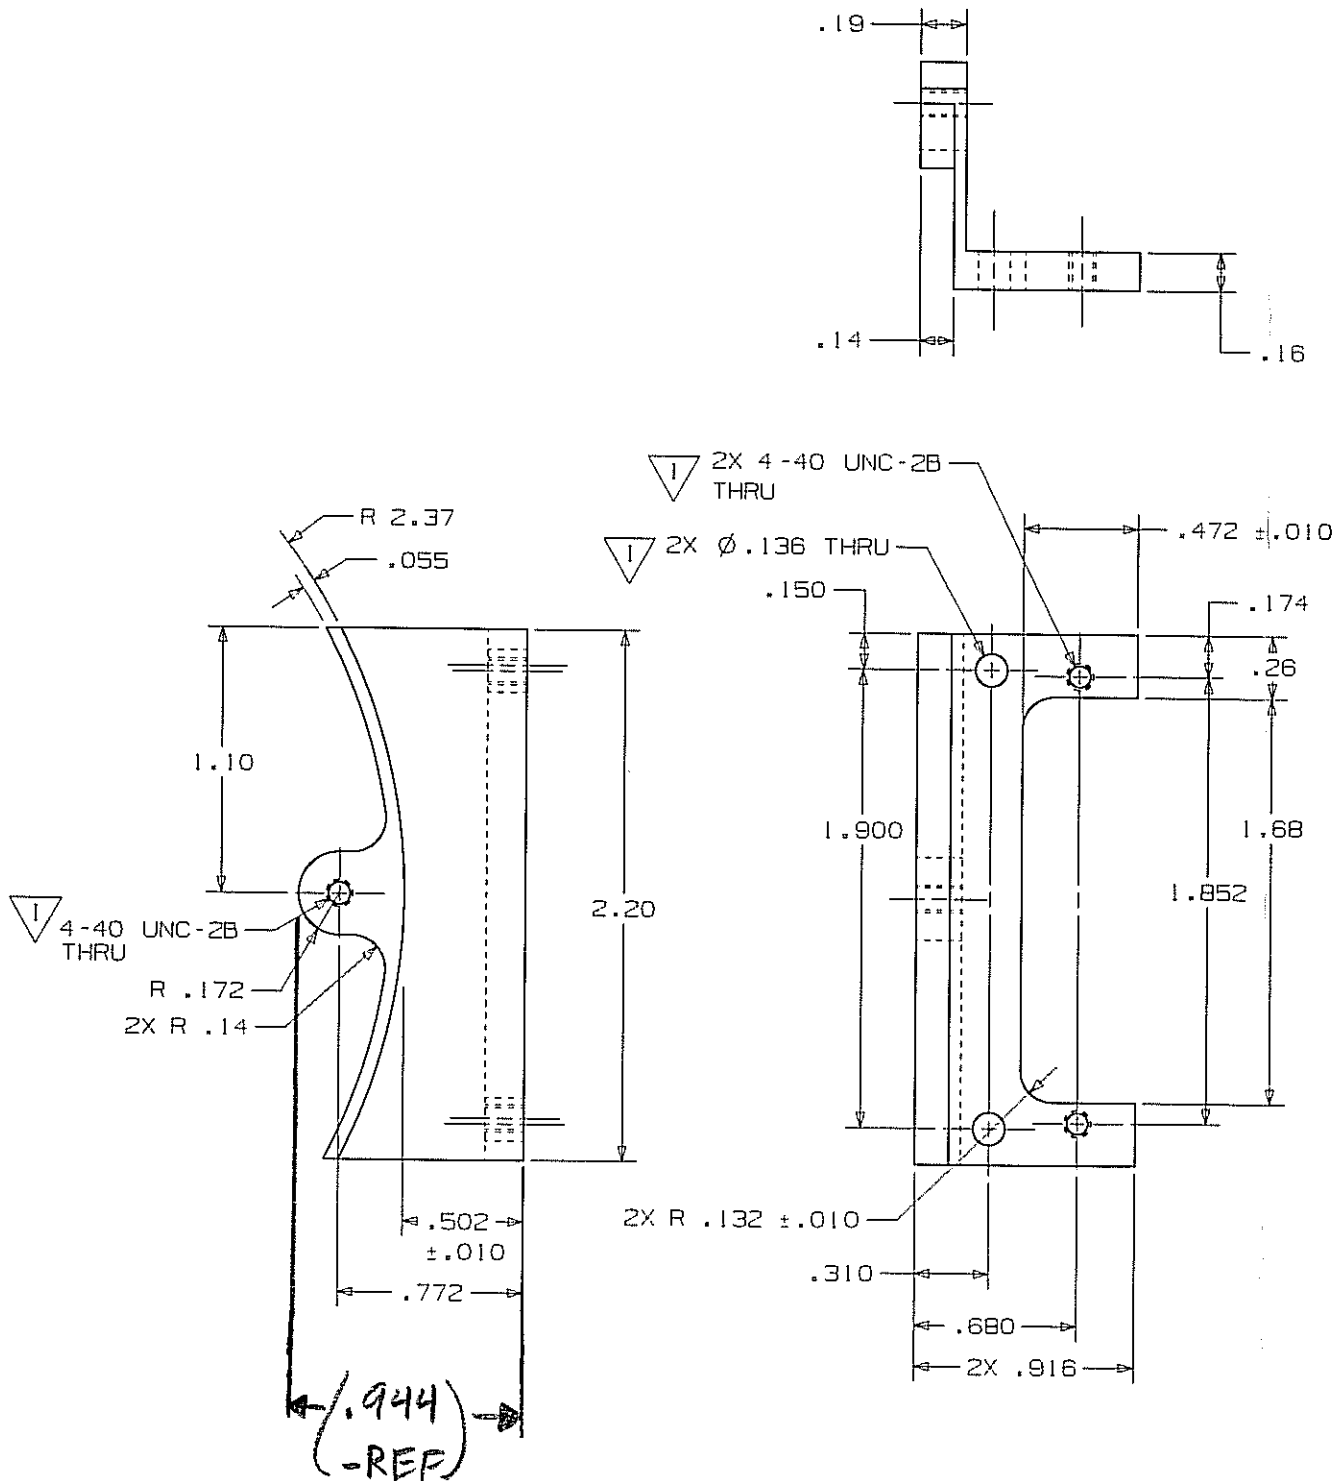
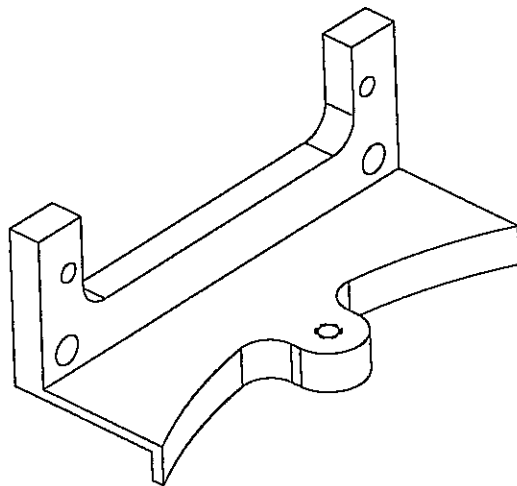


NOTES


1. BREAK ALL SHARP EDGES AND CORNERS.
2. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE 11 (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.
3.  INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.



REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	ORIGINAL RELEASE	SD	11/03/08	BCT018155
B	REVISED NOTE 2	EK	6/27/11	BCT031229



12-11-11 408

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT, INC.				 10811 Collina Avenue Lakewood, Colorado 80215-4440 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1992 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE	
.X ± 0.04 .XX ± 0.010 .XXX ± 0.005 .XXXX ± 0.0020		MATERIAL ALUMINUM 6061-T6		BRACKET, DB25	
ANGLES ± 1		SURF. FINISH 125		DATE	
ORIGINATOR		DATE		PART NO.	
SIZE C 2:1		SCALE NOT TO SCALE		DRAWN S DURKEE	
DO NOT SCALE		TWO-ANGLE PROJECTION		DATE 01/18/08	
UNIGRAPHICS		777094-224		REV B 1/1	