




NOTES


1. BREAK ALL SHARP EDGES AND CORNERS.
2. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.
3.  INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.

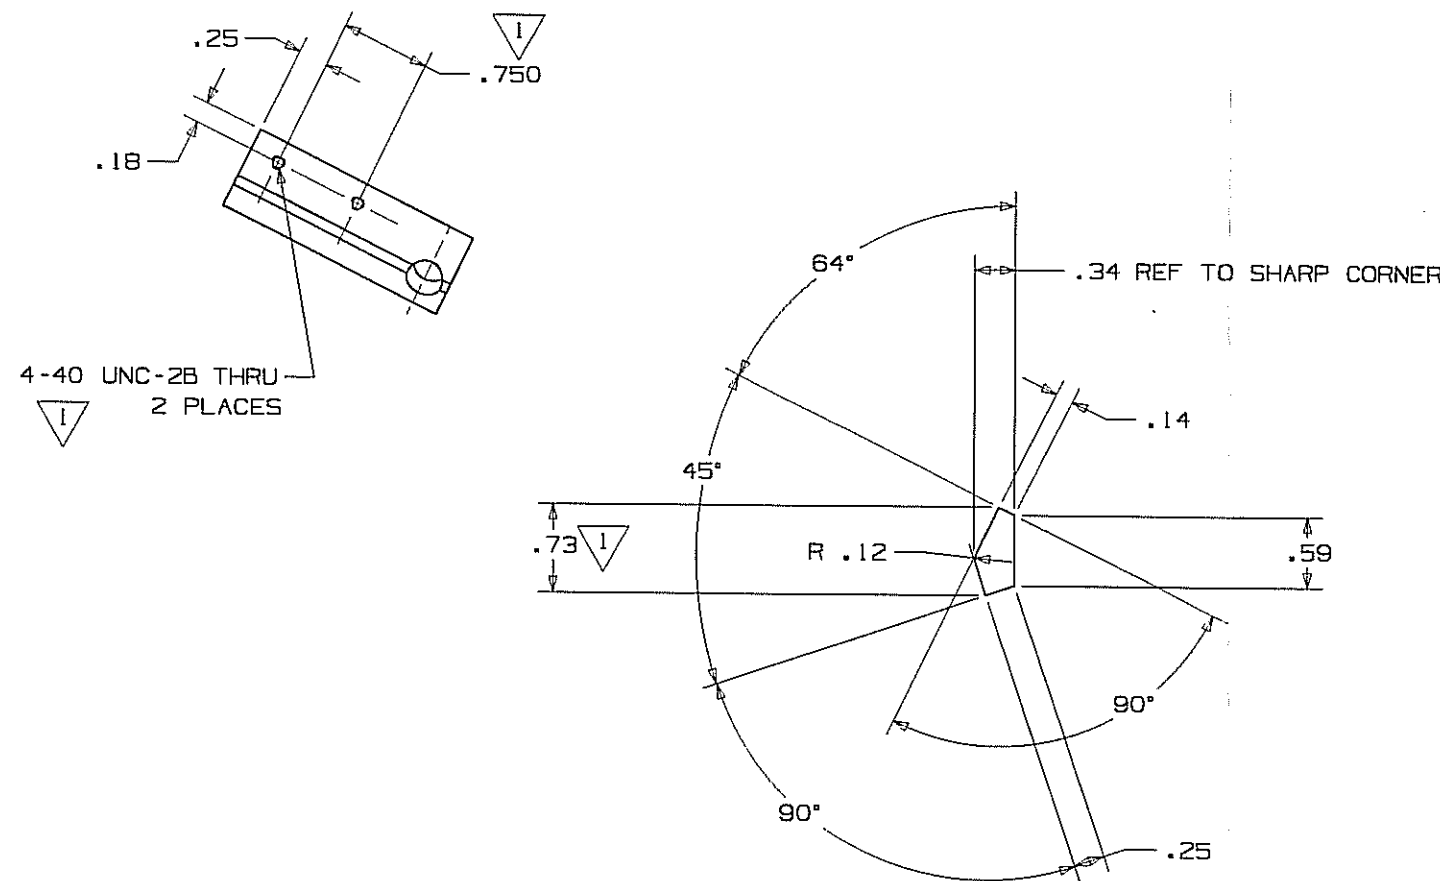

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	TP	01/18/07	BCT018718
B	REVISED NOTE 2	EK	08/27/11	BCT031229

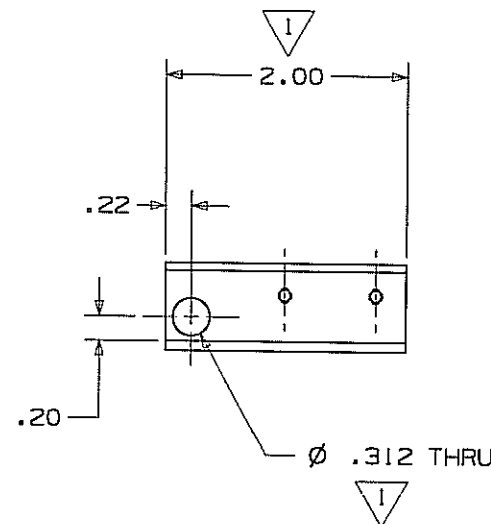

1-9-12 408

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT, INC.		 10611 Collina Avenue Lakewood, Colorado 80215-4440 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1992 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED	
.X = 0.02 .XX = 0.010 .XXX = 0.005 .XXXX = 0.0020		MATERIAL 6061-T6 ALUM	
ANGLES ± 2		ORIGINATOR	
SURF. FINISH 125 RMS		DATE	
SIZE C 1 1 1	SCALE 1 1 1	DATE 01/04/07	PART NO. 777094-391
DO NOT SCALE DWG	DATE 01/04/07	REV B	SHT OF 1/1