

NOTES

1. BREAK ALL SHARP EDGES AND CORNERS.

2. INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.

3. ANODIZE PART PER SPECIFICATION BELOW

A. COLOR: BLACK, TYPE II, PER MIL-A-8625C.

THICKNESS TO BE .0003" TO .0010"


B. PURPOSE OF COATING: CORROSION RESISTANT.

C. SEALANT: NICKEL ACETATE

D. RACKING POINTS AT DISCRETION OF ANODIZER.

NOTE: GAUGES TO BE USED AFTER COATING.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	JD	03/01/10	BCT027464

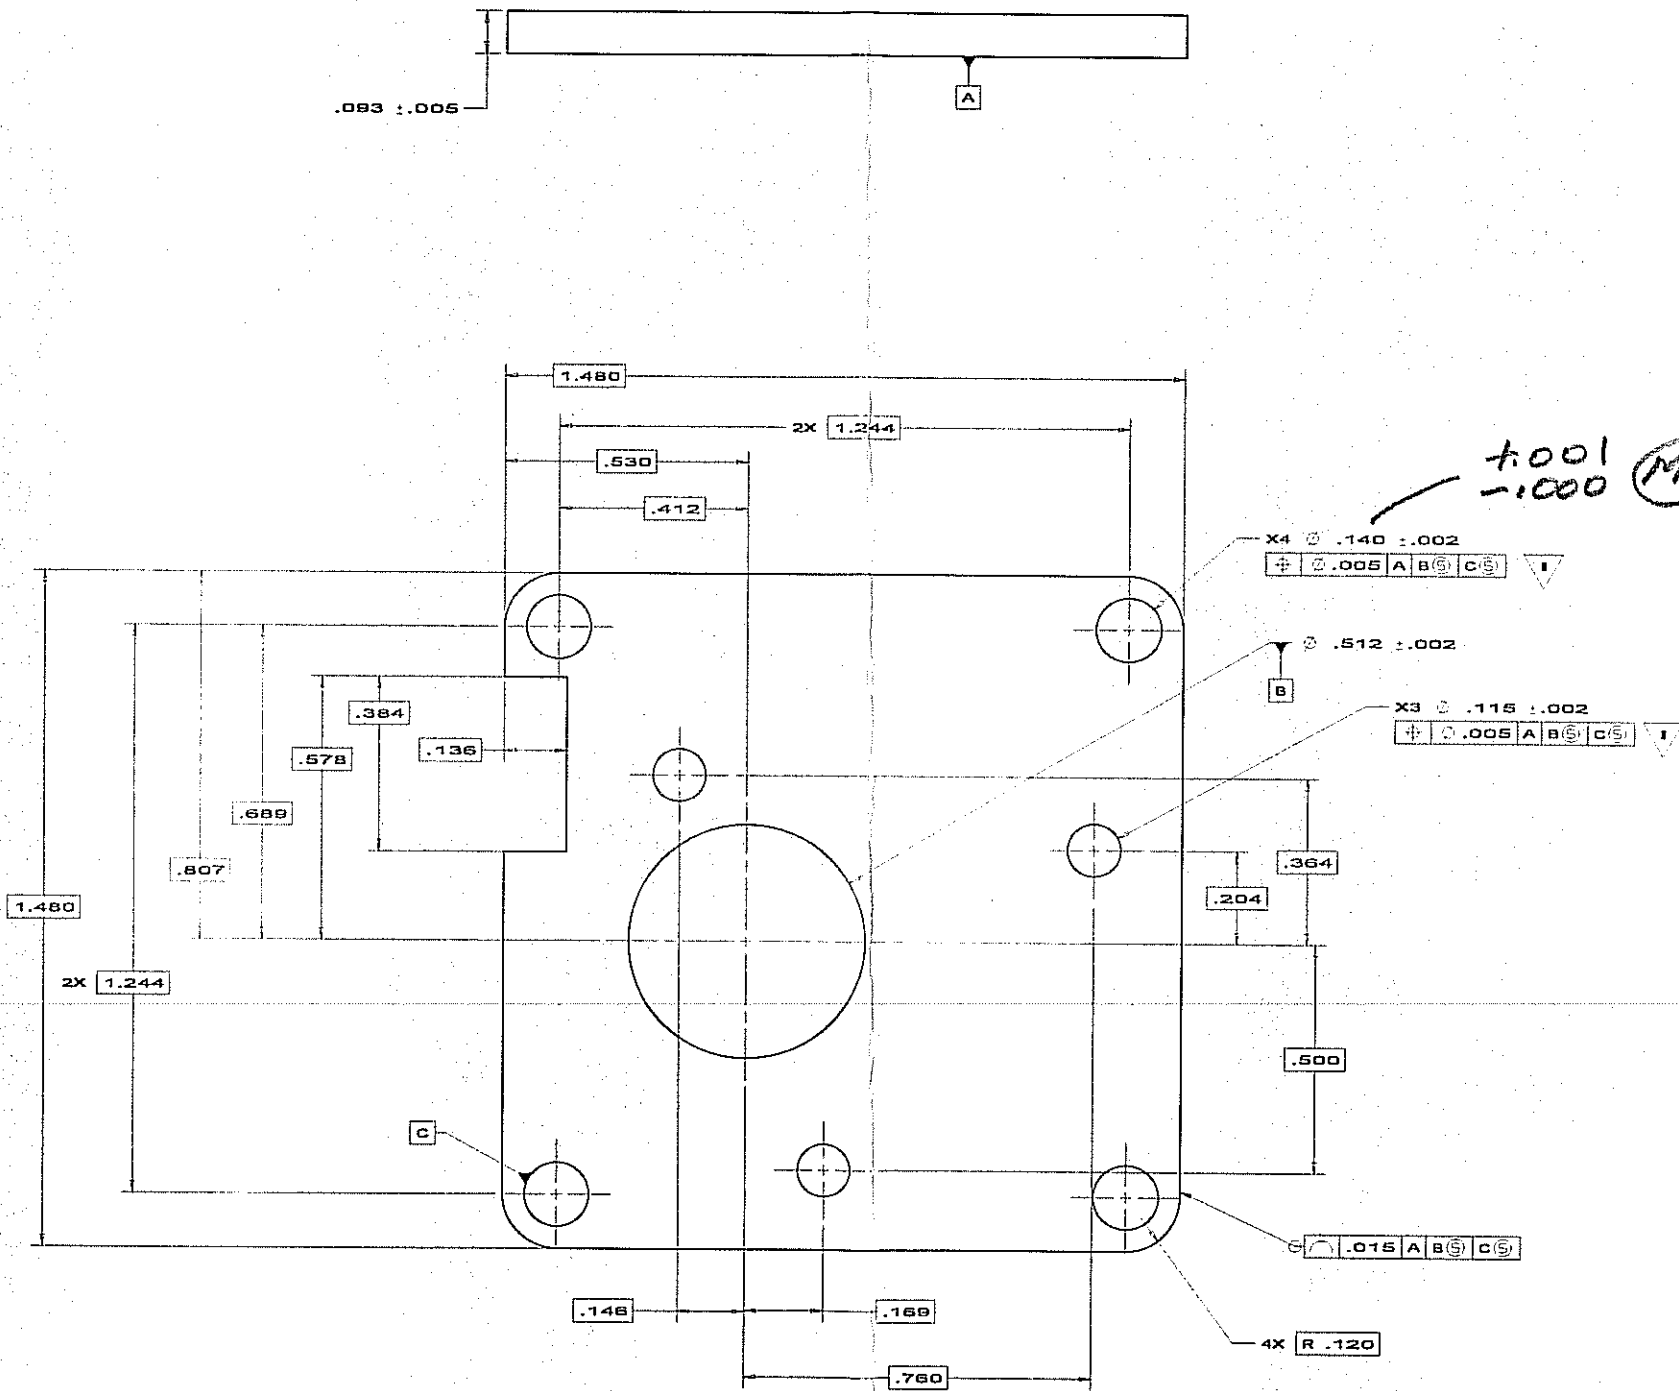

THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF CARLIDAN BCT. ALL RIGHTS ARE RESERVED. NO PART OF THIS DRAWING OR SPECIFICATIONS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM CARLIDAN BCT.		10411 Coloma Avenue Littleton, Colorado 80120-5000 USA	
TOLERANCES AND FINISHES UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONS ARE IN INCHES DECIMALS ARE IN INCHES ANGLES ARE IN DEGREES SURF. FINISH TEXTURE TEXTURE TEXTURE		MATERIAL ALUMINUM	
DATE 03/01/10		DATE 03/01/10	
DESIGN JON A. DODD		DATE 03/01/10	
PART NO. 004100-108		REV A	
SIZE D		SHEET OF 1/1	

6-2-10 408