
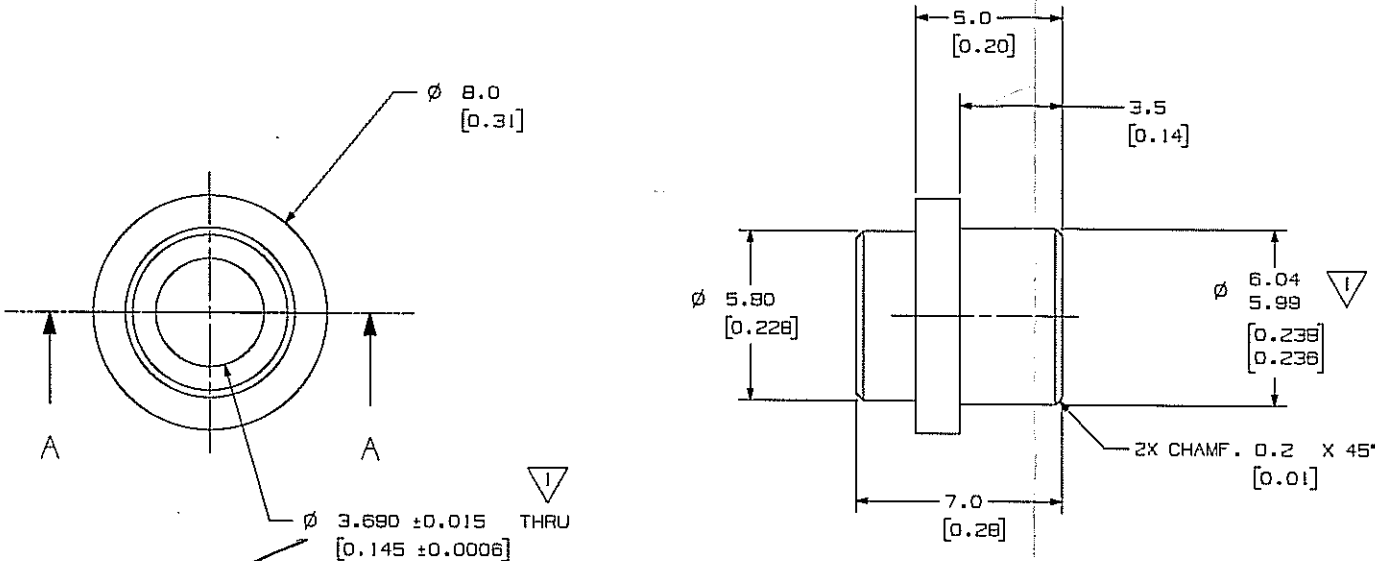




- NOTES
- 1. BREAK ALL SHARP EDGES AND CORNERS.
 - 2.  INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.

| REV | REVISION DESCRIPTION | BY | DATE | ECO # |
|-----|--------------------------------------|-----|---------|-----------|
| A | INITIAL RELEASE, REPLACES 986301-669 | REM | 8/20/10 | BCT028560 |
| B | ID WAS 3.70/3.68 | REM | 08/10 | BCT028701 |



3.690 ± 0.015 (MP)
3.675 Gage Pin
must Fall thru



8-30-11 408

| | | | | | | | |
|--|-----------------------|--------------|---|---|------------|-----|-----|
| TOLERANCES AND SPECIFICATIONS ARE THE PROPERTY OF CARLIDIAN BCT, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF CARLIDIAN BCT, INC. | | | | 10011 Cellin Avenue Lakewood, Colorado 80215-4440 USA | | | |
| TOLERANCES AND SPECIFICATIONS FOR THIS DRAWING: DIMENSIONS SPECIFIED ARE UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED. | | | | CaridianBCT | | | |
| INCH TOLERANCES | MILLIMETER TOLERANCES | ANGLES | MATERIAL | TITLE | | | |
| .XX ± 0.04 | XX ± 0.10 | 2 | PEEK (POLY ETHER- ETHER-KEYTONE) BLACK | BUSHING, ATREUS VALVE ACTUATOR | | | |
| .XX ± 0.008 | XX ± 0.2 | 2 | | | | | |
| .XXX ± 0.004 | XXX ± 0.10 | SURF. FINISH | | | | | |
| .XXXX ± 0.0020 | XXXX ± 0.050 | | | | | | |
| SIZE | SCALE | DO NOT SCALE | DATE | DATE | PART NO. | REV | BY |
| UNIGRAPHICS | 08:1 | 08 | ELLINGBOE | 08/13/07 | 986302-443 | 8 | I/I |