




NOTES

1. BREAK ALL SHARP EDGES AND CORNERS.
2.  INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.
3. GENERAL SPECIFICATIONS FOR ANODIZED PART:
- A. COLOR: BLACK, TYPE II, PER MIL-A-8625C. THICKNESS TO BE .0003" TO .0009"
 - B. PURPOSE OF COATING: CORROSION RESISTANT.
 - C. SEALANT: NICKEL ACETATE
 - D. RACKING POINTS AS SHOWN

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	JD	03/30/06	BCT027464

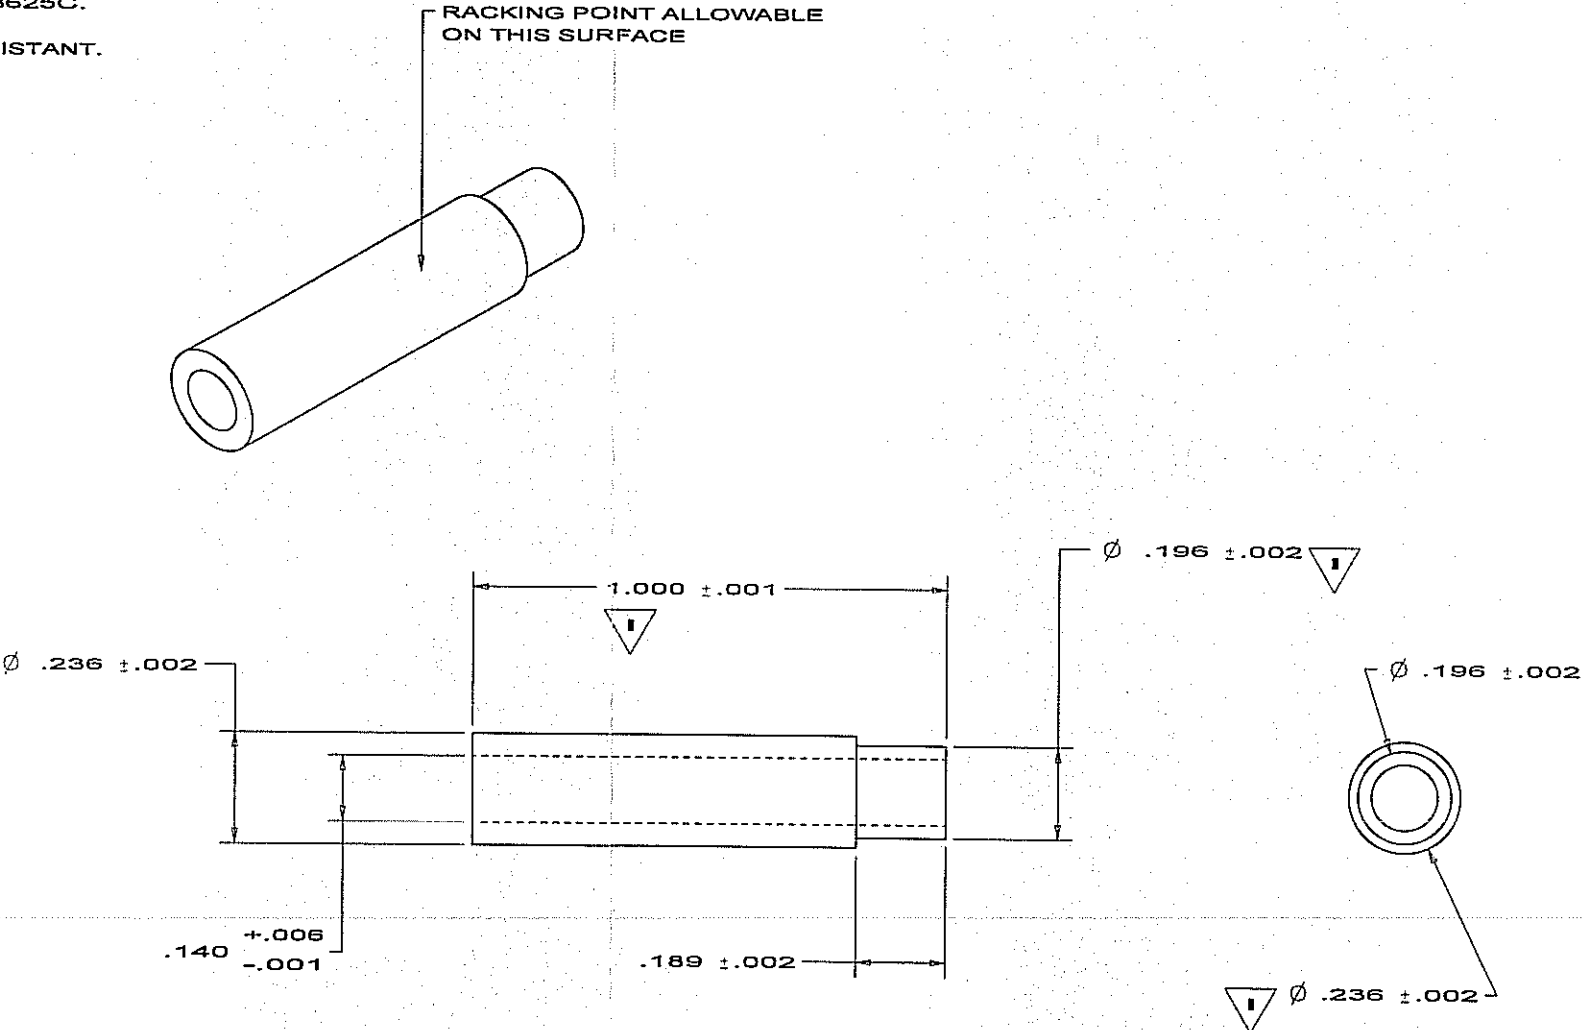

7-30-10 408

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CARLIDIAN BCT, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CARLIDIAN BCT, INC.				 10811 Collins Avenue Littlewood, Colorado 80120-4440 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1994 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		MATERIAL ALUMINUM	
.X± 0.04 .XX± 0.010 .XXX± 0.005 .XXXX± 0.0020		ANGLES ± 3° SURF. FINISH		ORIGINATOR DATE	
SIZE C 4/1		SCALE DO NOT SCALE DWG		DRAWN JON DODD	
UNIGRAPHICS		DATE 01/27/10		PART NO. 004100-109	
				REV A	
				DWT / OF 1 / 1	