

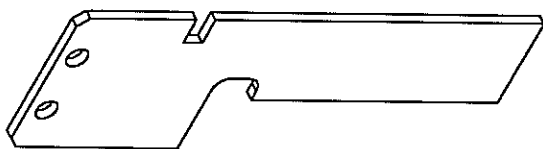


NOTES:

- 1. REMOVE ALL BURRS AND SHARP EDGES  
R.02 OR X 45°.
- 2.  INDICATES KEY DIMENSIONS TO BE  
CHECKED AT INCOMING Q.C.
- 3. APPLY CHROMATE CONVERSION COATING PER  
MIL-DTL-5541F, TYPE II (ROHS COMPLIANT,  
NON-HEXAVALENT), CLASS 3. CERTIFICATE OF  
COMPLIANCE TO BE PROVIDED.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	CH	3/10/97	BCT 001905
B	3.06 WAS 3.25; 2.938 WAS 3.125	CH	5/12/97	BCT 002175
C	1.12 WAS 1.06; HOLES WERE $\phi$ .125	CH	8/12/97	BCT 002765
D	REVISED NOTE 3	EK	8/08/11	BCT 031039

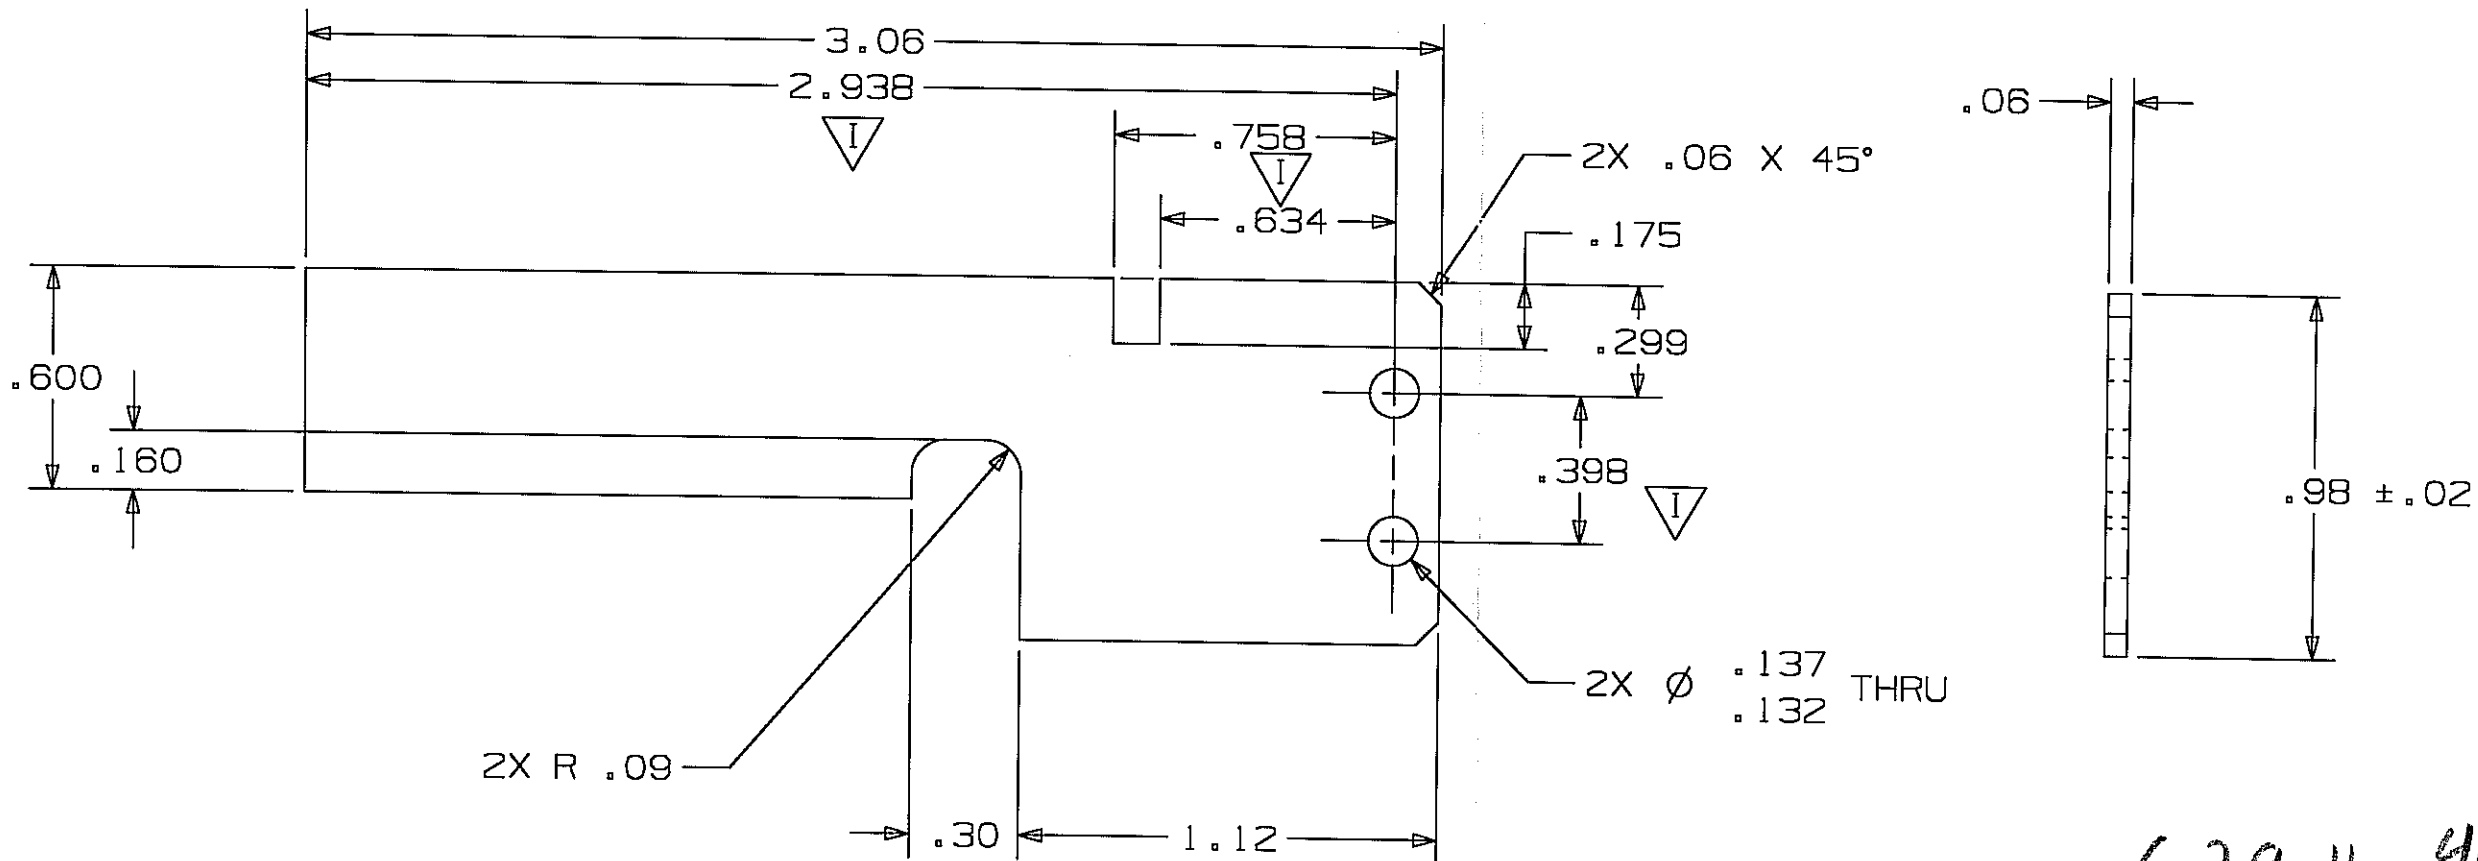

UG DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT INC.  
AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR  
SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT INC.

TOLERANCES AND SYMBOLS  
PER ANSI Y14.5M-1982  
DIMENSIONS SPECIFIED ARE  
AFTER ADDITIVE FINISH.

.X± 0.1	±
.XX± 0.01	2
.XXX± 0.005	SURF. FINISH
.XXXX± 0.0010	125 RMS

DIMENSIONS ARE IN INCHES UNLESS  
OTHERWISE SPECIFIED

MATERIAL  
6061-T6  
ALUMINUM

ORIGINATOR  
C HAKE

DATE  
8/30/96

DRAWN  
C HAKE

DATE  
8/30/96



10811 Collins Avenue  
Lakewood, Colorado 80215-4440  
USA

TITLE

SENSOR FLAG,  
LINEAR ACTUATOR

PART NO.

777096-130

REV

D

SHT

1

OF

1