





- I. BREAK ALL SHARP EDGES AND CORNERS.
- 2. INDICATES KEY FEATURES TO BE VERIFIED AT INCOMING INSPECTION.
- 3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE 11 (NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLAINCE TO BE PROVIDED WHEN CLEAR (NON-DYED) COATING IS APPLIED.



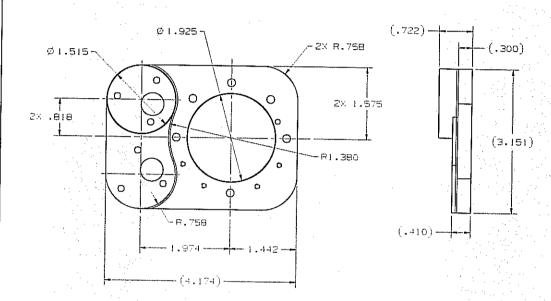


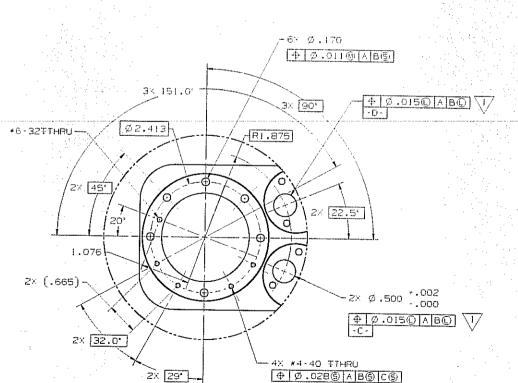




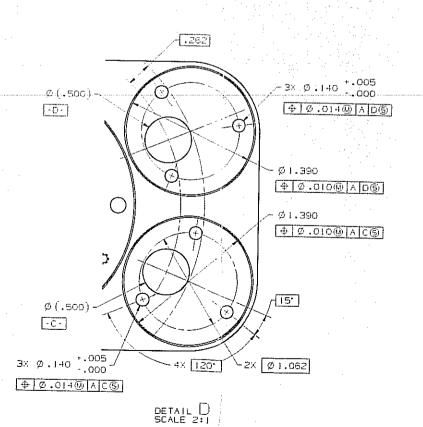

REV	REVISION DESCRIPTION	BY	DATE	ECO .
Α	INTIAL RELEASE	CH	01647	BCT026756
В	ADDED MISSING DIMENSIONS: Ø2.413, 20', ZX 29', POSITIONAL TOLOG AV 44-40 HOLES		h • /	BCT027515

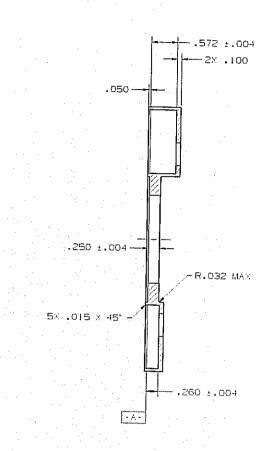

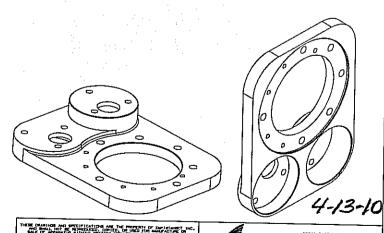

SECTION A - A

THE PUBLICATION AND PRESENTATION OF THE PROPERTY OF DEPTH AND THE PUBLICATION OF DEPTH AND THE PUBLICAT

408