

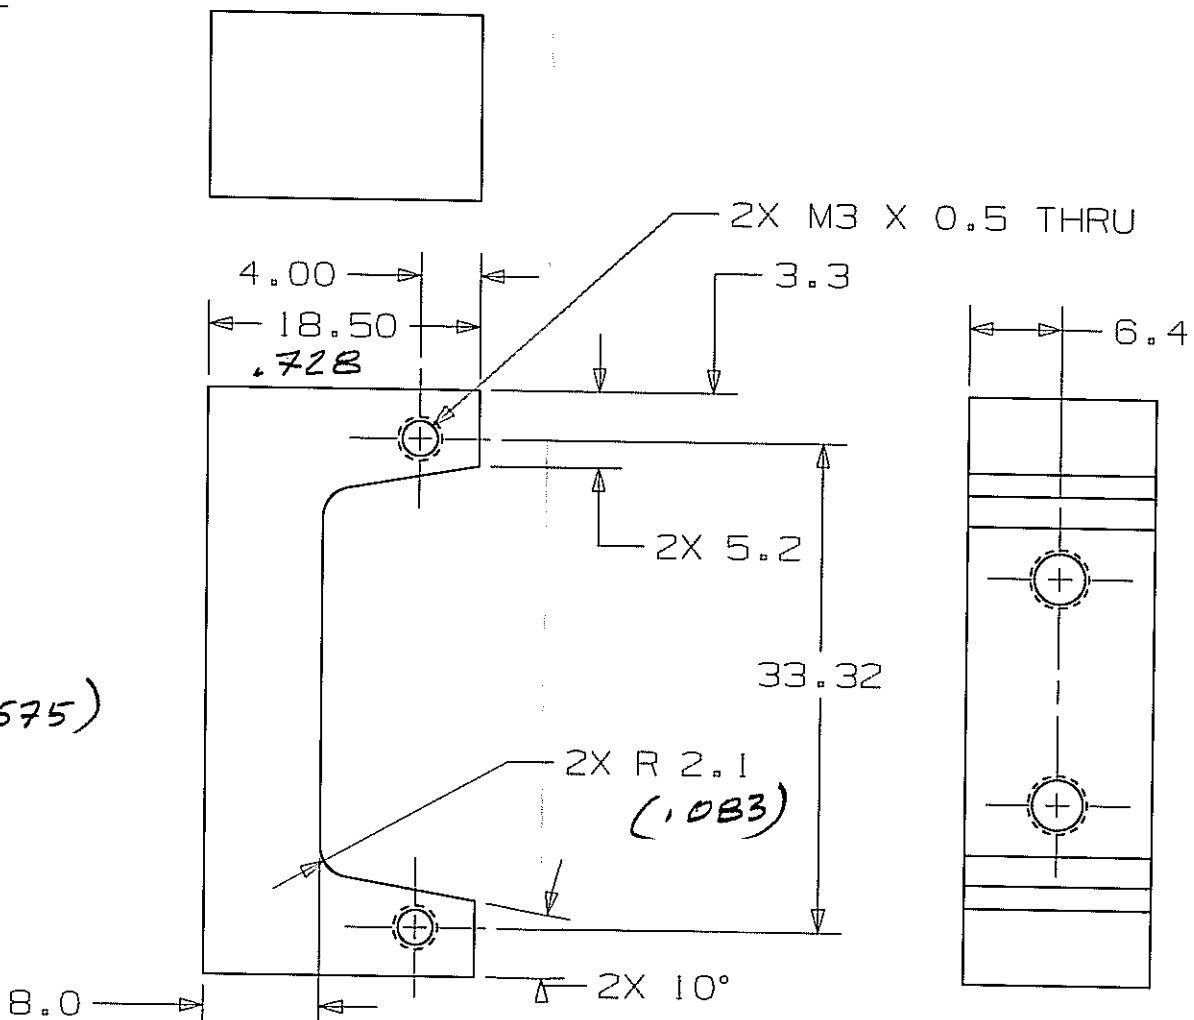



NOTES

- 1. BREAK ALL SHARP EDGES AND CORNERS.
- 2.  INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.
- 3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	ORIGINAL RELEASE	DANJ	08/12/05	BCT015540
B	REVISED NOTE 3	EK	7/14/11	BCT031385

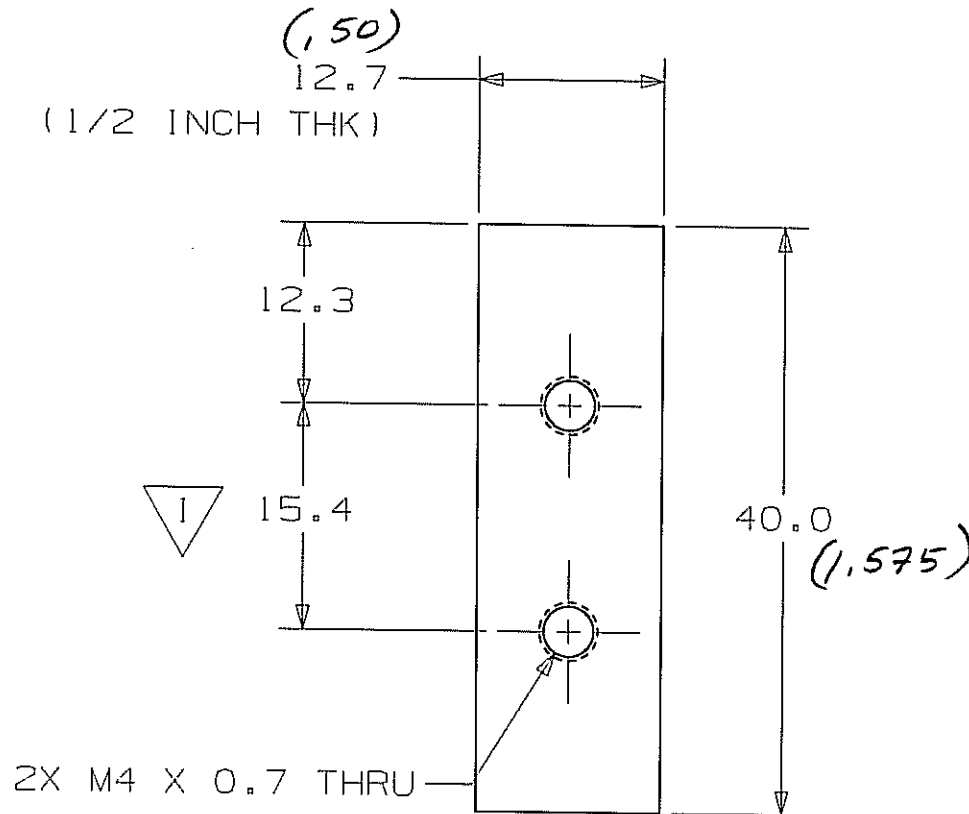

5-9-12 40B

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT INC.				 <div>10811 Collins Avenue Lakewood, Colorado 80215-4440 USA</div>			
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1992. DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH. DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED. DIMENSIONS IN ( ) ARE IN INCHES.				TITLE  BRACKET, CONNECTOR			
INCH TOLERANCES	MILLIMETER TOLERANCES	ANGLES	MATERIAL	PART NO. 986100-348			
.X± 0.04	X± 1.0	± 2°	ALUMINUM 6061-T6				
.XX± 0.008	X.X± 0.2	SURF. FINISH		REV	SHT	OF	
.XXX± 0.004	X.XX± 0.10			B	1	1	
.XXXX± 0.0020	X.XXX± 0.050						
UNIGRAPHICS		SIZE B	SCALE 2:1	DO NOT SCALE DWG	THIRD ANGLE PROJECTION	DRAWN J. GUIDO	DATE 06/08/04