




NOTES

1. BREAK ALL SHARP EDGES AND CORNERS.
2. HARDEN TO Rc 45-50.
3.  INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING Q.C.
4. PASSIVATE PER QQ-P-35

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	KMK	2/15/00	BCT 007136
B	NOTE #4 WAS PASSIVATE PER MIL-P-47090A TYPE I	KMK	06/26/00	BCT007802

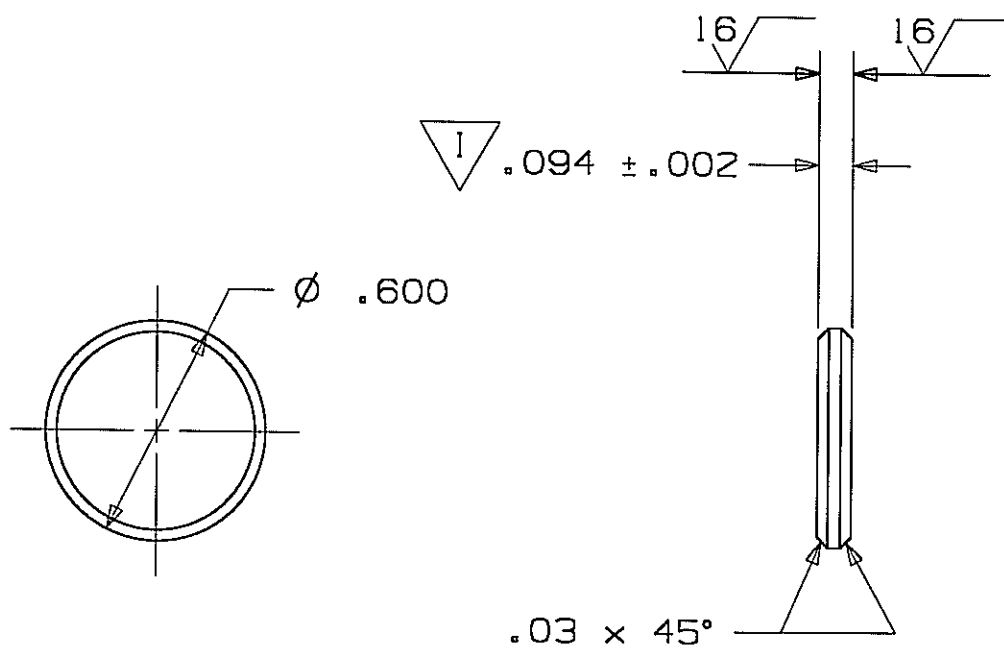

7-20-09 408

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT INC.				 10811 Collins Avenue Lakewood, Colorado 80215-4440 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE	
.X ± 0.10 .XX ± 0.01 .XXX ± 0.005 .XXXX ± 0.0020		ANGLES ± 2° SURF. FINISH 125 RMS		MATERIAL 440C SST	
ORIGINATOR K. KLIMEK		DATE 10/26/99		PART NO.	
DRAWN K. KLIMEK		DATE 10/26/99		REV B	
SIZE B		SCALE 2:1		SHT 1	
OF 1		OF 1		OF 1	

UG DWG.