
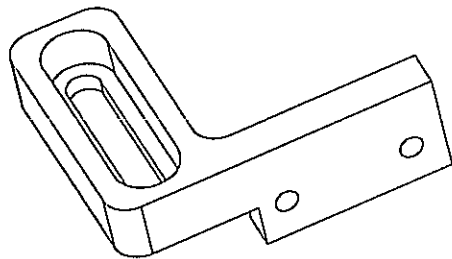


NOTES

1. BREAK ALL SHARP EDGES AND CORNERS.
2. ▽ INDICATES FEATURE/DIMENSION TO BE CHECKED AT INCOMING INSPECTION.
3. USE CHROMATE CONVERSION PER MIL-C-5541.

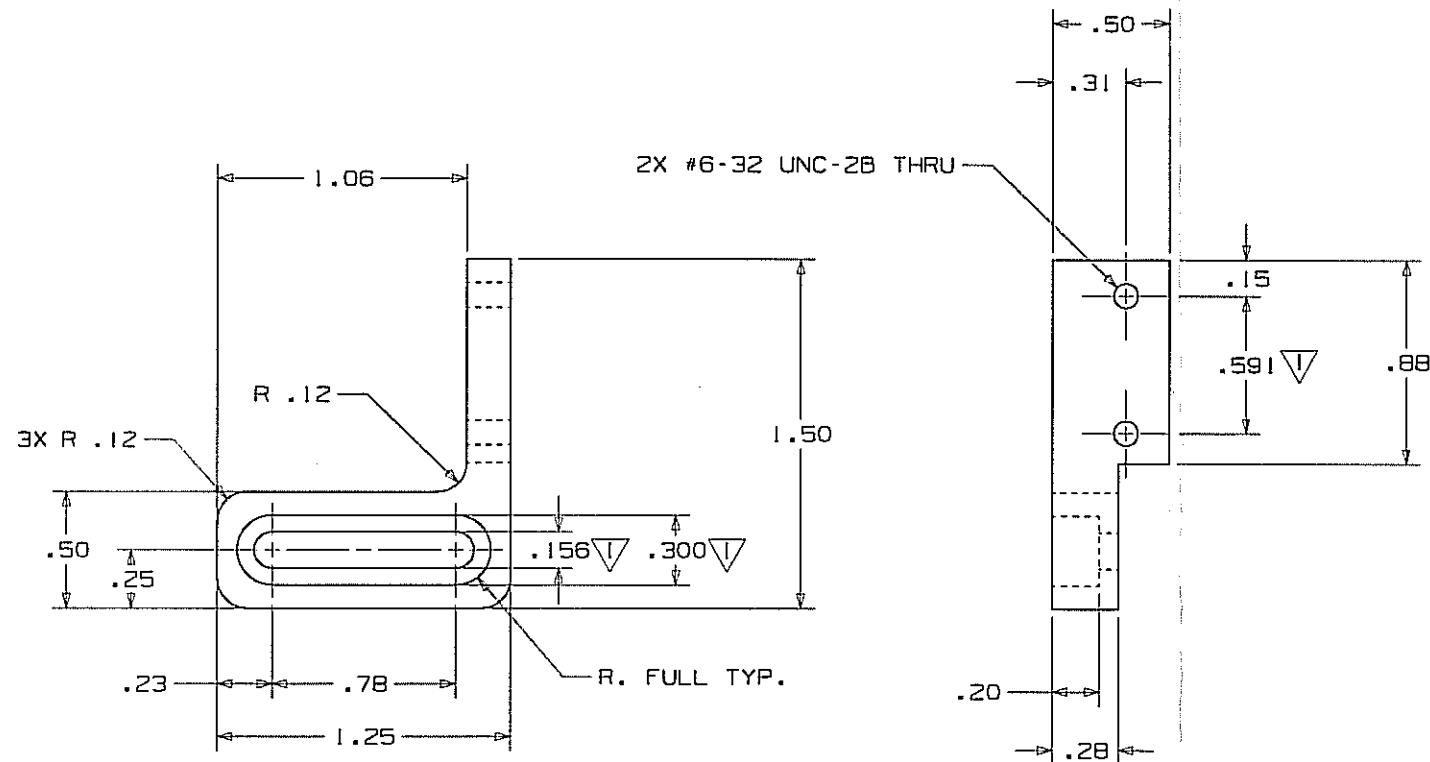

12-14-05 408

REV	NAVIGANT REVISION DESCRIPTION (FOR HISTORICAL REFERENCE ONLY)	BY	DATE	CCF #
1	ORIGINAL RELEASE	KMK	08/08/04	080304LG
A	FINISH WAS ELECTROLESS NICKEL, REMOVED NOTE #4 (MASK NOTED FEATURES) MOVED TO ALPHA REV	KMK	12/18/04	120104KW
B	TRANSFERRED TO BCT DOCUMENTATION CONTROL SYSTEM	KW	10/20/05	02905KW

REV	GAMBRO BCT REVISION DESCRIPTION	BY	DATE	ECO #
B	TRANSFERRED FROM NAVIGANT DOCUMENTATION CONTROL SYSTEM, ADDED INSPECTION DIAMONDS	JBB	10/31/05	BCT 015886

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF GAMBRO BCT INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF GAMBRO BCT INC.		10811 Collins Avenue, Greenwood, Colorado 80215-4440 USA	
TOLERANCES AND SYMBOLOGY PER ANSI Y14.5M-1982 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		GAMBRO BCT	
.XX ± 0.04 .XX ± 0.010 .XXX ± 0.005 .XXXX ± 0.0020		TITLE TRIGGER MOUNT, SAFETY SWITCH	
ANGLES ± 2°		MATERIAL 6061-T6 ALUMINUM	
SURF. FINISH 63RMS		ORIGINATOR DATE	
SIZE SCALE DO NOT SCALE DWG		PART NO. 777073-188	
UNIGRAPHICS		REV B	
DRAWN K. KLIMEK		DATE 08/04	
DATE 08/04		SHEET 1 OF 1	

Quote
5
30