

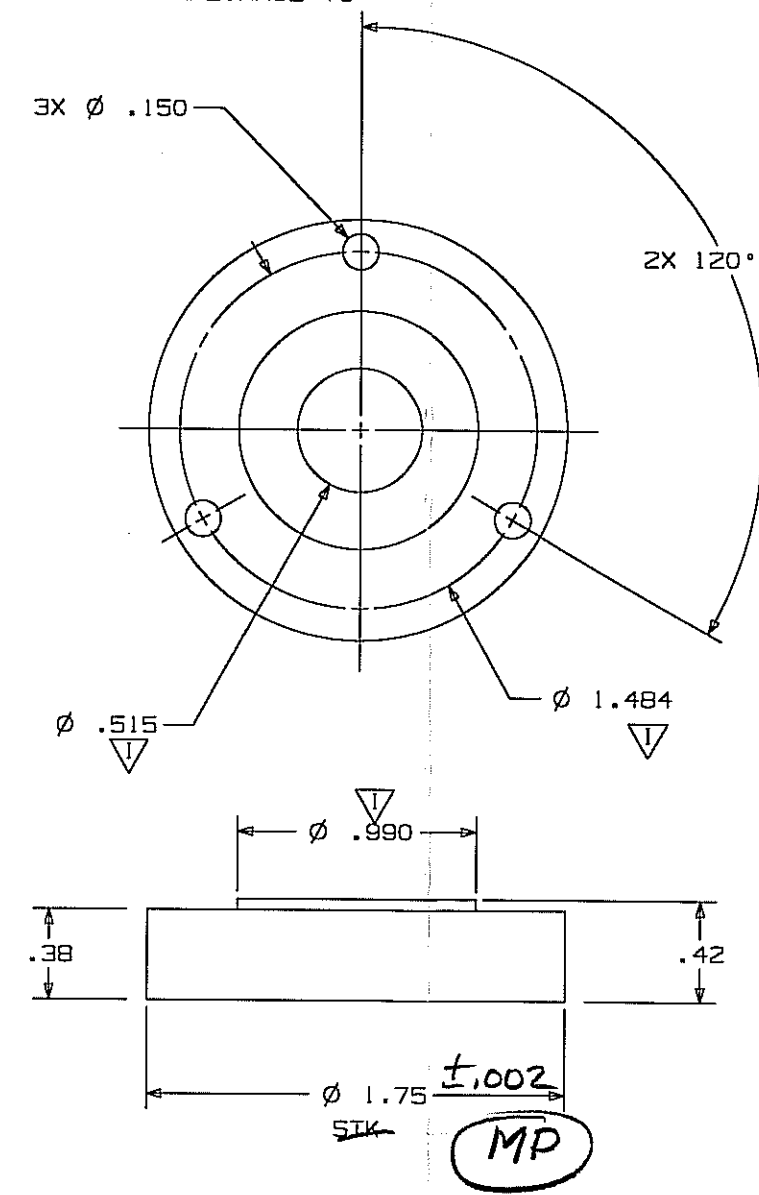


NOTES:


1.  INDICATES KEY FEATURES TO BE VERIFIED AT INCOMING INSPECTION.
2. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES .02R (OR 45°).
3. APPLY CHROMATE CONVERSION COATING PER MIL-DTL-5541F, TYPE II (ROHS COMPLIANT, NON-HEXAVALENT), CLASS 3. CERTIFICATE OF COMPLIANCE TO BE PROVIDED.

REV	REVISION DESCRIPTION	BY	DATE	ECO #
A	INITIAL RELEASE	CH	8/18/97	BCT 002363
B	Ø.990 WAS Ø1.010	CH	10/7/97	BCT 003101
C	REDESIGN FOR COST	CH	3/3/98	BCT 005560
D	REVISED NOTE 3	EK	8/08/11	BCT 031039



6-10-11 408

UG DWG

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CaridianBCT, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION OF CaridianBCT, INC.				 10811 Collina Avenue Lakewood, Colorado 80215-4410 USA	
TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982 DIMENSIONS SPECIFIED ARE AFTER ADDITIVE FINISH.		DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TITLE	
.X± 0.1 .XX± 0.01 .XXX± 0.005 .XXXX± 0.0020		MATERIAL ALUMINUM 6061-T6		CAP, BUTTON HOUSING, IV	
ORIGINATOR C HAKE		DATE 8/8/97		PART NO. 777096-476	
SIZE C 2:1		SCALE NOT SCALE		REV D 1/1	