

NOTES:

- 1. BREAK ALL EDGES AND CORNERS R.005-015 DR x 45*
- 2. V INDICATES KEY DIMENSION TO BE CHECKED AT INCOMING O.C.
- A INSTALL DOWEL PINS AS SHOWN.
- 4. PASSIVATE PER DO-P-35, EXCEPT WAIVE SALT SPRAY TEST.

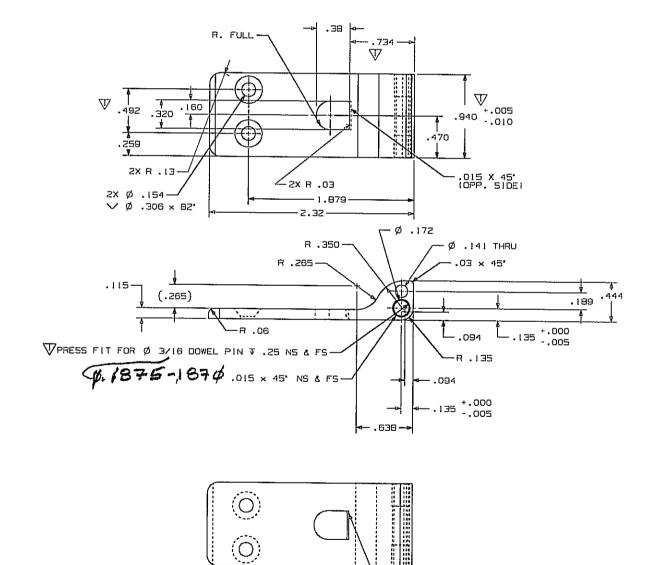


-.015 X 45" (2X)

REV	REVISION DESCRIPTION	Вч	DATE	ECC .	
Α	INITIAL RELEASE, REPLACES 777096-713	JCW.	10/24/0	BCT009695	
В	MATERIAL WAS 316 SST	HEM	114370	BCTOI144B	
С	DELETED NOTE 4 FOR BRUSH FINISH REQUIREMENTS.			BCT014561	

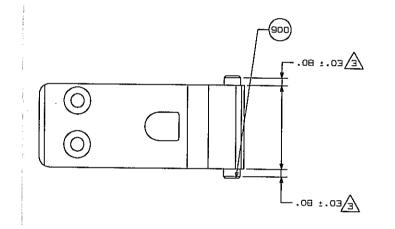

UG DWG.



6-15-09 408

900	2	EΑ	7	79029-505	119	, DWL.	303 5ST,	3/16,	3/	8
I TEM	OTY	UZM		PART NO.		DESCRIPTION				
				BILL	OF	REF	ERENCE			
teem pr	2 1,43	A THE		1	10011 Cattle					
ID FRANCE AND STREET OF FER AND THE CONTINUE OF STREET OF THE CONTINUE OF THE			LOUT ME	DIMENSIONS AND IN THE	CE OUTES		ridianBCT	LESA		
,1, ,21,	.34 0.1 MOLES .214 0.01 ± * .224 0.005 SLIFT, FINISH		300 SERIES SST		ARM, LATCH FILLER HEX					
PERSON.	·0025		RMS	OTIBINATOR K. KLIMEK	3/23/00 PATE			, ,_,	•	
<u>D</u>	1:1	몺		K. KLIMEK	3/23/00		7098-2	51	Č	i / i

303 5.5,