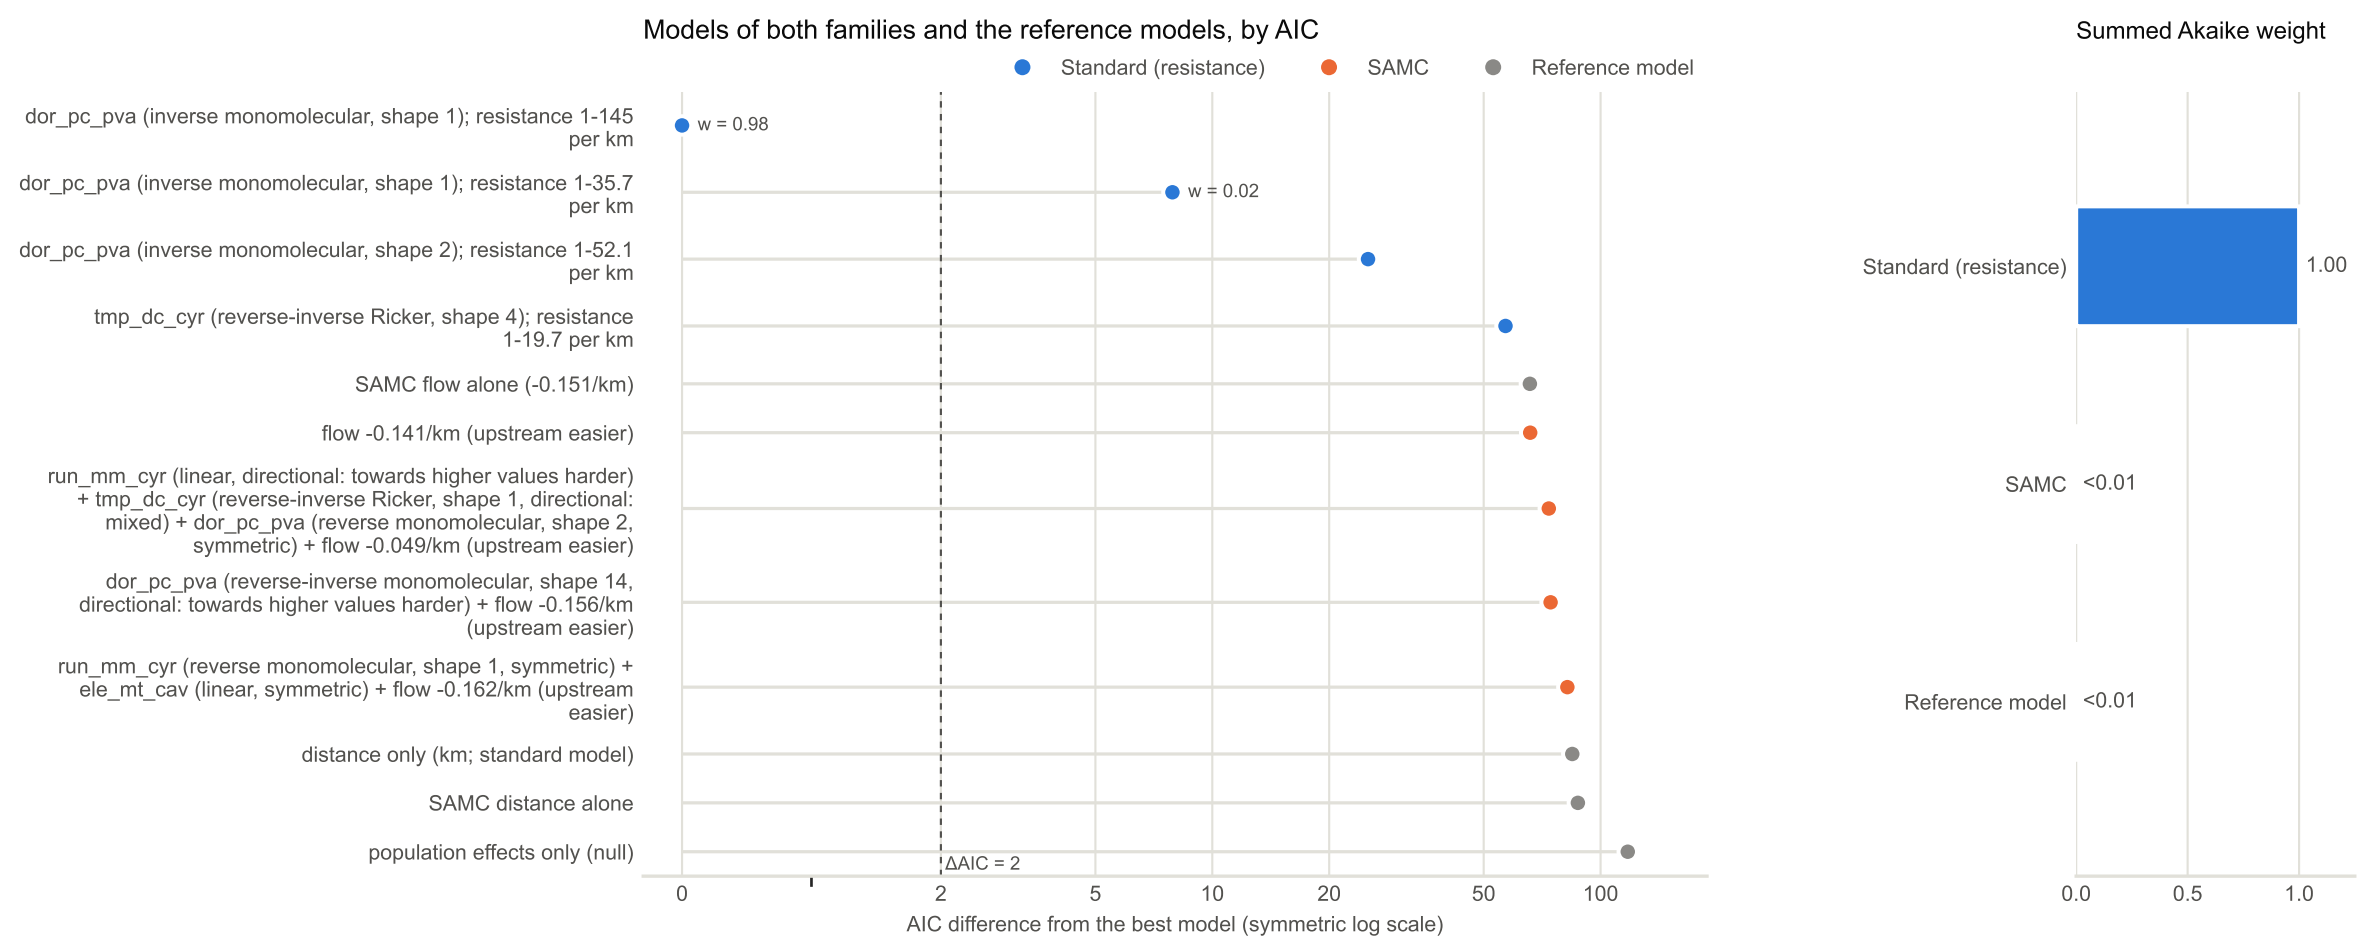
Models of both families and the reference models, by AIC
Standard (resistance)
SAMC
Reference model
dor_pc_pva (inverse monomolecular, shape 1); resistance 1-145 per km
dor_pc_pva (inverse monomolecular, shape 1); resistance 1-35.7 per km
dor_pc_pva (inverse monomolecular, shape 2); resistance 1-52.1 per km
tmp_dc_cyr (reverse-inverse Ricker, shape 4); resistance 1-19.7 per km
SAMC flow alone (-0.151/km)
flow -0.141/km (upstream easier)
run_mm_cyr (linear, directional: towards higher values harder) + tmp_dc_cyr (reverse-inverse Ricker, shape 1, directional: mixed) + dor_pc_pva (reverse monomolecular, shape 2, symmetric) + flow -0.049/km (upstream easier)
dor_pc_pva (reverse-inverse monomolecular, shape 14, directional: towards higher values harder) + flow -0.156/km (upstream easier)
run_mm_cyr (reverse monomolecular, shape 1, symmetric) + ele_mt_cav (linear, symmetric) + flow -0.162/km (upstream easier)
distance only (km; standard model)
SAMC distance alone
population effects only (null)
w = 0.98
w = 0.02
ΔAIC = 2
0
2
5
10
20
50
100
AIC difference from the best model (symmetric log scale)
Summed Akaike weight
Standard (resistance)
1.00
SAMC
<0.01
Reference model
<0.01
0.0
0.5
1.0