


(a) bi-GRU — original ETER-Net arm

arm 668.2M parameters, of which GRU stack 637.1M

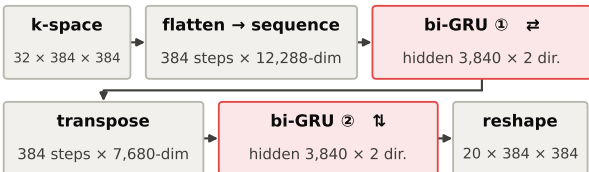

Each step consumes a 12,288-dim (7,680-dim) slice of the flattened k-space tensor, so the input-to-hidden matrices alone are $12,288 \times 11,520$ and $7,680 \times 11,520$ per direction ($\rightarrow 637\text{M}$), and the 384 steps run strictly sequentially.

(b) SS2D — controlled substitution

arm 31.2M parameters, of which SSM stack 0.117M (same 20-ch output as bi-GRU)

