



(a) Pure ETER-Net backbone (controlled comparison) — no ViT, no data-consistency block

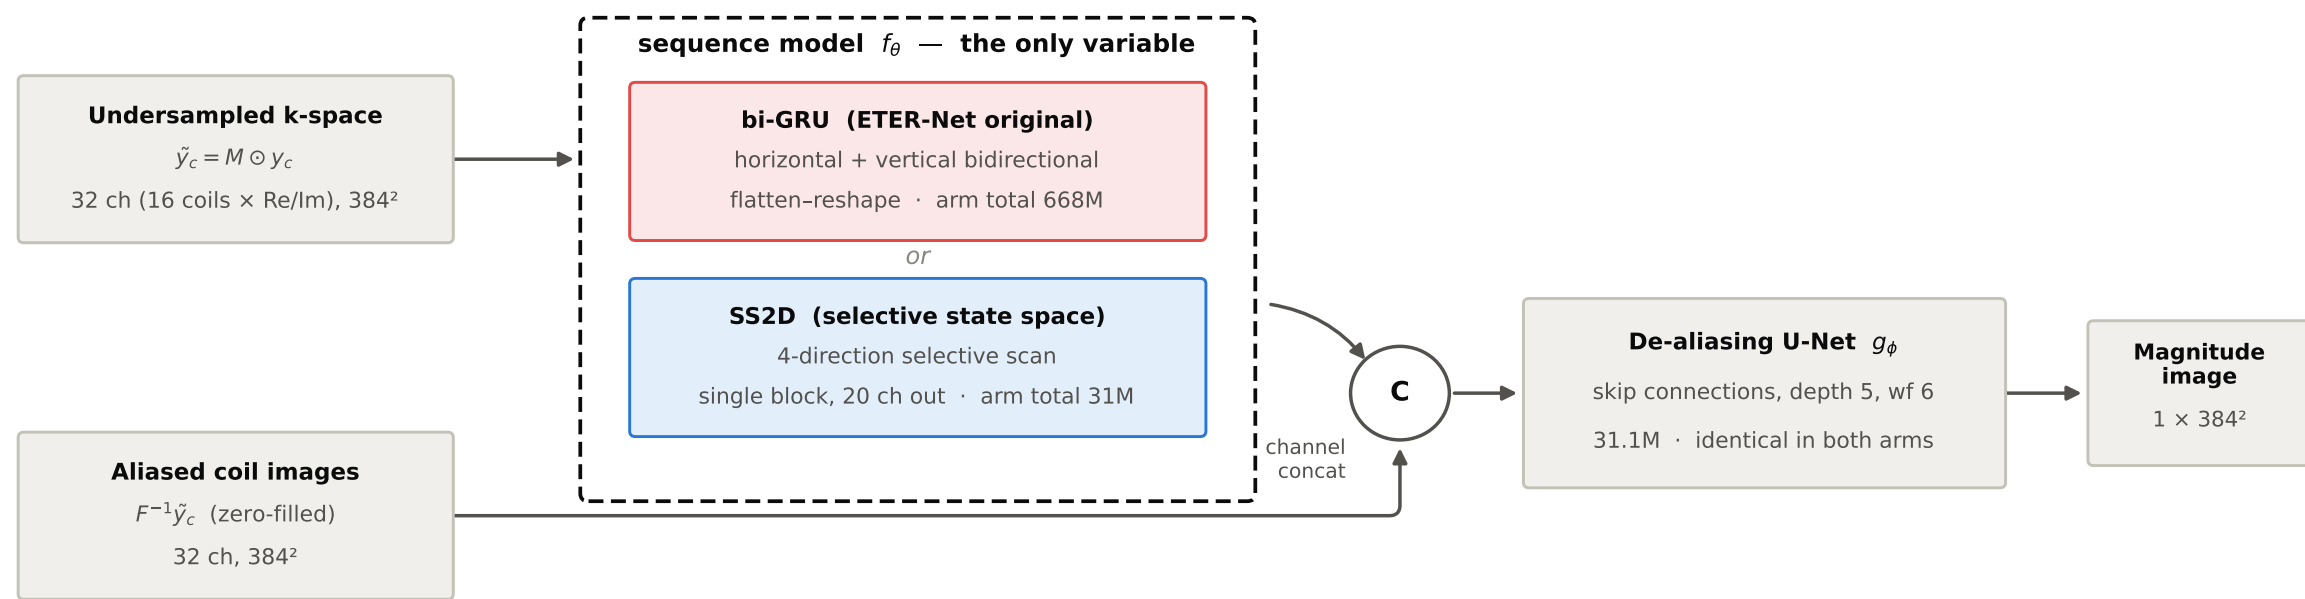

All components except the sequence module are identical across the two arms: data loader, undersampling masks, loss, optimizer, schedule, epochs, and the post-processing U-Net.

(b) Enhanced SS2D — drop-in replacement for the f_θ slot in (a)

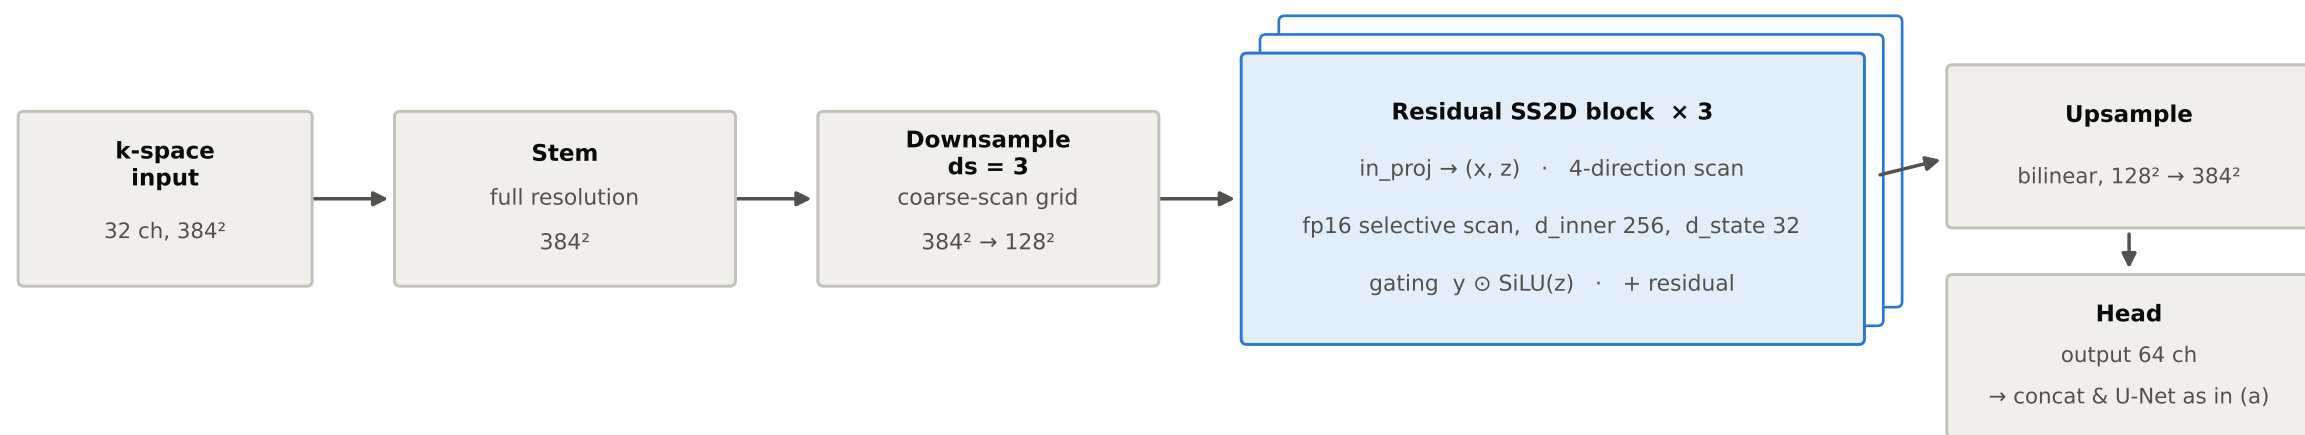

Enhancements over the controlled SS2D: gating restored $\cdot$ 3 residual blocks $\cdot$ bottleneck lifted (20 $\rightarrow$ 64 ch, d_{inner} 128 $\rightarrow$ 256, d_{state} 16 $\rightarrow$ 32) $\cdot$ SSM stack 3.1M, arm total 34.2M. fp16 + coarse scan keep the per-epoch time comparable to the controlled arm (2.84 vs 3.07 h/epoch; different runtime environments) — enabling 80 instead of 50 epochs.