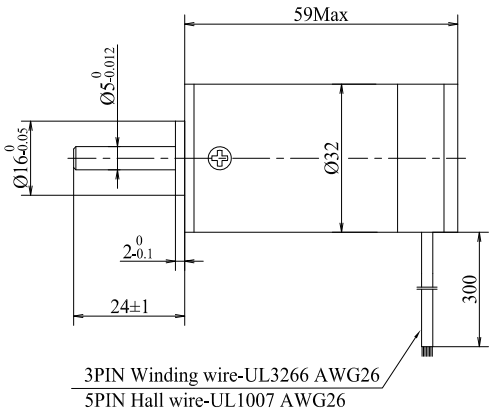



电气特性参数/ELECTRICAL PARAMETER

相数/Number of Phase	3
极数/Number of Poles	8
额定电压/Rated Voltage	12V DC
额定转速/Rated Speed	3000rpm
额定扭矩/Rated Torque	0.03N.m
额定功率/Rated Power	10W
额定电流/Rated Current	1.5A
峰值电流/Peak Current	3A
峰值扭矩/Peak Torque	0.06N.m
电阻/Resistance	TBD Ω
电感/Inductance	TBD mH
转矩常数/Torque Constant	0.023N.m/A
反电势常数/EMF Constant	1.39V/krpm
转子惯量/Rotor Inertia	0.012 Kg.cm^2
重量/Weight	0.2 Kg
绝缘等级/Insulation Class	Class B
介电强度/Dielectric Strength	500VAC for one minute
绝缘电阻/Insulation Resistance	100MΩ Min.,500VAC

转速-转矩特性

Torque--speed characteristic

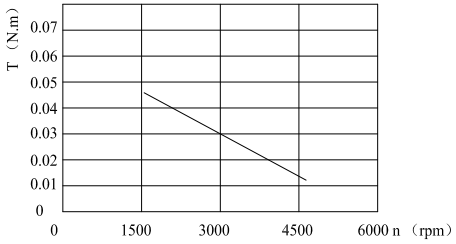

绕组接线图

Winding Diagram



霍尔传感器接线图

Hall Sensor Wiring Diagram

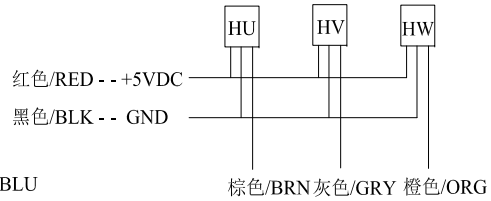

CONFIRMED&ACCEPTED BY CUSTOMER(客户确认&接受)						型号/MODEL		
COMPANY CHOP&SIGNATURE (盖章&签名)						PBLR32HES-121030		
一般公差 TOLERANCE ±0.5/±3°	版本REV.	DATE 日期	变 更 内 容 REVISION RECORD		设计 BY	备 注 NOTE	REV.	A
设 计/DESIGNED	王子祥/20241025	比 例 SCALE	1:1	砺锋机电	BRUSHLESS DC MOTOR		第一角画法 FIRST ANGLE METHOD	
审 核/CHECKED	杨飞锋/20241025							
批 准/APPROVE	娄德成/20241025	单位 UNIT	mm	PrimoPal Precision Motor Co.,Ltd			SHEET页	