MJTP SERIES 6MM & 4MM SMD TACT SWITCHES

FEATURES

- Numerous single pole-single throw momentary configurations.
- Excellent tactile feed-back (Snap dome).
- Ultra-compact size.
- Long operating life for high reliability.
 - Molded-in terminals minimize wicking of flux or solder.

MATERIALS Cas

Gold plating available on contacts & terminals - consult factory.

Case: High temperature 4/6 nylon. Actuator: High temperature 4/6 nylon.

Cover/Bracket: PET film, tin plated brass or stainless steel.

Terminals: Silver plated brass.

Shorting Contact: Phosphor bronze or stainless steel with silver plating.

L.E.D. rating: Forward voltage- 2.1 V (3.0 V Max.). Cont. fwd. current 20mA max.@ 25°C.

GENERAL SPECIFICATIONS

ELECTRICALS

Contact rating: 50 mA @ 12 VDC

Insulation resistance: 100 megohms min. (100 VDC)

Dielectric withstanding voltage: 250 VAC for 1 minute

Contact resistance: 100 milliohms max. @ 5 VDC, 10 mA

Electrical life: 100,000 cycles min. (1,000,000 cycles available - consult factory)

Contact bounce: less than 10 msec.

MECHANICALS, THERMALS, ENVIRONMENTALS

Plunger travel: .010"+ .008", - .004" (0,25 +0,2, -0,1 mm)

Actuation force: 160 grams ±30 grams

Operating temperature range: -20°C to +70°C

Storage temperature range: -30°C to +80°C for 96 hours

Shock resistance: 30G per method 213, MIL-STD-202 Vibration resistance: passes method 201, MIL-STD-202


SOLDERING (note - non-washable except for models indicated as 'process compatible').


IR reflow soldering: 240°C max. for 20 seconds max. Wave soldering: 255°C max. for 5 seconds max.

Hand soldering: 320°C max. for 3.5 seconds max. (40 watt iron max.)

US # MJTP1106S








US Model	Dim.
No.	L (in./mm)
MJTP1106S	.169 (4,3)
MJTP1106SA	.197 (5,0)

Bulk packaged.

US#MJTP1106SATR

Same as above, except supplied on tape and reel as shown.

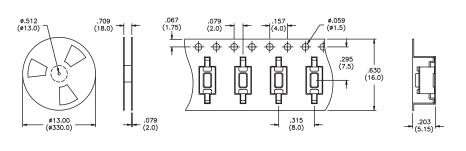



Tape & reel packaging - quantity 1800 per reel.



US # MJTP1122 Grounding .315 (8.0) .244 (6.2) Bulk packaged. .028 (0.7) SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. **US # MJTP1122A** Grounding ø.118 (3.0) Bulk packaged. .394 (10.0) (6.2) **US # MJTP1122B** EU#PHAP3374 .244 (6.2) Bulk packaged. .315 (8.0) .244 (6.2) **US # MJTP1122TR**, **MJTP1122BTR &** MJTP3374TR ø.512 (ø13.0) EU#PHAP3374R Same as above, except supplied on tape & reel .630 (16.0) as shown. Note -MJTP1122A ø13.00 (ø330.0) .472 (12.0) not available on tape & reel. Tape & reel packaging - quantity 1500 per reel.








Bulk packaged.

New!

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

US # MJTP1138 EU # PHAP3368





US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1138	.170 (4,3)	PHAP3368
MJTP1138A	.197 (5,0)	PHAP3368A
MJTP1138B	.374 (9,5)	PHAP3368B
MJTP1138C	.315 (8,0)	PHAP3368C
MJTP1138D	.512 (13,0)	PHAP3368D
MJTP1138E	.287 (7,3)	PHAP3368E
MJTP1138F	.335 (8,5)	PHAP3368F
MJTP1138G	.275 (7,0)	N/A


Bulk packaged. Tubes available for some models consult factory.



US # MJTP1138TR & MJTP1138ATR

Same as above except supplied on tape & reel as shown.


Tape & reel:
MJTP1138ATR = 500 pcs.
MJTP1138BTR = 500 pcs
MJTP1138CTR = 700 pcs
MJTP1138ETR = 750 pcs
MJTP1138FTR = 700 pcs
MJTP1138GTR = 750 pcs

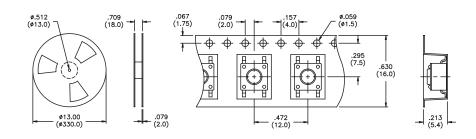


MJTP1138TR & MJTP1138ATR: Tape & reel packaging - quantity 1200 pcs

US # MJTP1140 EU # PHAP3390 4mm x 4mm









Bulk packaged.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

US # MJTP1140A EU # PHAP3391








Bulk packaged.

US # MJTP1140TR & MJTP1140ATR EU # PHAP3390R & PHAP3391R


Same as above, except supplied on tape & reel as shown.

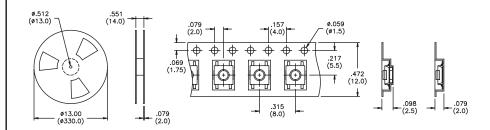


Tape & reel packaging - quantity 3400 per reel.

US # MJTP1162 EU # PHAP3371







US Model	Dim.	EU Model
No.	L (in./mm)	No.
MJTP1162	.102 (2,6)	PHAP3371
MJTP1162A	.134 (3,4)	PHAP3371A


Bulk packaged.



on tape & reel as shown.










Tape & reel packaging - quantity 1600 per reel.


US # MJTPSJW66N


Process compatible



New!









US # MJTPSJW69N

Process compatible




New!






Bulk packaged.




US # MJTPSMW

Process compatible








US Model	Dim.
No.	L (in./mm)
MJTPSMW	.122 (3,1)
MJTPSMWA	.091 (2,3)
MJTPSMWB	.146 (3,8)

Bulk packaged.



US#MJTPSMWTR& MJTPSMWATR, **MJTPSMWBTR**


Same as above except supplied on tape & reel as shown.

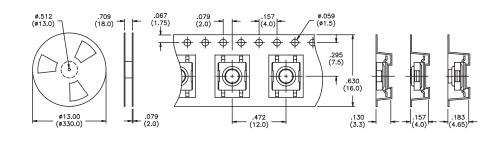

Tape & reel packaging - quantity 'MWTR' & 'MWATR' 2000 per reel, 'MWBTR' 1900 per reel.

SCHEMATICS







MJTP1106





PRINTED CIRCUIT BOARD LAYOUTS

Layout tolerances; Linear: ± .004" (± 0,1MM) Holes: ± .002" (± 0,05MM) Pads: ± .008" (± 0,2MM)










SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MJTP1106S


MJTP1122


MJTP1122A

MJTP1122B










MJTP1137

MJTP1137E

MJTP1138

MJTP1140

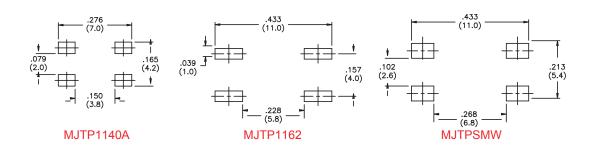



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Apem:

<u>MJTPSMW MJTP1138TR MJTPSJW66N MJTPSJW69N MJTP1106S MJTP1138 MJTP1106SATR MJTP1122</u>

<u>MJTP1122B MJTP1122BTR MJTP1122TR MJTP1125B MJTP1138ATR MJTP1140A MJTP1140ATR MJTP1140TR MJTP1162 MJTP1162ATR MJTP1162TR MJTPSMWBTR</u>