

1 Agroforestry SmartAgroforest: Poplar biomass modelling

2 Thomas Kirschstein^{1,1,1,*}

3 Abstract

Short-rotation agroforestry systems are increasingly promoted as a low-carbon feedstock option for bio-based value chains, but their economic viability depends on coordinated decisions on stand establishment, multi-cycle harvesting, and product cascading in spatially distributed supply chains. This paper develops a mixed-integer linear programming (MILP) model for the integrated design and operation of an agroforestry biomass supply chain with explicit age-lag constraints that link consecutive harvests at each site. The formulation couples allometric yield functions for different biomass types with a multi-product, multi-period network design model including storage, processing, and product quality cascades. The model is applied to a stylised case study of Central European poplar-based alley-cropping systems to explore trade-offs between harvest rotation length, product portfolios, and infrastructure configuration. We outline a computational experimentation plan to test the impact of allometric parameter uncertainty, price scenarios, and policy incentives on the optimal deployment of agroforestry systems in cleaner bioeconomy pathways.

4 *Keywords:* Agroforestry, Short-rotation coppice, Biomass supply chain, Product
5 cascading

6 ## [1] "age" "scenario" "Merch. stem" "Merch. branch"
7 ## [5] "Residue"

8 1. Introduction

9 Agroforestry systems that integrate trees with agricultural crops (silvoarable systems)
10 are increasingly recognised as a promising land-use option to reconcile climate mitigation,

*Corresponding author
Email address: thomas.kirschstein@ikts.fraunhofer.de (Thomas Kirschstein)
Preprint submitted to Journal Name

11 biodiversity conservation, and rural income generation on the same hectare of land (Toens-
12 meier, 2017). Temperate agroforestry systems (AFS) based on fast-growing species such
13 as poplar, willow, alder, and black locust can deliver substantial biomass yields while im-
14 proving soil quality and providing multiple ecosystem services compared to conventional
15 monocultures (Huber et al., 2018). Biomass produced in AFS is considered as a sustain-
16 able feedstock and can be used either energetically, chemically or materially (e.g. in the
17 building sector). The latter two options are generally preferred over the energetic usage
18 from a cleaner production perspective as biogenic carbon is stored in products during
19 their life span which contributes to climate change mitigation.

20 Despite substantial research on ecological advantages and pioneering initiatives to
21 establish AFS in practice, the share of AFS in agricultural production systems is still
22 small. E.g., in Germany about 1200 hectares of silvoarable AFS are established in 2025,
23 which accounts for about 0.02% of total agricultural land use (?). One of the core chal-
24 lenges in establishing AFS systems at large scale in practice is a lack of opportunities to
25 generate substantial revenues from woody biomasses of AFS. On the other hand, the rise
26 of bioeconomy creates substantial demands for woody biomass and requires a reliable
27 and cost-efficient feedstock supply. As woody biomasses are bulky feedstocks with low
28 energy density, the design of cost-efficient supply chains is crucial to ensure the economic
29 viability of AFS-based value chains. This requires coordinated decisions on stand estab-
30 lishment, multi-cycle harvesting, and product cascading in spatially distributed supply
31 chains, which can be supported by integrated optimisation models that link stand-level
32 growth dynamics to regional supply chain design.

33 In the last two decades, a large body of research has analysed biomass supply chains
34 for bioenergy and biorefineries using mathematical programming models, often in the
35 form of mixed-integer linear programming (MILP) (Zahraee et al., 2020; Sharma et al.,
36 2013). These models typically optimise network configuration, feedstock sourcing, and
37 logistics under cost or profit objectives. They often treat biomass availability as an exoge-
38 nous input or rely on simplified agricultural production decisions. Moreover, downstream
39 processing of biomasses is concentrated on one particular value chain e.g. bioenergy plants
40 consuming all produced biomasses. Recent work has started to integrate operational de-
41 tails such as various biomass types, biomass growth models and regeneration processes

42 in multi-period supply chain models.

43 The present paper contributes to this literature in three ways. First, we propose
44 a novel MILP formulation for AFS-based biomass supply chain design that explicitly
45 links establishment decisions and consecutive harvest decisions, ensuring that harvesting
46 decisions at each site are consistent with minimum and maximum rotation ages. Second,
47 we embed allometric yield functions for different biomass types generating age-specific
48 yields for different woody biomass types (like stems, branches, or leaves and twigs). Third,
49 these different woody biomass types can be processed in specific downstream industries,
50 like chemical or paper industry as well as energy sector. The model aims to provide
51 strategic decision support for establishing regional AFS-based bioeconomy ecosystems
52 connecting multiple industries and product markets.

53 The remainder of the paper is structured as follows. Section 2 reviews the relevant lit-
54 erature on agroforestry biomass systems, allometric biomass modelling, and biomass sup-
55 ply chain optimisation. Section 3 summarises the MILP formulation for the agroforestry
56 supply chain with age-lag constraints. Section ?? outlines the planned computational
57 experiments for the case study and discusses expected insights for cleaner production
58 strategies.

59 **2. Literature review**

60 Agroforestry biomass systems, stand-level growth models, and biomass supply chain
61 optimisation have each been studied extensively, but they are rarely combined in an inte-
62 grated framework that links age-dependent stand dynamics to regional product-cascading
63 value chains (Zahraee et al., 2020; Sharma et al., 2013; Espinoza et al., 2017). This sec-
64 tion reviews (i) agroforestry systems with emphasis on system types, economics, and the
65 cascading use of biomass as the primary revenue driver; (ii) biomass growth models at
66 tree and stand level with explicit attention to the allometric–diameter–stand–biomass
67 pathway; and (iii) biomass supply chain design using mathematical programming. The
68 section concludes by identifying the modelling gap addressed in this paper.

69 *2.1. Agroforestry systems*

70 Agroforestry deliberately integrates woody perennials with crops and/or livestock on
71 the same management unit, with the aim of enhancing productivity, profitability, and

environmental performance (Nair, 1993; Toensmeier, 2017). In the temperate zone, three distinct system types can be distinguished based on the spatial arrangement of trees and the rotation length at which woody biomass is harvested.

Short-rotation coppice (SRC) is defined as a monoculture plantation of fast-growing woody species covering the entire management unit, with planting densities of 8,000–20,000 cuttings $\cdot\text{ha}^{-1}$. After each harvest the root system regenerates without replanting. Rotation cycles are typically 3–7~years and total stand lifetime is 20–25~years (Trnka et al., 2008; Faasch and Patenaude, 2012). SRCs are no AFSs in the narrow sense, but it is helpful to benchmark biomass production.

Short-rotation agroforestry systems (SRAFS) integrate SRC-type tree strips (typically 1–4 rows of the same fast-growing species like poplar or willow) into an otherwise arable field in an alley-cropping arrangement. Crop production continues in the inter-row strips (Huber et al., 2018; Graves et al., 2007). Thus, tree strips typically cover 10–30% of the total parcel area. Rotation lengths and total stand lifetime in SRAFS are comparable to SRCs. In SRAFS all trees are effectively edge trees, exposed to higher light and water availability than interior SRC trees. This boundary effect raises individual-tree biomass accumulation but also intensifies competition with adjacent crop rows (Huber et al., 2018).

Long-rotation agroforestry systems (LRAFS) use the same alley-cropping spatial structure as SRAFS but with rotation cycles of 12–15~years or longer (Graves et al., 2007; Nair, 1993). At this rotation length, individual trees develop substantial stem diameters and the proportion of high-value timber increases markedly, enabling premium material uses (veneer, sawlogs, engineered wood products) that are inaccessible in short-rotation systems. Therefore, often timber-quality tree species (such as walnut, cherry, oak, or high-grade poplar clones) are planted.

SRAFS and LRAFS are not clearly differentiated in practice. First, a clear cut-off age is hard to define and, more importantly, the intended use of AFS biomass is not always clear and can also change over time. Nonetheless, when establishing AFS, the structure of AFS and its intended use after harvest drives planting decisions and, subsequently, economic viability. Thus, in the present paper SRAFS and LRAFS are not considered as separate AFS systems, but the interplay of intended use, establishment, and harvesting

103 decisions is analysed.

104 *2.1.1. Economic rationale of landowners*

105 The decision of a landowner to establish an AFS involves weighing substantial up-front
106 costs and long-term opportunity costs against a diversified revenue stream. On the **cost**
107 **side**, establishment requires site preparation, planting material, and planting labour,
108 typically amounting to 1,500–3,500 €/ha for SRC or SRAFS (Faasch and Patenaude,
109 2012; Testa et al., 2014). Recurrent harvest and refitting costs (machine hire, chipping,
110 transport to roadside) add approximately 200–400 €/ha per rotation depending on stand
111 density and equipment availability (Testa et al., 2014; Spinelli et al., 2009). During
112 the rotation, maintenance costs of AFS arise on a yearly basis. Next to expenses for
113 establishment, maintenance and harvesting, opportunity costs arise as no revenues from
114 crops are generated on tree strips. In regions with fertile soils and high cereal prices,
115 yearly crop revenues may sum up to 400–600 €/ha (Faasch and Patenaude, 2012; Graves
116 et al., 2007). Thus, opportunity costs are often the dominant cost driver in SRAFS
117 profitability analyses.

118 On the **benefit side**, the primary revenue of AFS is the sale of harvested woody
119 biomass, whose magnitude depends critically on rotation length, species, and site pro-
120 ductivity. For poplar-based SRAFS in Central Europe, typical yields range from 10
121 to 25 t of dry matter biomass per ha for typical rotation lengths (Huber et al., 2018;
122 Niemczyk and Thomas, 2021). Additionally, positive crop-yield effects in the inter-row
123 strips of SRAFS and LRAFS may result. Tree rows act as windbreaks, reducing soil
124 erosion and evapotranspiration; they provide partial shading that moderates heat stress
125 during drought years; and their root systems may improve water retention in the top-
126 soil (Graves et al., 2007; Grünewald et al., 2007). Empirical measurements in Central
127 European alley-cropping trials indicate that these microclimate effects can increase ce-
128 real yields in adjacent strips by 5–15% relative to open-field controls, partially or fully
129 compensating the loss of arable area occupied by the tree strips (Graves et al., 2007).
130 Beyond direct yield effects, AFS deliver broader ecosystem services (like soil organic
131 matter accumulation, carbon sequestration, biodiversity enhancement) that may lead to
132 agri-environment subsidies and carbon credits (Toensmeier, 2017; Faasch and Patenaude,
133 2012).

Nonetheless, economic attractiveness of AFS depends primarily on revenues of AFS biomass. Thereby, revenues are different for the types of biomass and in which value chain it is used. Often AFS biomasses are used energetically, i.e. for heat and power generation, or anaerobic digestion, which typically creates low prices per tonne of biomass. Alternatively, woody parts of the biomass (i.e., the stem and large branches) can also be used as pulp and paper grade material as well as feedstock for chemical industry or as timber achieving higher prices (Lamers et al., 2011; De Meyer et al., 2014). Thus, fostering AFS establishment by maximizing economic returns from AFS biomass requires a strategic approach to product cascading that allocates different biomass fractions to the highest-value applications, while ensuring that the rotation length is aligned with the growth dynamics of the stand and the market demand for different biomass types (Lamers et al., 2011).

Thus, for making educated decisions on AFS establishment and harvesting, the expected biomass quantities at harvest for stem, branches, and residues need to be estimated. Thereby, the shares of the biomass types change with stand age. E.g.~the share of stem weight rises from roughly 55% at age 4 to over 75% at age 10 (Huber et al., 2018; Testa et al., 2014). Therefore, in Section 2.2 growth modelling approaches are reviewed that capture the age-dependent growth dynamics of different biomass types in AFS.

2.2. Biomass growth models

Reliable estimation of stand-level biomass quantities and their age-dependent composition is a necessary prerequisite for any strategic analysis of AFS-based supply chains. Individual-tree biomass is commonly approximated by species-specific allometric power laws relating shoot dry matter to stem base diameter, and these relationships have been calibrated for Central European poplar clones under SRC and SRAFS conditions (Huber et al., 2016, 2018). For supply chain planning, however, the relevant quantity is **stand-level biomass per hectare** over a multi-decade rotation horizon, which requires a temporal growth model that captures the characteristic sigmoidal accumulation trajectory of woody biomass.

Table 1: Notation for the biomass growth and harvest yield models.

Symbol	Description
$M^{sl}(t)$	Total above- and belowground dry biomass per ha of AFS (t DM ha ⁻¹) at stand age t
$A(N)$	Stand-level Gompertz asymptote (t DM ha ⁻¹); density- and site-dependent
k	Gompertz growth-rate coefficient (yr ⁻¹)
t_0	Inflection age of stand biomass accumulation (yr)
N	Stand density (trees ha ⁻¹)
C_{site}	Site-quality constant (kg ha ^{β-1}); conservative: 4 475, good site: 6 471
β	Competition-density exponent; fitted $\hat{\beta} = 0.380$
ϕ_{ag}	Aboveground fraction of total stand biomass; $\phi_{\text{ag}} = 0.89$
$M^{ag}(t)$	Aboveground dry biomass per ha (t DM ha ⁻¹) at age t
$f_p(t)$	asymptotic fraction of AGB attributed to compartment $p \in \{s, b, r\}$ at age t
α_p, δ_p	Intercept and slope of the linear fraction model for compartment p
$q_p(t)$	Merchantable fraction of compartment p biomass at age t (logistic)
r_p	Logistic growth rate for merchantability of compartment p
$t_{50,p}$	Age at which 50% of compartment p biomass is merchantable (yr)
$Y_p(t)$	Merchantable dry biomass of compartment p per ha at harvest age t (t DM ha ⁻¹)
ω	Moisture content at felling (mass fraction); $\omega = 0.55$

162 2.2.1. Stand-level growth model

163 Stand-level aboveground and belowground dry biomass per hectare, $M^{sl}(t)$, accumu-
164 lates in a right-skewed sigmoidal pattern with a relatively early inflection point, driven
165 by rapid juvenile shoot growth followed by self-thinning and competitive deceleration
166 as canopy closure intensifies (Niemczyk and Thomas, 2021; Testa et al., 2014). This
167 trajectory is described by a Gompertz model:

$$M^{sl}(t) = A(N) \cdot \exp(-\exp(-k(t - t_0))), \quad (1)$$

168 where t_0 is the age of maximum instantaneous biomass increment and k determines how
169 quickly the stand approaches its site-specific asymptote $A(N)$. For Central European
170 poplar under medium-rotation AFS management (10–20 yr), calibration against empiri-
171 cal data from Huber et al. (2018), Niemczyk and Thomas (2021), and Jha (2018) yields
172 $k = 0.194, \text{yr}^{-1}$ and $t_0 = 9.7, \text{yr}$ for a conservative site, and $k = 0.173, \text{yr}^{-1}$, $t_0 = 10.1, \text{yr}$
173 for a high-productivity site, placing the growth peak close to the biologically optimal

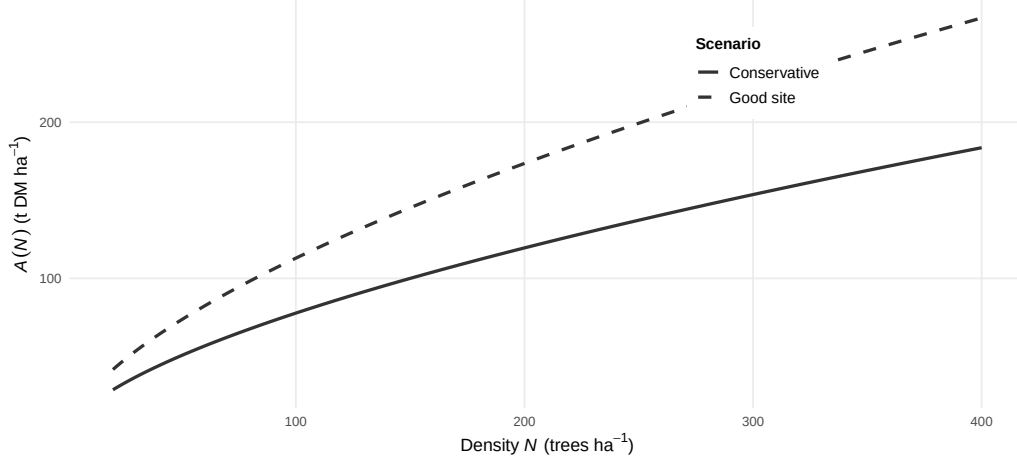


Figure 1: Stand-level Gompertz asymptote function $A(N)$ of planting density for the conservative (solid) and good-site (dashed) scenarios.

rotation age identified by Niemczyk and Thomas (2021).

The asymptote $A(N)$ is not a fixed species constant but depends explicitly on planting density through a competition-density power law (?):

$$A(N) = \frac{C_{\text{site}} \cdot N^{1-\beta}}{1000}, \quad (2)$$

where C_{site} encodes site quality and β is the competition exponent. Equivalently, the per-tree asymptote $A_{\text{tree}}(N) = A(N) \cdot 1000/N = C_{\text{site}} \cdot N^{-\beta}$ decreases with density as individual trees have access to less growing space. Fitting (2) to two anchor points — a conservative AFS calibration at 113 trees,ha⁻¹ (central EU; $A = 84, \text{t,DM,ha}^{-1}$) and SRC data at 1,333 trees,ha⁻¹ from Niemczyk and Thomas (2021) — yields $\hat{\beta} = 0.380$, consistent with the 0.3–0.5 range reported for managed hardwood plantations (?). Two site-quality scenarios are used throughout: a **conservative scenario** ($C_{\text{site}} = 4\,475$, 113 trees,ha⁻¹, $A = 84, \text{t,DM,ha}^{-1}$) representative of sandy loam soils in northern Central Europe, and a **good-site scenario** ($C_{\text{site}} = 6\,471$, 139 trees,ha⁻¹, $A = 138, \text{t,DM,ha}^{-1}$) representative of deep loamy soils in river valleys.

Within each compartment, only the biomass fraction whose element diameter exceeds a minimum threshold qualifies as merchantable product for industrial use. This fraction rises continuously with stand age as stems thicken and branches coarsen, and is modelled

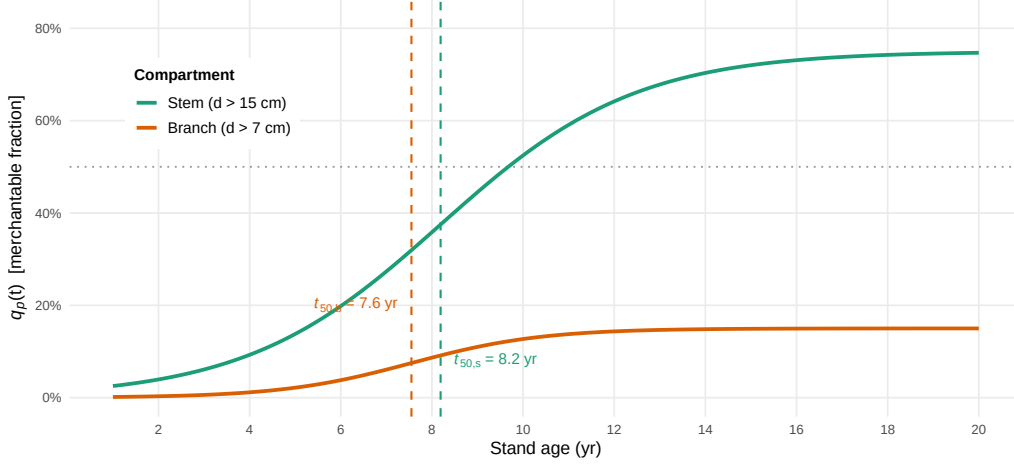


Figure 2: Logistic diameter-class merchantability functions $q_p(t)$ for stem ($d > 15$ cm, green) and branches ($d > 7$ cm, orange); the 50% threshold ages t_{50} are indicated by dashed vertical lines.

by a logistic function:

$$q_p(t) = \frac{f_p}{1 + \exp(-r_p(t - t_{50,p}))}, \quad (3)$$

where $t_{50,p}$ is the age at which 50% of compartment p biomass surpasses the diameter threshold. f_p denotes the asymptotic share of component p for mature trees. For the merchantable stem (threshold $d > 15$ cm), calibration to data from Civitarese et al. (2019) and Niemczyk and Thomas (2021) yields $r_{stem} = 0.467, \text{yr}^{-1}$, $t_{50,stem} = 8.19, \text{yr}$, and $f_{stem} = 0.75$. For merchantable branches (threshold $d > 7$ cm at insertion), Civitarese et al. (2019) and Jha (2018) imply $r_{bran} = 0.698, \text{yr}^{-1}$, $t_{50,bran} = 7.55, \text{yr}$, and $f_{bran} = 0.15$.

Combining equations (1)–(3), the merchantable dry biomass yield of compartment p per hectare at harvest age t is:

$$Y_p(t) = q_p(t) \cdot M^{ag}(t), \quad (4)$$

with all non-merchantable fractions aggregated into the residue stream. Fresh-weight yields at felling are obtained from dry matter yields via $Y_p^{fw} = Y_p/(1 - \omega)$, where the moisture content at felling $\omega = 0.55$ is taken from Civitarese et al. (2019). Figure 2 illustrates the shapes of $A(N)$, $f_p(t)$, and $q_p(t)$; Figure 3 shows the resulting stacked AGB component trajectories compared with empirical observations.

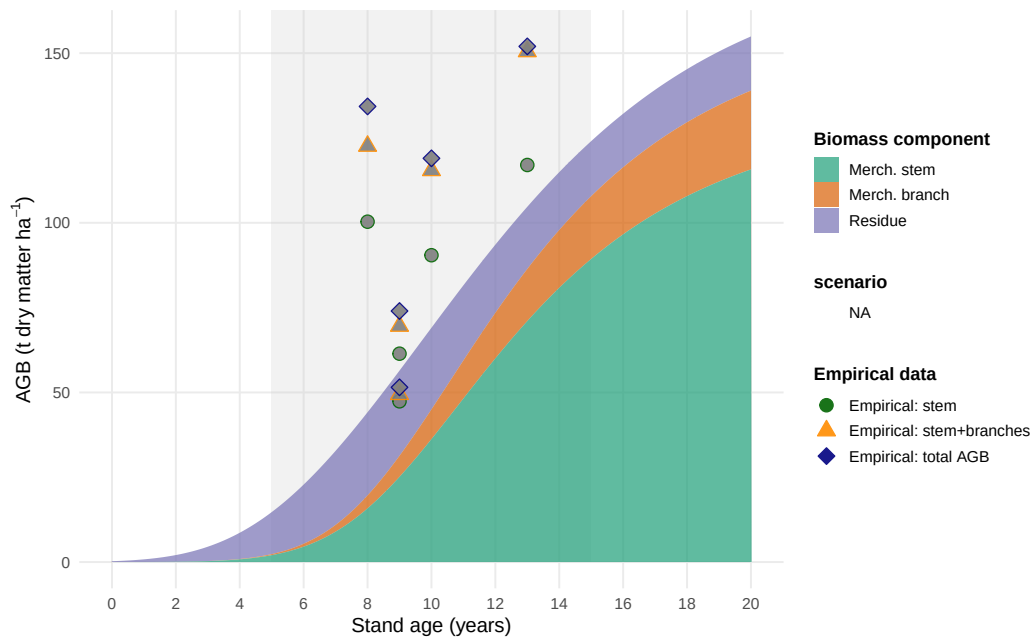


Figure 3: Stand-level aboveground biomass components for poplar under AFS management with $N = 250$ trees ha^{-1} . Empirical AGB observations compiled from Jha (2018), Civitarese et al. (2019), and Niemczyk and Thomas (2021). Grey band: typical medium-rotation harvest window (5–15 years).

205 2.3. Biomass supply chain design

206 The design and planning of biomass supply chains has attracted substantial research
207 attention over the past two decades, driven by the need to ensure cost-efficient and
208 sustainable feedstock provision for bioenergy and biorefinery applications. Several sys-
209 tematic reviews provide comprehensive overviews of this literature. Cambero and Sowlati
210 (2014) survey economic, social, and environmental assessment and optimisation studies
211 for forest biomass supply chains, identifying MILP as the dominant modelling approach
212 and noting a growing trend towards multi-objective formulations integrating life cycle
213 assessment.

214 Yue et al. (2014) review biomass-to-bioenergy and biofuel supply chain models with
215 a focus on multi-scale modelling, uncertainty treatment, and sustainability metrics, and
216 conclude that the coupling of upstream feedstock dynamics with downstream network de-
217 sign remains an underexplored area. Malladi and Sowlati (2018) survey logistics-specific
218 features of biomass supply chain models—seasonal availability, moisture content degra-
219 dation, preprocessing steps—and highlight that most models treat biomass as a homo-
220 geneous commodity, neglecting quality differentiation. Zahraee et al. (2020) provide a
221 recent meta-review of 140+ studies, confirming that cost minimisation is still the domi-
222 nant objective, and that multi-product cascading formulations are rare.

223 The structure of biomass supply chain models typically encompasses three decision
224 layers: (i) strategic network design (facility location, capacity sizing, technology selec-
225 tion), (ii) tactical planning (harvest scheduling, seasonal flows, inventory), and (iii) oper-
226 ational routing. The following paragraphs discuss key individual contributions and their
227 specific methodological advances.

228 Ekşioğlu et al. (2009) develop one of the earliest large-scale MILP models for biomass-
229 to-biorefinery supply chain design, integrating facility location, capacity sizing, and mul-
230 timodal transport for lignocellulosic feedstocks. Their model minimises total system cost
231 and introduces binary facility-opening variables that have since become standard in the
232 field. A key limitation, however, is that biomass supply is treated as an exogenous input,
233 so feedstock availability is not endogenised as a function of land-use or growth decisions.
234 Mansoornejad et al. (2013) extend the strategic design perspective to forest biorefiner-
235 ies by integrating product portfolio design with supply chain configuration in a single

MILP. Their model explicitly accounts for product conversion efficiencies along different processing pathways, enabling joint optimisation of process technology selection and logistics.

De Meyer et al. (2014) introduce the OPTIMASS framework, a generic MILP for biomass-based supply chain optimisation that explicitly models product quality cascades: higher-quality biomass classes can substitute for lower-quality demands downstream, whereas the reverse is infeasible. This cascade hierarchy, formalised through ordered product sets, is particularly relevant for woody biomass where stem, branch, and residue fractions command different market prices. The companion t-OPTIMASS extension (De Meyer et al., 2016) incorporates temporal dynamics by explicitly representing biomass growth and regeneration over multiple periods, enabling simultaneous optimisation of harvest timing and network flows. However, in both OPTIMASS formulations the growth dynamics are represented as exogenous time-series rather than as age-structured stand models, so rotation-length decisions and age-dependent biomass quality are not endogenised. Arabi et al. (2019) demonstrate multi-period MILP extensions for bio-based supply chains with production dynamics, but focus on microalgae rather than woody biomass and do not address product quality cascades.

Sharma et al. (2013) identify supply-side uncertainty (yield variability, seasonal availability, moisture content) as the most critical source of risk in biomass supply chains. In response, a strand of literature has developed stochastic and robust optimisation extensions. Zahraee et al. (2020) document that two-stage stochastic MILP and robust optimisation approaches now account for roughly 30% of the modelling literature, with biomass yield uncertainty and price volatility as the dominant stochastic parameters.

Biomass supply chain research focusing specifically on agroforestry or SRC contexts is comparatively sparse. Espinoza et al. (2017) note that most supply chain models assume continuous feedstock availability and do not represent the periodic harvest cycles characteristic of coppice systems. Lamers et al. (2011) analyse feedstock design principles for lignocellulosic supply chains and argue that the allocation of different biomass fractions to valorisation pathways—product cascading—is a key lever for economic viability, yet is rarely optimised jointly with network design decisions. The model developed in Section 3 of this paper directly addresses this gap by endogenising stand age dynamics through

binary age-lag variables and coupling component-specific yield coefficients with a product quality cascade.

Table 2 summarises the key modelling features of the reviewed contributions.

Table 2: Key modelling features of selected biomass supply chain design studies.

Study	Objective	Multi-product	Quality cascade	Age dynamics	Uncertainty	Level
Eksioglu et al. (2009)	Cost min.	—	—	—	—	Strategic
Sharma & Taaffe (2013)	Cost min.	Partial	—	—	—	Strategic/Tactical
Mansoornejad et al. (2013)	Profit max.	✓	—	—	—	Strategic
Cambero & Sowlati (2014)	Cost/GHG/jobs	—	—	—	Stochastic	Strategic
Yue et al. (2014)	Cost/GHG	✓	—	—	—	Multi-scale
De Meyer et al. (2015)	Cost min.	✓	✓	Exogenous	—	Strategic/Tactical
De Meyer et al. (2016)	Cost min.	✓	✓	Exogenous TS	—	Multi-period
Lamers et al. (2015)	Cost/quality	✓	Partial	—	Scenario	Strategic
Espinoza et al. (2017)	Sustainability	✓	—	—	Scenario	Strategic
Malladi & Sowlati (2018)	Cost min.	Partial	—	—	—	Tactical/Oper.
Arabi et al. (2019)	Profit max.	✓	—	Exogenous	—	Multi-period
Zahraee et al. (2020)	Multi-obj.	✓	—	—	Stochastic	Strategic/Tactical
This paper	NPV max.	✓	✓	Endogenous	Scenario	Strategic/Multi-period

3. MILP Model for Agroforestry Supply Chain Design

Building on the biomass growth models introduced in Section 2.2 and the supply chain design literature reviewed in Section 2.3, this section describes the AFS supply chain design problem (AFS-SCD), a mixed-integer linear programming (MILP) model for the integrated design and operation of an agroforestry biomass supply chain. The model endogenises stand age dynamics through binary age-lag variables, couples the component-specific yield coefficients η_{pa} derived from the Gompertz growth models (??)–(??) with supply chain flow variables, and assigns AFS biomass types (i.e., stem, branch, and residue fractions) to potential consumers in chemical, pulp and paper as well as

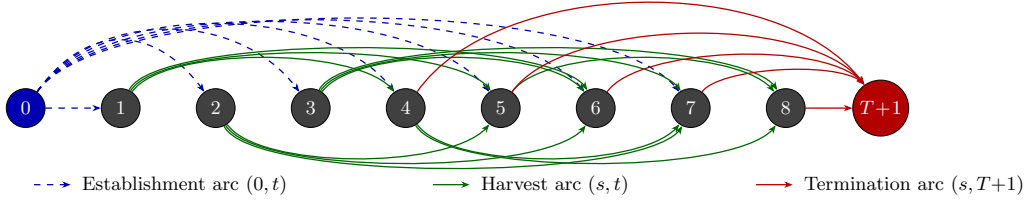


Figure 4: Network structure of set $\mathcal{S}$ for $T = 8$, $A_{\min} = 3$, $A_{\max} = 5$. Dashed blue arcs: establishment arcs $(0, t)$, $t \in \{1, \dots, T-1\}$. Solid green arcs above: harvest arcs (s, t) with odd s ; below: harvest arcs with even s . Solid red arcs: termination arcs $(s, T+1)$, $s \in \{A_{\min} + 1, \dots, T\}$.

energy industry.

3.1. Sets, Indices, and Time Structure

The model considers a set of agroforestry sites $\mathcal{I}$, storage/pre-treatment facilities $\mathcal{J}$, consumer sites $\mathcal{K}$, and biomass types $\mathcal{P} = \{\text{stem}, \text{branches}, \text{residues}\}$, whose growth models are outlined above in (??)–(??). Time is discretised into annual periods $t \in \mathcal{T} = \{1, \dots, T_{\max}\}$. To model flexible harvest timing according to typical rotation structures of SRAFS and LRAFS, $A^{\min}$ and $A^{\max}$ define minimum and maximum stand ages. Thus, harvest are possible in periods $\mathcal{T}^{\text{harv}} = \{A^{\min} + 1, \dots, T_{\max}\}$. To consistently model establishment and consecutive harvest decisions, the following arc sets are defined: $\mathcal{S}^{\text{est}}$ defines potential establishments of AFS. If an AFS is established in period $t \in \mathcal{T}$, arc $(0, t)$ is selected. Harvest set $\mathcal{S}^{\text{harv}}$ summarizes all potential consecutive harvest periods within the age-lag bounds $A^{\min}$ and $A^{\max}$. I.e., if an AFS is established or harvested in period s and next harvest is in period t , arc (s, t) is selected. Finally, there is no subsequent harvest after period t , the AFS is terminated by selecting arc $(t, T_{\max} + 1)$. Termination arcs are summarized in set $\mathcal{S}^{\text{term}}$. All arc sets are formally defined as follows:

$$\begin{aligned}\mathcal{S}^{\text{est}} &= \{(0, t) \mid t \in \{1, \dots, T_{\max} - A^{\min}\}\}, \\ \mathcal{S}^{\text{harv}} &= \{(s, t) \mid s, t \in \mathcal{T} \wedge t - s \in \{A^{\min}, \dots, A^{\max}\}\}, \\ \mathcal{S}^{\text{term}} &= \{(s, T_{\max} + 1) \mid s \in \{A^{\min} + 1, \dots, T_{\max}\}\}, \\ \mathcal{S} &= \mathcal{S}^{\text{est}} \cup \mathcal{S}^{\text{harv}} \cup \mathcal{S}^{\text{term}}.\end{aligned}$$

Figure 4 illustrates this network structure of all arc sets for $T = 8$, $A^{\min} = 3$, $A^{\max} = 5$.




Figure 5: Example of a feasible path through the network for $T = 8, A_{\min} = 3, A_{\max} = 5$: establishment in period 1, harvests in periods 5 and 8, termination at $T + 1$.

3.2. Decision Variables

Binary variables z_{ist} indicate whether an arc from set $(s, t) \in \mathcal{S}$ is selected for site i , indicating establishment, (consecutive) harvest, or termination. Taken together across all arcs, these variables trace a path of consecutive harvest cycles at each site over the planning horizon. Figure 5 illustrates a feasible path corresponding to the establishment of an AFS in period 1 and harvests in periods 5 and 8, whereby the harvest in $t = 8$ is final (and AFS is terminated, thus).

When an AFS is harvested in period t , continuous variables $Y_{ipt} \geq 0$ represent the harvest quantity (t) of product p at site i . Flow variables X_{ijpt} and $X_{jkpp't}$ represent transport of products from AFS sites to storage/pre-treatment facilities and from there to consumers, respectively, while S_{jpt} captures end-of-period inventory at facility j .

Table 3 summarises all sets, decision variables, and parameters used in the MILP formulation. Symbols shared with the growth model of Section 2.2 — in particular the yield coefficients η_{pa} , which are derived from the component-specific Gompertz functions (??)–(??) and the stand biomass model (??) — are listed in Table ?? in Section 2.2.

3.3. Objective Function

As discussed in Section 2.1, the economic attractiveness of AFS supply chains must be assessed from a global perspective taking into account all processes, activities, and participants involved in finally serving customer markets with bio-based feedstocks. Therefore, revenues for the different biomass fractions and must be weighed against costs occurring at all value-adding stages of the supply chains. To be precise, revenues created by selling AFS-based feedstocks to different industrial consumers are counterweighted by establishment, opportunity, harvest, transport, and storage costs of landowners, agricultural firms as well as biomass logistics companies. The model therefore maximises total contribution

margin of all participants in the AFS supply chain over the planning horizon as follows:

$$\begin{aligned}
\max Z = & \sum_{k \in \mathcal{K}, p \in \mathcal{P}} R_{kp} \cdot \sum_{j \in \mathcal{J}, (p', p) \in \mathcal{Q}, t \in \mathcal{T}} X_{jkp'pt} \\
& - \sum_{i \in \mathcal{I}} c_i^{est} \cdot AREA_i \cdot \sum_{(0, t) \in \mathcal{S}^{est}} z_{i0t} \\
& - \sum_{i \in \mathcal{I}} (c_i^{main} + c_i^{opp}) \cdot (t - s) \cdot AREA_i \cdot \sum_{(s, t) \in \mathcal{S}^{harv}} z_{ist} \\
& - \sum_{i \in \mathcal{I}} c_i^{harv} \cdot AREA_i \cdot \sum_{(s, t) \in \mathcal{S}^{harv}} z_{ist} \\
& - \sum_{i \in \mathcal{I}, j \in \mathcal{J}, p \in \mathcal{P}, t \in \mathcal{T}} c_p^{tr-raw} \cdot d_{ij} \cdot X_{ijpt} \\
& - \sum_{j \in \mathcal{J}, k \in \mathcal{K}, (p, p') \in \mathcal{Q}, t \in \mathcal{T}} c_{p'}^{tr-pre} \cdot d_{jk} \cdot X_{jkpp't} \\
& - \sum_{j \in \mathcal{J}, p \in \mathcal{P}, t \in \mathcal{T}} c_j^{stor} \cdot S_{jpt}
\end{aligned} \tag{5}$$

Here, R_{kp} are product- and consumer-specific revenues (€/t). The opportunity cost term penalises dereduced crop revenues in each year an AFS is established. Transport cost terms mirror the two-stage flow structure of the AFS supply chain with differentiated rates for raw and pre-treated biomass depending on the biomass type. Cost rates differ because as e.g. the density and water content of the shipped biomasses differ or because specialized equipment (e.g. for log transports) is used [REFERENCES]. Moreover, site-specific establishment cost for planting the AFS trees is considered, next to yearly maintenance costs and harvesting cost. All these costs scale with the size of a site ($AREA_i$) measured in hectar. Maintenance cost comprise e.g. costs for trimming, replanting, and pruning unnecessary shoots. Storage costs are considered if biomasses are stored for more than a year to compensate direct costs (e.g. for storage site maintenance) but primarily opportunity cost due to potential material losses and capital commitment. The usual case is that AFS are harvested at the beginning of a year. Harvested biomass dry during spring and summer such that the biomasses can be used in autumn or winter the same year. As drying is necessary for most industrial applications and beneficial for transport economics, drying storage in the year of harvest is not associated with additional cost.

338 3.4. Constraints

339 Constraints (6) limit each site to at most one establishment decision over the planning
340 horizon. Constraints (7) enforce flow conservation in each period. If an activity in period
341 $t \in \mathcal{T}$ takes place, there needs to be a preceeding activity (harvest or establishment) and
342 a succeeding activity (harvest or termination). This way, (7) guarantee valid (possibly
343 empty) activity paths over the complete time horizon for each site. Constraints (8) links
344 the binary harvest-cycle variables to physical yield quantities via the age-dependent yield
345 coefficients $\eta_{p(t-s)}$. These coefficients are pre-computed by evaluating the component-
346 specific Gompertz functions (??) and (??) at stand age $a = t - s$ and scaled by site
347 area AREA_i . Thus, implicitly we assume constant yields per hectar for each site i . Note
348 that this simplification can be dropped and site-specific yields $\eta_{ip(t-s)}$ could be intro-
349 duced without increasing numerical complexity of the AFS-SCD . Constraints (??)–(9)
350 link harvest quantities to transport flows and ensure inventory balance at each facility,
351 following the multi-period network-flow structure of OPTIMASS (De Meyer et al., 2014,
352 2016). Thereby, harvest quantities can be smaller than available AFS biomasses allowing
353 partial harvesting. Constraints (10)–(11) enforce storage and processing capacity limits
354 at each facility j . Constraints (12) implement product usage at multiple consumption
355 sites k . Thereby, $(p', p) \in \mathcal{Q}$ defines a product mapping allowing high-quality product
356 p' (e.g. stems) satisfying demand of a lower-quality products p up to maximum demand
357 $D_{kpt}^{\max}$. This way, the cascading principle is operationalized as a central economic ratio-
358 nale.

$$\sum_{(0,t) \in \mathcal{S}^{est}} z_{i0t} \leq 1 \quad \forall i \in \mathcal{I} \quad (6)$$

$$\sum_{(s,t) \in \mathcal{S}} z_{ist} = \sum_{(t,u) \in \mathcal{S}} z_{itu} \quad \forall i \in \mathcal{I}, t \in \mathcal{T} \quad (7)$$

$$\sum_{j \in \mathcal{J}} X_{ijpt} \leq \sum_{(s,t) \in \mathcal{S}^{harv}} \eta_{p(t-s)} \cdot \text{AREA}_i \cdot z_{ist} \quad \forall i \in \mathcal{I}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (8)$$

$$S_{jpt} = S_{jp,t-1} + \sum_{i \in \mathcal{I}} X_{ijpt} - \sum_{k \in \mathcal{K}, (p,p') \in \mathcal{Q}} X_{jkpp't} \quad \forall j \in \mathcal{J}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (9)$$

$$\sum_{p \in \mathcal{P}} S_{jpt} \leq \text{CAP}_j^{stor} \quad \forall j \in \mathcal{J}, t \in \mathcal{T} \quad (10)$$

$$\sum_{i \in \mathcal{I}, p \in \mathcal{P}} X_{ijpt} \leq \text{CAP}_j^{proc} \quad \forall j \in \mathcal{J}, t \in \mathcal{T}^{harv} \quad (11)$$

$$\sum_{j \in \mathcal{J}, (p',p) \in \mathcal{Q}} X_{jkp'pt} \leq D_{kpt}^{\max} \quad \forall k \in \mathcal{K}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (12)$$

$$z_{ist} \in \{0, 1\} \quad \forall i \in \mathcal{I}, (s, t) \in \mathcal{S} \quad (13)$$

$$Y_{ipt}, X_{ijpt}, X_{jkp'pt}, S_{jpt} \geq 0 \quad \forall i, j, k, p, p', t \quad (14)$$

359 The yield coefficients η_{pa} in (8) are the critical bridge between the stand-level growth
 360 model of Chapter~2 and the supply chain optimisation. For stand age $a = t - s$ and
 361 product component p , they are computed as:

$$\eta_{pa} = f_p(a) \cdot M^{sl}(a) = \frac{h_p(a)}{\sum_{p'} h_{p'}(a)} \cdot a^\infty \cdot e^{-e^{-b'^1 \cdot (a-\tau)}}, \quad (15)$$

362 where $M^{sl}(a)$ follows from (??) and $f_p(a)$ follows from (??). For poplar clone Max~3 un-
 363 der SRAFS conditions, the component-specific Gompertz parameterisations from Section
 364 2.2 imply that $\eta_{stem,a}$ rises steeply between ages~4 and 10, while $\eta_{branch,a}$ and $\eta_{residue,a}$
 365 plateau earlier, as illustrated in Figure ???. This age-dependence of product fractions is
 366 the core mechanism through which rotation-length decisions — governed by $A^{\min}$ and
 367 $A^{\max}$ and the arc set $\mathcal{S}$ — determine achievable product portfolios and, hence, revenues
 368 in the objective function (5).

369 4. Case Study

370 The proposed MILP model is intended to support the design of agroforestry biomass
371 supply chains for cleaner production in specific regional contexts. In a forthcoming case
372 study, we focus on poplar-based alley-cropping systems in a temperate European setting,
373 informed by empirical data from SRAFS trials in Southern Germany and SRC plantations
374 in Central Europe (Huber et al., 2018; Trnka et al., 2008; Testa et al., 2014).

375 4.1. Study Region and Supply Chain Configuration

376 The proposed AFS-SCD model is instantiated on a real-world biomass supply chain lo-
377 cated in the tri-state region of Saxony-Anhalt, northern Thuringia, and northern Saxony,
378 Germany (Figure 6). This region combines the highest density of registered short-rotation
379 coppice (SRC) Feldblöcke in eastern Germany with a cluster of major wood-processing
380 industries that collectively represent one of the largest forest-based biomass demand cen-
381 tres in Central Europe. The spatial extent of the study region covers approximately
382 250×200 km, with road distances between potential KUP sites and consumer locations
383 ranging from under 10 km to over 180 km.

384 The supply chain comprises three node types: (i) KUP production sites $\mathcal{I}$, (ii) pre-
385 treatment and intermediate storage facilities $\mathcal{J}$, and (iii) consumer sites $\mathcal{K}$. Candidate
386 KUP sites are drawn from the official Feldblock register of Saxony-Anhalt, filtered to
387 parcels with a minimum area of 1 ha and classified as potentially suitable for SRC
388 under the InVeKoS land-use scheme. Following the two-stage spatial clustering procedure
389 described in Section 4, the $|\mathcal{I}| = 2239$ raw Feldblöcke are grouped into K super-sites using
390 DBSCAN ($\varepsilon = 15$ km, $minPts = 3$) and Ward.D2 hierarchical clustering (maximum
391 within-cluster radius 15 km), yielding a computationally tractable MILP instance while
392 preserving the total eligible area. The HAC cluster assignments, visible as distinct colour
393 zones in Figure 6, confirm a spatially coherent partitioning: dense KUP corridors along
394 the Elbe and Saale floodplains form contiguous super-sites, while isolated parcels in the
395 Harz foothills constitute smaller or singleton clusters.

396 Two types of intermediate infrastructure nodes are considered: conventional sawmills
397 and logistics hubs. Sawmills perform primary mechanical processing (debarking, chip-
398 ping) and can serve product streams P1 and P2; logistics hubs serve as consolidation

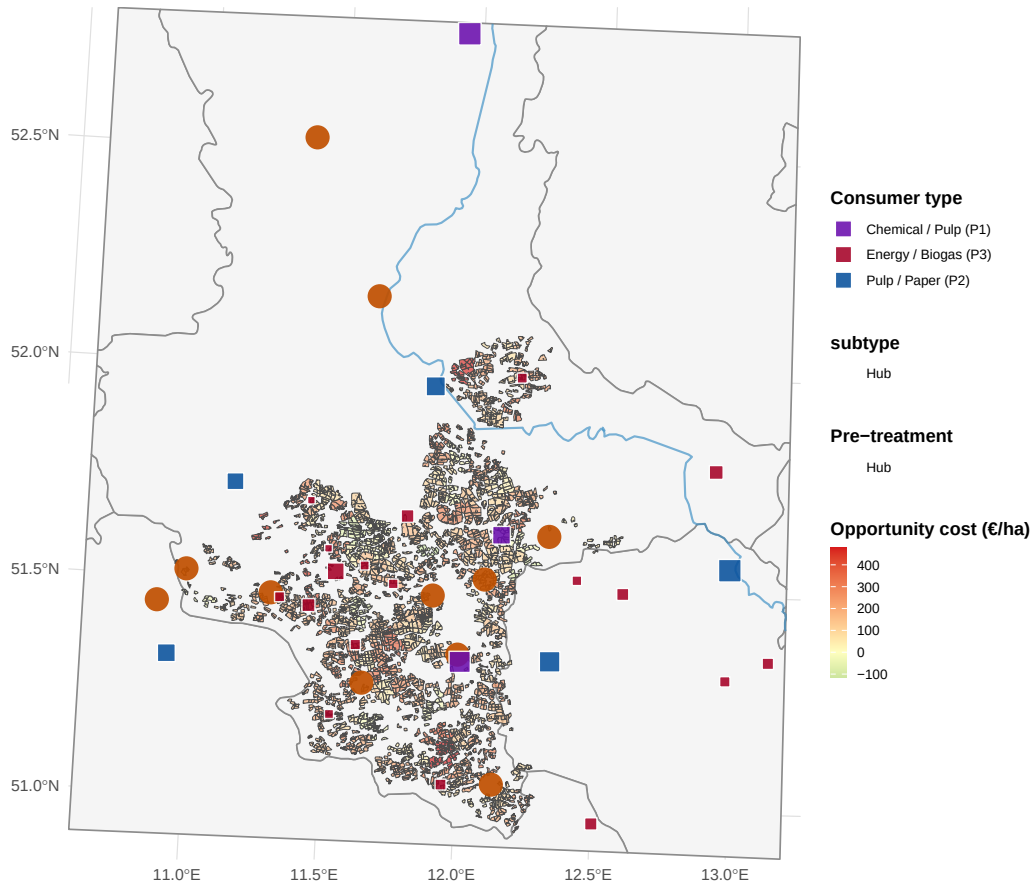


Figure 6: AFS supply chain network in Saxony-Anhalt. Grey lines: German federal state boundaries. Blue lines: major rivers. Coloured polygons: potential KUP/AFS sites grouped by HAC super-site (colours encode cluster membership; no legend). Orange symbols: pre-treatment facilities (circle = sawmill, triangle = logistics hub, size proportional to processing capacity). Coloured squares: consumer sites (violet: P1 chemical/pulp, blue: P2 pulp/paper, red: P3 energy/biogas, size proportional to total demand).

and temporary storage points for all three product grades and are characterised by lower capital intensity but limited processing capacity. The $|\mathcal{J}| = 11$ candidate storage/pre-treatment locations are sourced from publicly registered forestry enterprises and existing logistic nodes in the study region. Road distances d_{ij} (site i to storage j) and d_{jk} (storage j to consumer k) are computed via the OSRM open-source routing engine using the German road network, providing realistic transport cost estimates that are embedded directly in the MILP objective.

4.2. Consumer Demand and Product Classification

Nine consumer sites are included in the base case ($|\mathcal{K}| = 9$), covering the full quality cascade from high-value chemical/pulp applications down to energy use (Table 4). Consumer demands $D_{kpt}^{\max}$ are derived from publicly reported annual throughput figures, production capacities, and regulatory filings, and are held constant across periods ($D_{kpt}^{\max} = D_{kp}^{\max} \forall t \in \mathcal{T}$) to reflect stable long-term offtake contracts.

Three biomass product grades are distinguished, reflecting the cascading-use principle embedded in the AFS-SCD objective:

- **P1 – Chemical/pulp grade** ($p = 1$): long-fibre hardwood chips suitable for chemical pulping and biorefinery conversion. Dominated by Mercer Stendal GmbH (Arneburg, 1{,}500 kt/yr) and Zellstoff Rosenthal/Mercer (Blankenstein, 1{,}000 kt/yr), which together account for 403% of total P1 demand. UPM Biochemicals (Leuna) contributes 500 kt/yr of high-purity beech-fraction demand for biochemical conversion. Gate prices for P1 range from 80 to 120 €/t wood input.
- **P2 – Sawlog/pulpwood grade** ($p = 2$): roundwood and chipped material suitable for mechanical processing in sawmills. Demand is distributed across six smaller facilities with individual annual demands of 5–300 kt/yr. Gate prices range from 55 to 75 €/t.
- **P3 – Energy/pellets grade** ($p = 3$): residual wood fractions (chips, bark, off-cuts) used for heat and electricity generation or pellet production. This grade absorbs material that cannot meet P1 or P2 quality thresholds, operationalising the cascade constraint in the MILP. Gate prices range from 30 to 40 €/t.

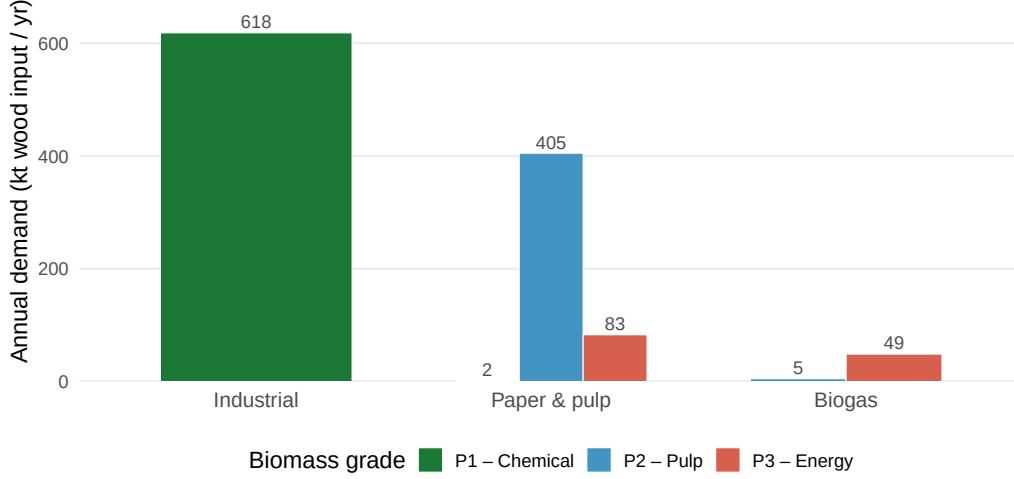


Figure 7: Total biomass demand by consumer type and grade (P1 chemical, P2 pulp & paper, P3 energy/biogas). Bars show aggregated annual demand in kt wood input per year across all individual plants within each consumer type.

428 The demand derivation follows a three-step procedure. First, publicly available ca-
 429 pacity data (kt wood input per year) are collected for each facility from official sources,
 430 industry reports, and corporate disclosures (Mercer Stendal GmbH, 2024; UPM Bio-
 431 chemicals, 2024). Second, the total annual capacity is assigned to the product grade that
 432 corresponds to the primary feedstock of each facility (P1 for chemical/biorefinery pro-
 433 cesses, P2 for mechanical sawmilling, P3 for thermal conversion and pellet lines). Third, a
 434 minor P3 component is added to sawmill facilities to capture by-product streams (bark,
 435 sawdust), consistent with observed industrial practice. The resulting demand matrix
 436 $D_{kp}^{\max}$ (kt/yr) is shown in Figure 7 and summarised in Table 4. Aggregate demand across
 437 the study region totals 620.5 kt/yr for P1, 410 kt/yr for P2, and 131.7 kt/yr for P3.

438 4.3. MILP Model Parameters


439 Table 5 summarises all scalar parameters of the AFS-SCD instance. The planning
 440 horizon covers $|\mathcal{T}| = 15$ periods, corresponding to one full poplar rotation (years 1–15),
 441 with a minimum harvest age $a^{\min} = 4$ and maximum productive stand age $a^{\max} = 15$
 442 (Lehmkuhl et al., 2023). Biomass yield functions η_{pa} (odt ha⁻¹ yr⁻¹) follow the age-
 443 structured Gompertz profile calibrated in Section 2.2, where distinct yield curves are

444 assigned to each product grade to reflect the fraction of stem, branch, and foliage biomass
 445 that qualifies under each quality threshold.

446 Transport costs are disaggregated into two components reflecting the two-echelon
 447 logistics structure. Raw material transport from site i to pre-treatment facility j incurs
 448 a variable cost $c^{tr-raw} \cdot d_{ij}$ ($\text{€ t}^{-1} \text{ km}^{-1}$), while processed material transport from j to
 449 consumer k is costed at $c^{tr-pre} \cdot d_{jk}$. The pre-treatment rate c^{tr-pre} is set lower than c^{tr-raw}
 450 to reflect the higher load density and standardised packaging of chipped and pelletised
 451 material compared to loose roundwood. An opportunity cost parameter c^{opp} (€ ha^{-1}
 452 yr^{-1}) accounts for foregone agricultural revenue on converted parcels, calibrated to the
 453 average arable land rental rate in Saxony-Anhalt (Statistisches Bundesamt (Destatis),
 454 2023). Storage capacity at each facility j is bounded by $\bar{S}_j$, and processing capacity by
 455 $\bar{C}_j$ (kt yr^{-1}), both drawn from publicly available facility data.

456 4.4. Optimization results

457 5. Sensitivity analysis

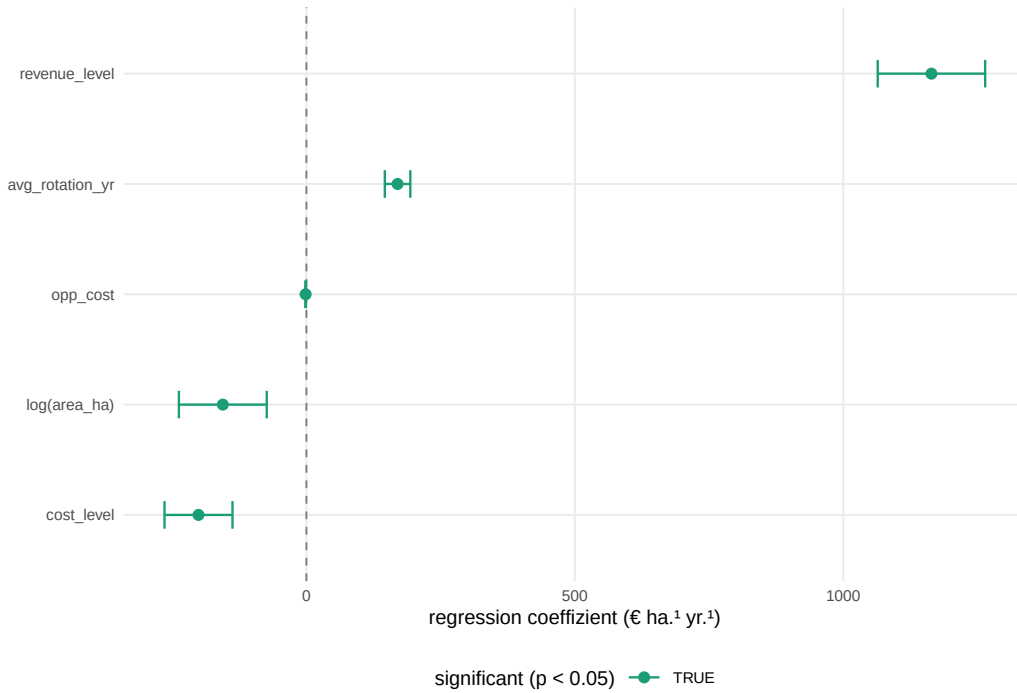

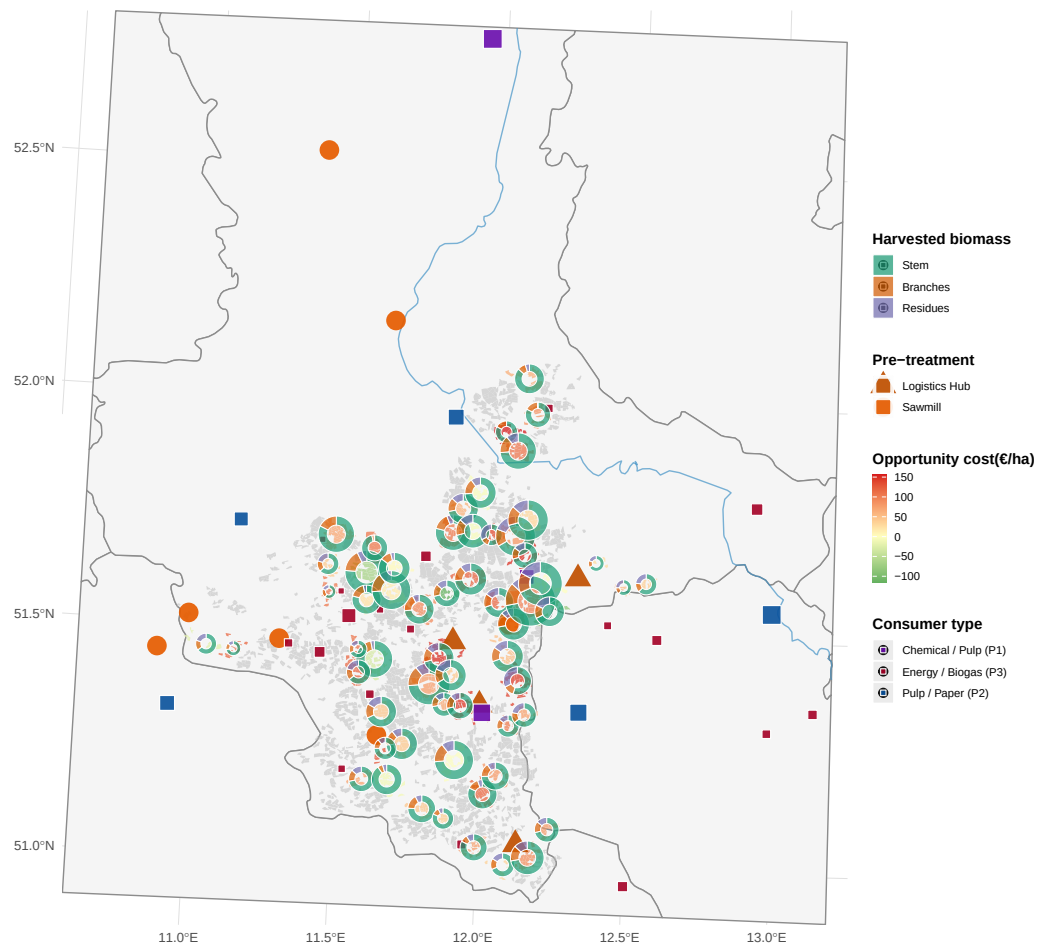


Figure 8: Optimal agroforestry supply chain network. Green polygons: active super-sites with biomass harvest; grey polygons: non-selected sites. Pie charts at active sites show the product mix of harvested biomass (stem = P1, branches = P2, residues = P3), scaled by total harvested volume. Orange symbols: pre-treatment facilities (circle = sawmill, triangle = logistics hub). Coloured squares: consumer sites by dominant demand category.

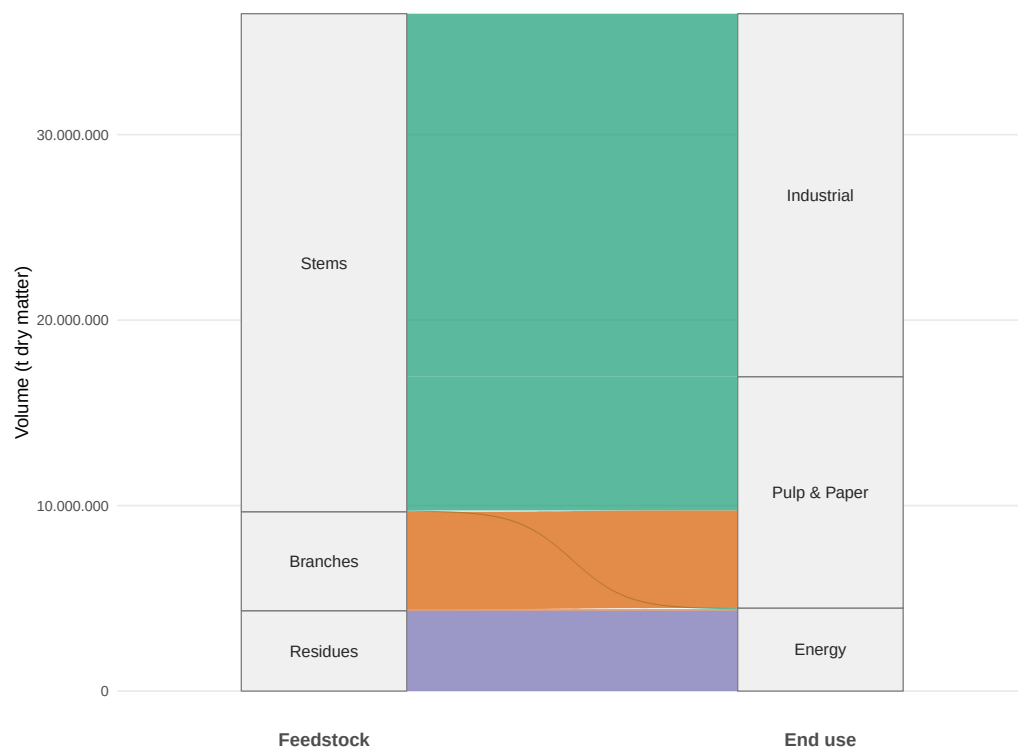


Figure 9: Total production quantity of biomass types and its industrial usage over planning horizon (in tons).

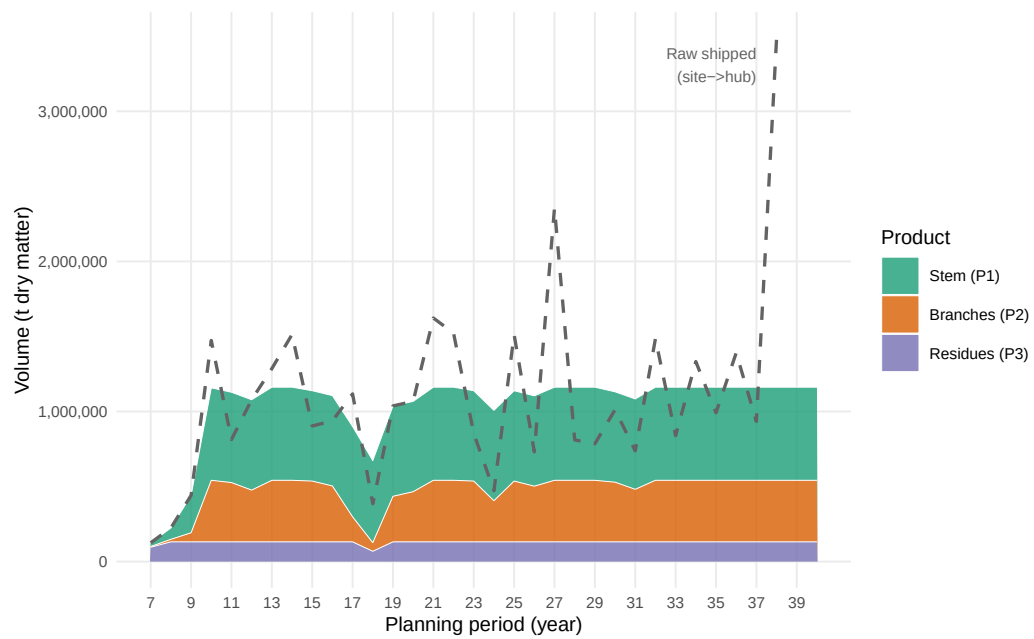


Figure 10: Total biomass delivered to consumers by product type over the planning horizon. Stacked areas show period-level volumes of stem (P1), branches (P2), and residues (P3) flowing from storage hubs to all consumers. Dashed line: total harvested raw biomass shipped from sites to hubs.

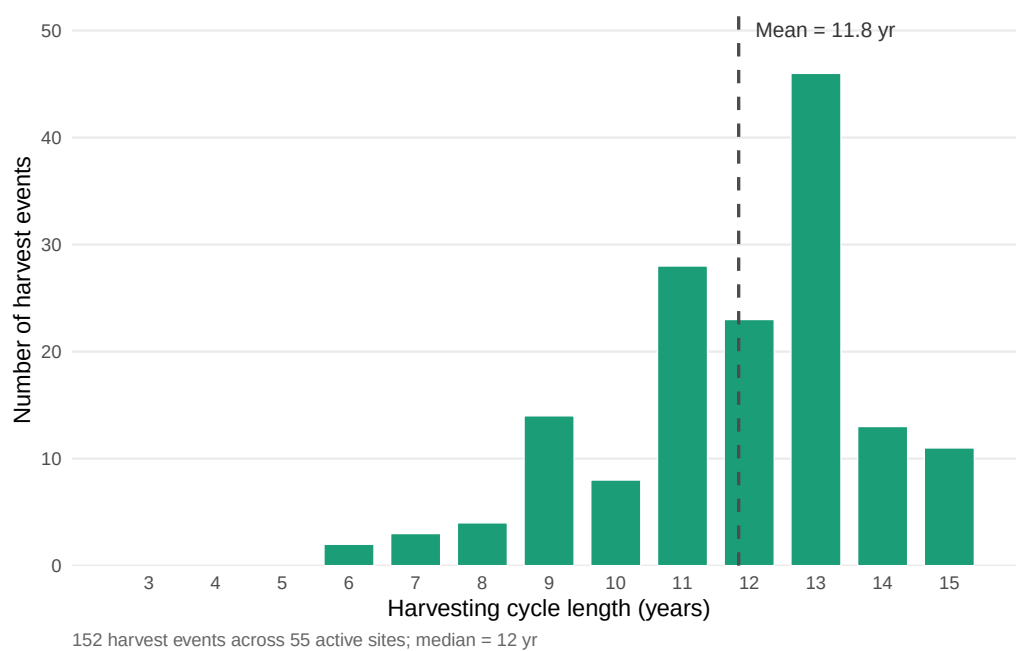


Figure 11: Distribution of harvesting cycle lengths at active agroforestry sites. Each bar represents the number of individual harvest events (over all periods and active sites) whose cycle length (stand age at harvest, i.e. $t - s$) falls in that year bin. Vertical dashed line: mean cycle length. Active sites are defined as sites with at least one selected harvest arc in the optimal solution.

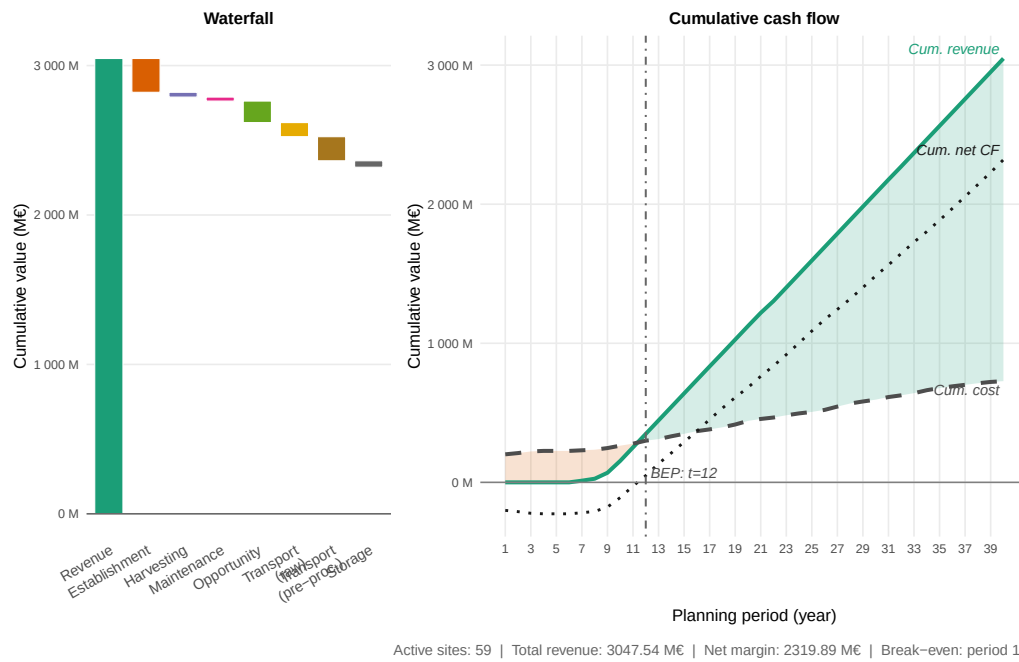


Figure 12: Total cost–profit breakdown across all active sites over the planning horizon. The left panel (waterfall) decomposes the objective value into revenue and individual cost categories; the right panel shows the period-level trajectory of revenues and stacked costs. Cultivation costs are split into establishment, harvesting, maintenance, and opportunity costs; logistics costs cover raw biomass transport (site→hub) and pre-processed transport (hub→consumer); storage costs reflect hub inventory holding charges.

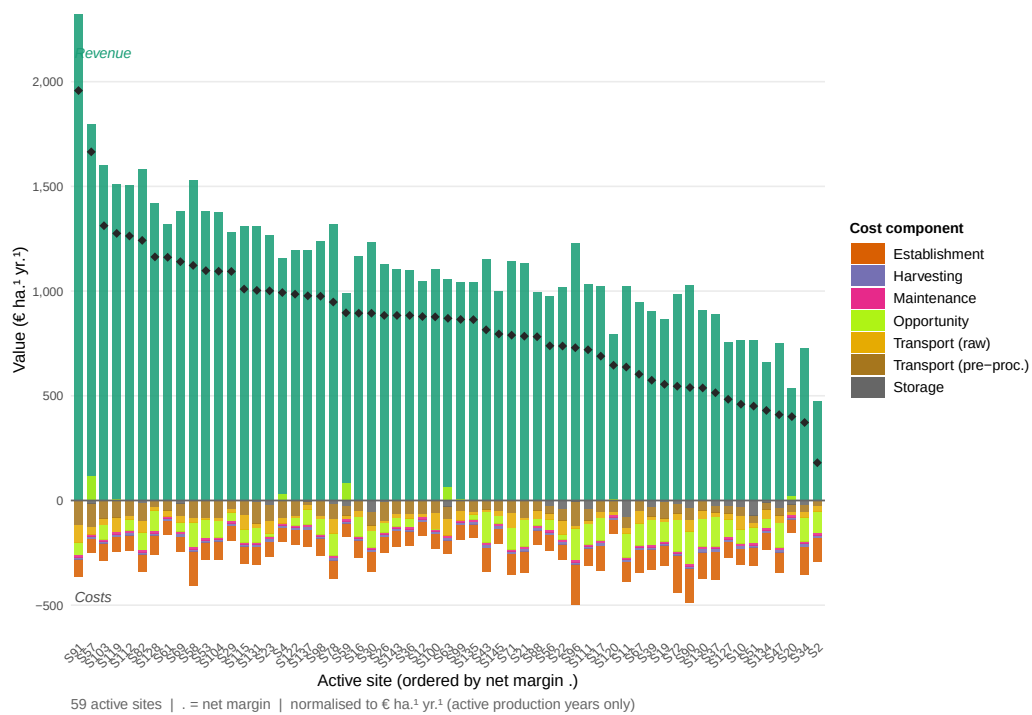


Figure 13: Total revenue and cost breakdown per active agroforestry site over the full planning horizon. Each bar represents one active site; revenue (green, above zero axis) and cost components (stacked below) are expressed in thousand euros per hectare for comparability across sites of different size. Sites are ordered by descending net margin.

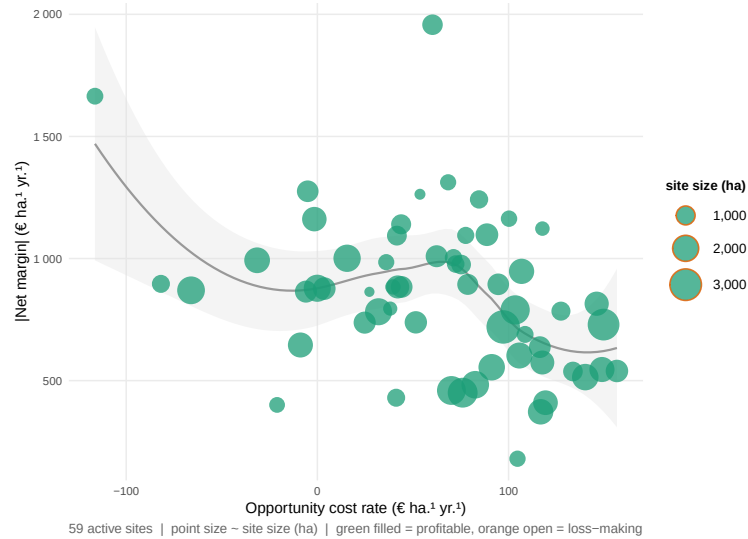


Figure 14: Scatterplot of active agroforestry sites: opportunity cost rate ($\text{€ ha}^{-1} \text{yr}^{-1}$) on the x-axis versus demand-weighted average delivery distance (km) on the y-axis. Point size is proportional to the site's net margin ($\text{€ ha}^{-1} \text{yr}^{-1}$); sites with negative net margin are shown as open circles. A LOESS smoothing line indicates the joint trend.

6. Conclusion

7. Appendix

References

- Mohsen Arabi, Saeed Yaghoubi, and Hamed Tajik. Optimal design of a microalgae-based biofuel supply chain with co2 reduction and hydrogen production. *Computers & Chemical Engineering*, 130:106530, 2019. ISSN 0098-1354. doi: 10.1016/j.compchemeng.2019.106530.
- Claudia Cambero and Taraneh Sowlati. Assessment and optimization of forest biomass supply chains from economic, social and environmental perspectives—a review of literature. *Renewable and Sustainable Energy Reviews*, 36:62–73, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2014.04.041.
- Vincenzo Civitarese, Andrea Acampora, Giulio Sperandio, Alberto Assirelli, and Rodolfo Picchio. Production of wood pellets from poplar trees managed as coppices with different harvesting cycles. *Energies*, 12(15):2973, 2019. doi: 10.3390/en12152973. Open access.
- Anouck De Meyer, Dirk Cattrysse, Jussi Rasinmäki, and Jos Van Orshoven. Methods to optimise the design and management of biomass-for-bioenergy supply chains: A review. *Renewable and Sustainable Energy Reviews*, 31:657–670, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2013.12.036.
- Anouck De Meyer, Dirk Cattrysse, and Jos Van Orshoven. A generic mathematical model to optimise

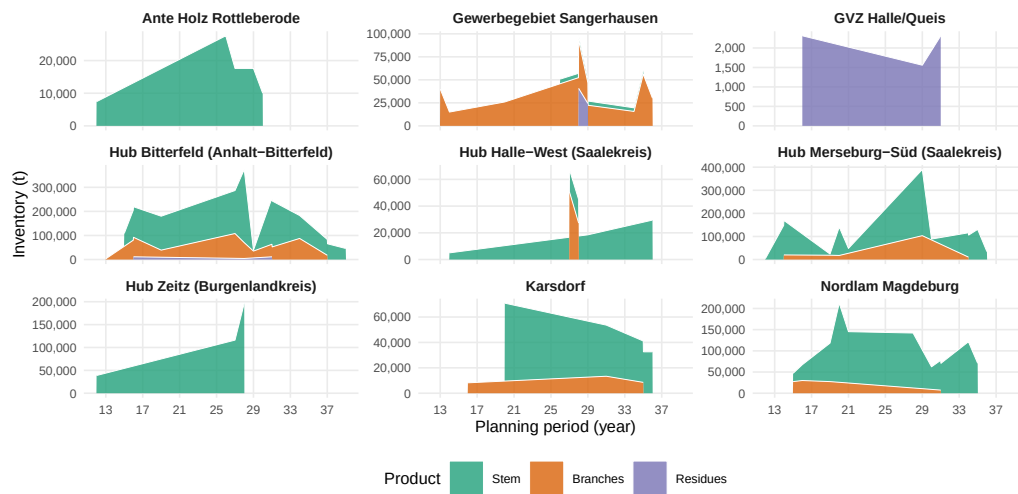


Figure 15: End-of-period inventory levels at storage/pre-treatment hubs, disaggregated by product type. Each panel corresponds to one active hub.

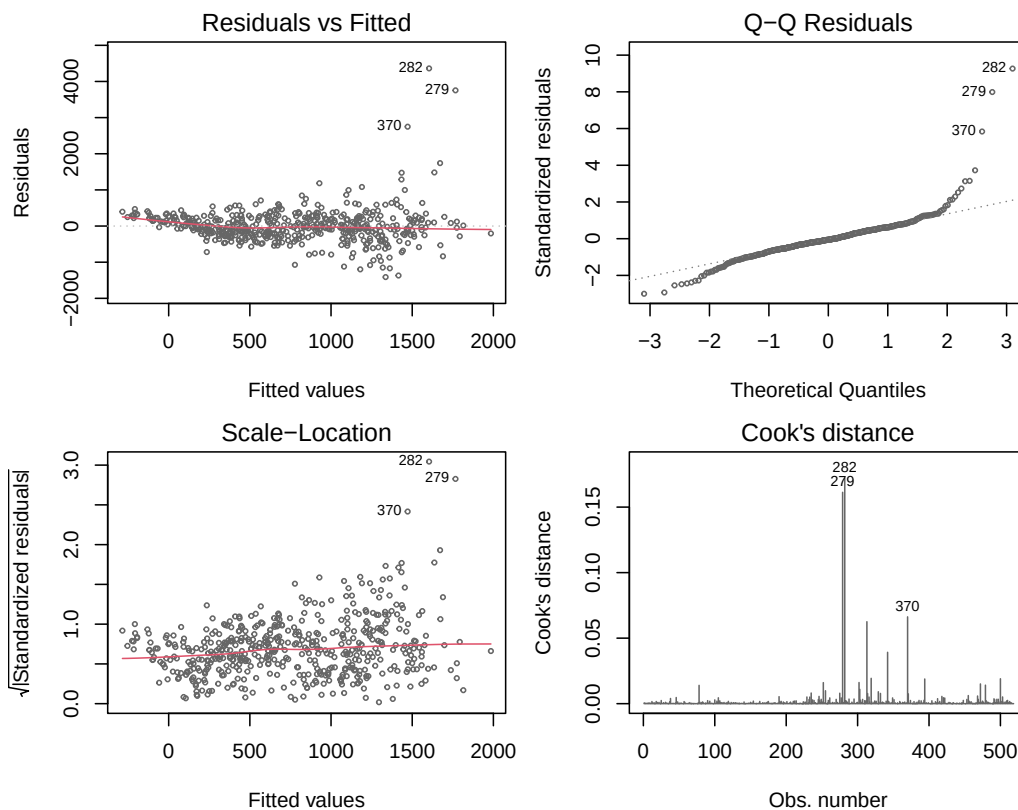


Figure 16: OLS-Diagnostik: Residuen vs. Fitted, Q-Q-Plot, Scale-Location und Cook's Distance.

strategic and tactical decisions in biomass-based supply chains (OPTIMASS). *European Journal of Operational Research*, 249(1):293–307, 2016. ISSN 0377-2217. doi: 10.1016/j.ejor.2015.08.003.

Sandra Duni Ekşioğlu, Aditya Acharya, Lawrence E. Leightley, and Sumit Arora. Analyzing the design and management of biomass-to-biorefinery supply chain. *Computers & Industrial Engineering*, 57(4):1342–1352, 2009. ISSN 0360-8352. doi: 10.1016/j.cie.2009.07.003.

Victor Espinoza, Selene Bautista, Patricia C. Narvaez, Mauricio Alfaro, and Mauricio Camargo. Sustainability assessment to support governmental biodiesel policy in Colombia: A system dynamics model. *Journal of Cleaner Production*, 141:1145–1163, 2017. ISSN 0959-6526. doi: 10.1016/j.jclepro.2016.09.168.

Ralf J. Faasch and Gaia Patenaude. The economics of short rotation coppice in Germany. *Biomass and Bioenergy*, 45:27–40, 2012. ISSN 0961-9534. doi: 10.1016/j.biombioe.2012.04.012.

Anil R. Graves, Paul J. Burgess, Fabrice Liagre, Andrea Pisanelli, Patrice Paris, Gerardo Moreno, Manuel Bellido, Manuela Mayus, Meindert Postma, Bernhard Schindler, Konstantinos Mantzanas, and Christian Dupraz. Development and application of bio-economic modelling to compare silvoarable, arable, and forestry systems in three European countries. *Ecological Engineering*, 29(4):434–449, 2007. ISSN 0925-8574. doi: 10.1016/j.ecoleng.2006.09.018.

Henning Grünewald, Reinhold Böcker, B. Ulrich Schneider, Oliver Bens, and Reinhard F. Hüttel. Biomass production of black locust (*Robinia pseudoacacia* L.) short rotation plantations in Germany: growth and economics of different clones and management practices. *Bioresource Technology*, 98(2):281–286, 2007. ISSN 0960-8524. doi: 10.1016/j.biortech.2006.01.004.

Georg Huber, Kurt-Jürgen Hülsbergen, and Harald Schmid. Allometric equations for above-ground tree-biomass estimation in Southern German short-rotation agroforestry systems. *Bioenergy Research*, 9(3):955–968, 2016. ISSN 1939-1234. doi: 10.1007/s12155-016-9744-z.

Georg Huber, Christian Amann, Kurt-Jürgen Hülsbergen, and Harald Schmid. Yield potential of tree species in organic and conventional short-rotation agroforestry systems in Southern Germany. *Heliyon*, 4(1):e00543, 2018. ISSN 2405-8440. doi: 10.1016/j.heliyon.2018.e00543.

Kaushalendra Kumar Jha. Biomass production and carbon balance in two hybrid poplar (*populus euramericana*) plantations raised with and without agriculture in southern France. *Journal of Forestry Research*, 29(6):1689–1701, 2018. ISSN 1007-662X. doi: 10.1007/s11676-017-0555-3.

Patrick Lamers, Martin Junginger, Carlo Hamelinck, and André Faaij. Developments in liquid biofuels commodity trade. *Biofuels, Bioproducts and Biorefining*, 5(4):403–437, 2011. ISSN 1932-104X. doi: 10.1002/bbb.303.

Frank Lehmkuhl, Alexander Stauch, Roman Schneider, Franziska Feil, and Henning Grunewald. Short-rotation coppice with poplar and willow in Germany: Biomass potentials, rotation lengths, and land-use interactions. *Biomass and Bioenergy*, 176:106908, 2023. ISSN 0961-9534. doi: 10.1016/j.biombioe.2023.106908.

Krishna Teja Malladi and Taraneh Sowlati. Biomass logistics: A review of important features, optimization modelling and the new trends. *Renewable and Sustainable Energy Reviews*, 94:587–599, 2018. ISSN 1364-0321. doi: 10.1016/j.rser.2018.06.052.

514 Babak Mansoornejad, Efstratios N. Pistikopoulos, and Paul R. Stuart. Integrating forest biorefinery
515 metrics into supply chain design and analysis. *Forest Policy and Economics*, 26:43–54, 2013. ISSN
516 1389-9341. doi: 10.1016/j.forpol.2012.08.003.

517 Mercer Stendal GmbH. Mercer stendal: Zellstoffwerk Arneburg – kapazitäten und rohstoffversorgung.
518 Unternehmenswebsite, 2024. URL <https://www.mercerint.com/de/stendal/>. Abgerufen: April 2026.

519 P. K. Ramachandran Nair. *An Introduction to Agroforestry*. Kluwer Academic Publishers, Dordrecht,
520 1993. ISBN 978-0-7923-2134-7.

521 Marcin Niemczyk and Brian R. Thomas. Does intensive management affect wood density and fiber
522 properties of hybrid poplar grown in short-rotation plantation? *Forests*, 12(4):399, 2021. ISSN
523 1999-4907. doi: 10.3390/f12040399.

524 Bhavna Sharma, Robert G. Ingalls, Christopher L. Jones, and Ajay Khanchi. Biomass supply chain
525 design and analysis: Basis, overview, modeling, challenges, and future. *Renewable and Sustainable*
526 *Energy Reviews*, 24:608–627, 2013. ISSN 1364-0321. doi: 10.1016/j.rser.2013.03.049.

527 Raffaele Spinelli, Carla Nati, and Natascia Magagnotti. Using modified foragers to harvest short-rotation
528 poplar plantations. *Biomass and Bioenergy*, 33(5):817–821, 2009. ISSN 0961-9534. doi: 10.1016/j.
529 biombioe.2009.01.002.

530 Statistisches Bundesamt (Destatis). Kaufwerte und pachtpreise für landwirtschaftliche grund-
531 stücke 2022 – Fachserie 3 Reihe 2.4. Technical report, Statistisches Bundesamt, Wiesbaden,
532 2023. URL [https://www.destatis.de/DE/Themen/Branchen-Unternehmen/Landwirtschaft-Forstwirtschaft-Fischerei/Flaechennutzung/Publikationen/Downloads-Flaechennutzung/](https://www.destatis.de/DE/Themen/Branchen-Unternehmen/Landwirtschaft-Forstwirtschaft-Fischerei/Flaechennutzung/Publikationen/Downloads-Flaechennutzung/kaufwerte-landwirtschaft-2030240227004.pdf)
533 [kaufwerte-landwirtschaft-2030240227004.pdf](https://www.destatis.de/DE/Themen/Branchen-Unternehmen/Landwirtschaft-Forstwirtschaft-Fischerei/Flaechennutzung/Publikationen/Downloads-Flaechennutzung/kaufwerte-landwirtschaft-2030240227004.pdf). Pachtpreise Sachsen-Anhalt, Tabelle 3.1.

534 Riccardo Testa, Anna Maria Di Trapani, Mario Foderà, Filippo Sgroi, and Salvatore Tudisca. Economic
535 evaluation of introduction of poplar as biomass crop in Italy. *Renewable and Sustainable Energy*
536 *Reviews*, 38:498–506, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2014.07.007.

537 Eric Toensmeier. The carbon farming solution: A global toolkit of perennial crops and regenerative
538 agriculture practices for climate change mitigation and food security. In *The Carbon Farming Solution*.
539 Chelsea Green Publishing, White River Junction, VT, 2017. ISBN 978-1-60358-571-2.

540 Miroslav Trnka, Jana Fialová, Vladimír Koutecký, Milan Fajman, Zdeněk Žalud, and Milan Havlíček.
541 Biomass production and survival rates of selected poplar clones grown under a short-rotation system
542 on agricultural land. *Plant, Soil and Environment*, 54(2):78–88, 2008. ISSN 1214-1178. doi: 10.17221/
543 2752-PSE.

544 UPM Biochemicals. UPM biochemicals leuna: Bioraffinerie für laubholz-biomassekonversion. Un-
545 ternehmenswebsite, 2024. URL <https://www.upmbiochemicals.com/de/>. Abgerufen: April 2026.

546 Dajun Yue, Fengqi You, and Seth W. Snyder. Biomass-to-bioenergy and biofuel supply chain optimiza-
547 tion: Overview, key issues and challenges. *Computers & Chemical Engineering*, 66:36–56, 2014. ISSN
548 0098-1354. doi: 10.1016/j.compchemeng.2013.11.016.

549 Seyed Mojib Zahraee, Nirajan Shiwakoti, and Peter Stasinopoulos. Biomass supply chain environmental,
550 economic, and social sustainability: A systematic literature review. *Industrial Crops and Products*,
551 145:112144, 2020. ISSN 0926-6690. doi: 10.1016/j.indcrop.2020.112144.

Table 3: Notation for the MILP model.

Sets & Indices	
$i \in \mathcal{I}$	Agroforestry sites
$j \in \mathcal{J}$	Storage / pre-treatment facilities
$k \in \mathcal{K}$	Consumer sites
$p \in \mathcal{P}$	Product types (stem, branches, residues)
$(p, p') \in \mathcal{Q}$	Admissible product-substitution pairs (quality cascade)
$\mathcal{T} = \{1, \dots, T_{\max}\}$	Planning periods (years)
$\mathcal{T}^+ = \{0, \dots, T_{\max} + 1\}$	Extended time set incl. dummy nodes
$\mathcal{T}^{\text{harv}} = \{A^{\min} + 1, \dots, T_{\max}\}$	Feasible harvest periods
$\mathcal{S}^{\text{est}} = \{(0, t) \mid t \in \{1, \dots, T_{\max} - A^{\min}\}\}$	Establishment arcs: dummy source to period t
$\mathcal{S}^{\text{harv}} = \{(s, t) \mid s, t \in \mathcal{T}, t - s \in \{A^{\min}, \dots, A^{\max}\}\}$	Harvest cycles within age-lag bounds
$\mathcal{S}^{\text{term}} = \{(s, T_{\max} + 1) \mid s \in \{A^{\min} + 1, \dots, T_{\max}\}\}$	Termination arcs to dummy sink $T_{\max} + 1$
$\mathcal{S} = \mathcal{S}^{\text{est}} \cup \mathcal{S}^{\text{harv}} \cup \mathcal{S}^{\text{term}}$	Age-lag arc set (establishment $\cup$ harvest $\cup$ termination)
Decision Variables	
$z_{ist} \in \{0, 1\}$	1 if s and t are consecutive harvest cycles at site i
$Y_{ipt} \geq 0$	Harvest quantity (t) of product p at site i in period t
$X_{ijpt} \geq 0$	Transport flow (t) of p from site i to facility j in t
$X_{jkpp't} \geq 0$	Flow of p from facility j to consumer k satisfying demand p' in t
$S_{jpt} \geq 0$	Inventory (t) of product p at facility j end of period t
Parameters	
$T_{\max}$	Length of planning horizon (years)
$A^{\min}, A^{\max}$	Minimum / maximum stand age at harvest (years)
AREA_i	Area of site i (ha)
η_{pa}	Yield coefficient (t/ha) of product p at stand age a , derived from (??)–(??)
R_{kp}	Revenue (€/t) for product p at consumer k
C_i^{est}	Establishment cost (€/ha) at site i
C_i^{opp}	Annual opportunity cost (€/ha) at site i
C_i^{harv}	Harvest & refitting cost (€/ha) at site i
$c^{\text{tr-raw}}$	Transport cost rate (€/t km) for raw biomass
$c^{\text{tr-pre}}$	Transport cost rate (€/t km) for pre-treated biomass
c_j^{stor}	Storage holding cost (€/t) at facility j
d_{ij}, d_{jk}	Distance (km) between nodes
$\text{CAP}_j^{\text{stor}}$	Storage capacity (t) at facility j
$\text{CAP}_j^{\text{proc}}$	Processing throughput capacity (t/period) at facility j
$D_{kpt}^{\max}$	Maximum demand (t) of product p at consumer k in period t

Table 4: Consumer demand quantities and gate prices by product grade. P1: chemical/pulp; P2: sawlog/pulpwood; P3: energy/pellets. Demands in kt wood input per year; prices in €/t wood input at the factory gate.

Consumer	Annual demand			Gate price		
	P1 (kt/yr)	P2 (kt/yr)	P3 (kt/yr)	P1 (€/t)	P2 (€/t)	P3 (€/t)
consumer 1	300.0	–	–	100	–	–
consumer 2	100.0	–	–	120	–	–
consumer 3	–	300	50.0	–	75	40
consumer 4	200.0	–	–	95	–	–
consumer 5	–	30	5.0	–	70	35
consumer 6	–	15	5.0	–	65	35
consumer 7	–	10	3.0	–	60	30
consumer 8	–	5	8.0	–	55	30
consumer 9	2.0	50	20.0	80	70	38
consumer 10	–	–	1.7	–	–	35
consumer 11	–	–	2.9	–	–	35
consumer 12	–	–	2.5	–	–	35
consumer 13	–	–	2.3	–	–	35
consumer 14	–	–	1.9	–	–	35
consumer 15	–	–	2.7	–	–	35
consumer 16	–	–	1.7	–	–	35
consumer 17	–	–	1.9	–	–	35
consumer 18	–	–	1.6	–	–	35
consumer 19	–	–	1.5	–	–	35
consumer 20	–	–	1.5	–	–	35
consumer 21	–	–	1.8	–	–	35
consumer 22	–	–	3.5	–	–	35
consumer 23	–	–	1.6	–	–	35
consumer 24	–	–	2.1	–	–	35
consumer 25	–	–	4.5	–	–	35
consumer 26	–	–	1.8	–	–	35
consumer 27	–	–	3.2	–	–	35
consumer 28	18.5	–	–	55	–	–

Table 5: AFS-SCD base-case parameter values for the Saxony-Anhalt case study. Transport costs refer to road distance (OSRM). Gate prices are weighted averages across consumer sites.

Parameter	Description	Base-case value	Unit
Index sets			
$ \mathcal{T} $	Planning periods	40	yr
$ \mathcal{I} $	KUP super-sites (post-clustering)	145	–
$ \mathcal{J} $	Pre-treatment / storage nodes	11	–
$ \mathcal{K} $	Consumer sites	28	–
$ \mathcal{P} $	Product grades	3	–
Biomass dynamics			
$a^{\min}$	Minimum harvest age (years)	3	yr
$a^{\max}$	Maximum stand age (years)	15	yr
Cost parameters			
c^{tr-raw}	Raw transport cost	0.08	€ t ⁻¹ km ⁻¹
c^{tr-pre}	Pre-processed transport cost	0.06	€ t ⁻¹ km ⁻¹
c^{opp}	Opportunity cost	166	€ ha ⁻¹ yr ⁻¹
Revenue parameters			
$\bar{R}_{P1}$	Mean gate price P1	90	€ t ⁻¹
$\bar{R}_{P2}$	Mean gate price P2	66	€ t ⁻¹
$\bar{R}_{P3}$	Mean gate price P3	35	€ t ⁻¹

Table 6: Key performance indicators for benchmark and sensitivity scenarios. Opp. cost: opportunity cost per hectare; Cost/Rev. mult.: multipliers relative to the baseline scenario (1.0 = baseline). Total profit is net revenue minus all costs over the full planning horizon; demand satisfaction reports the share of total customer demand served.

Scen.	Opp. cost (€/ha)	Cost mult.	Rev. mult.	Profit (€/ha · a)	Act. sites	Wood (kt/a)	Demand sat. (%)
Bench.	150	1.0	1.0	641	59	913	78.6%
1	150	0.5	0.5	262	58	837	72.0%
2	300	0.5	0.5	192	50	747	64.3%
3	150	2.0	0.5	66	44	695	59.8%
4	300	2.0	0.5	107	15	169	14.5%
5	150	0.5	1.5	686	95	911	78.4%
6	300	0.5	1.5	785	78	904	77.8%
7	150	2.0	1.5	886	64	911	78.3%
8	300	2.0	1.5	893	54	798	68.6%

Table 7: Overview on OLS regression result (adj. R^2 :52%, # observations: 511, σ : 474)

variable	estimate	std. error	t vaue	p value	CI 2.5%	CI 97.5%
<i>Intercept</i>	-1085.542	354.374	-3.063	0.002	-1781.752	-389.332
opp__cost	-1.446	0.294	-4.913	0.000	-2.025	-0.868
cost__level	-200.973	32.242	-6.233	0.000	-264.316	-137.629
revenue__level	1164.231	50.931	22.859	0.000	1064.170	1264.291
avg_rotation_yr	169.831	12.081	14.058	0.000	146.096	193.565
logarea__ha	-155.698	41.653	-3.738	0.000	-237.531	-73.866