

1 Agroforestry SmartAgroforest: Poplar biomass modelling

2 Thomas Kirschstein^{1,1,1,*}

3 Abstract

4 Short-rotation agroforestry systems are increasingly promoted as a low-carbon feedstock
5 option for bio-based value chains, but their economic viability depends on coordinated
6 decisions on stand establishment, multi-cycle harvesting, and product cascading in spa-
7 tially distributed supply chains. This paper develops a mixed-integer linear programming
8 (MILP) model for the integrated design and operation of an agroforestry biomass sup-
9 ply chain with explicit age-lag constraints that link consecutive harvests at each site.
10 The formulation couples allometric yield functions for different biomass types with a
11 multi-product, multi-period network design model including storage, processing, and
12 product quality cascades. The model is applied to a stylised case study of Central Euro-
13 pean poplar-based alley-cropping systems to explore trade-offs between harvest rotation
14 length, product portfolios, and infrastructure configuration. We outline a computational
15 experimentation plan to test the impact of allometric parameter uncertainty, price sce-
16 narios, and policy incentives on the optimal deployment of agroforestry systems in cleaner
17 bioeconomy pathways.

18 *Keywords:* Agroforestry, Short-rotation coppice, Biomass supply chain, Product
19 cascading

```
20 ## Building AFS-SCD LP (v11, MILP_v11.md relaxation, Gurobi-direct)...\n21 ## n_arcs=587 n_ppairs=6 nTh=37\n22 ## n_vars=331757 (z:85115 Xij:177045 S:1221 Xjk:68376)\n23 ## Model type: LP (z continuous in [0, AREA_i])\n24 ## C1 (LP, RHS=AREA_i): 145 rows
```

*Corresponding author

Email address: thomas.kirschstein@ikts.fraunhofer.de (Thomas Kirschstein)

```

25  ## C2: 5800 rows
26  ## C3 (LP, no AREA_i): 16095 rows
27  ## C4: 1221 rows
28  ## C5: 407 rows
29  ## C6: 407 rows
30  ## C7: 3108 rows
31  ## Total constraints: 27183 nnz: 1059537
32  ## Calling gurobi() [LP mode] vars=331757 constrs=27183
33  ## Set parameter Username
34  ## Set parameter LicenseID to value 2805714
35  ## Set parameter TimeLimit to value 300
36  ## Set parameter Method to value 2
37  ## Academic license - for non-commercial use only - expires 2027-04-10
38  ## Gurobi Optimizer version 12.0.1 build v12.0.1rc0 (win64 - Windows 11+.0 (26200.2))
39  ##
40  ## CPU model: AMD Ryzen AI 9 HX 370 w/ Radeon 890M, instruction set [SSE2|AVX|AVX2|AVX512]
41  ## Thread count: 12 physical cores, 24 logical processors, using up to 24 threads
42  ##
43  ## Non-default parameters:
44  ## TimeLimit 300
45  ## Method 2
46  ## LogToConsole 0
47  ##
48  ## Optimize a model with 27183 rows, 331757 columns and 1059537 nonzeros
49  ## Model fingerprint: 0x8e80528a
50  ## Coefficient statistics:
51  ## Matrix range [5e-02, 2e+02]
52  ## Objective range [1e-01, 1e+04]
53  ## Bounds range [3e+02, 4e+03]
54  ## RHS range [3e+02, 7e+07]
55  ## Presolve removed 2321 rows and 33023 columns

```

```

56  ## Presolve time: 0.37s
57  ## Presolved: 24862 rows, 298734 columns, 979451 nonzeros
58  ##
59  ## Ordering time: 0.40s
60  ##
61  ## Barrier statistics:
62  ##  AA' NZ      : 6.925e+05
63  ##  Factor NZ   : 1.040e+07 (roughly 200 MB of memory)
64  ##  Factor Ops  : 1.343e+10 (less than 1 second per iteration)
65  ##  Threads     : 12
66  ##
67  ##              Objective              Residual
68  ## Iter      Primal      Dual      Primal      Dual      Compl      Time
69  ##   0 -2.04678627e+14  2.44205123e+12  1.62e+09  1.91e+02  1.45e+10  1s
70  ##   1 -8.00036820e+13  7.14546207e+12  5.49e+08  7.33e+02  5.04e+09  1s
71  ##   2 -2.56196283e+13  5.92422097e+12  1.45e+08  2.83e+02  1.44e+09  1s
72  ##   3 -3.01338239e+12  4.77647549e+12  1.54e+07  4.85e+01  1.64e+08  1s
73  ##   4 -8.83133442e+11  3.93354842e+12  3.88e+06  3.03e+01  4.93e+07  1s
74  ##   5 -5.25413068e+11  3.38309001e+12  1.91e+06  2.34e+01  2.88e+07  1s
75  ##   6 -3.51926059e+11  2.74291425e+12  1.02e+06  1.80e+01  1.88e+07  2s
76  ##   7 -2.14778906e+11  1.52792337e+12  3.34e+05  9.08e+00  9.78e+06  2s
77  ##   8 -1.32796724e+11  6.71931141e+11  9.31e+04  2.50e+00  4.25e+06  2s
78  ##   9 -9.69301725e+10  3.18502916e+11  4.50e+04  9.72e-01  2.13e+06  2s
79  ##  10 -8.37684048e+10  2.32735068e+11  3.28e+04  7.16e-01  1.58e+06  2s
80  ##  11 -7.93039569e+10  2.16719002e+11  2.98e+04  6.68e-01  1.46e+06  2s
81  ##  12 -6.92341048e+10  1.97157952e+11  2.60e+04  5.88e-01  1.29e+06  2s
82  ##  13 -4.83752959e+10  1.37594177e+11  1.62e+04  3.41e-01  8.39e+05  2s
83  ##  14 -3.42967941e+10  1.34937892e+11  1.05e+04  4.03e-01  6.70e+05  2s
84  ##  15 -1.84745787e+10  1.11399736e+11  6.43e+03  4.31e-01  4.46e+05  2s
85  ##  16 -1.04293642e+10  5.53105993e+10  3.39e+03  1.67e-01  2.14e+05  2s
86  ##  17 -3.64658343e+09  3.04451486e+10  1.18e+03  5.74e-02  9.71e+04  2s

```

87	##	18	-1.22435590e+09	1.95559544e+10	5.17e+02	3.38e-02	5.57e+04	2s
88	##	19	-1.52426228e+08	1.41962508e+10	2.96e+02	2.32e-02	3.75e+04	3s
89	##	20	2.80432108e+08	1.12345511e+10	2.13e+02	1.73e-02	2.84e+04	3s
90	##	21	4.57708456e+08	8.98190580e+09	1.75e+02	1.79e-02	2.19e+04	3s
91	##	22	7.79164881e+08	6.95579646e+09	1.16e+02	9.06e-03	1.58e+04	3s
92	##	23	1.08075496e+09	5.90811864e+09	7.04e+01	7.11e-03	1.23e+04	3s
93	##	24	1.29463992e+09	4.82094019e+09	5.27e+01	5.08e-03	8.94e+03	3s
94	##	25	1.52925562e+09	4.07430001e+09	3.50e+01	3.60e-03	6.44e+03	3s
95	##	26	1.73042636e+09	3.72239346e+09	2.20e+01	2.93e-03	5.04e+03	3s
96	##	27	1.87423876e+09	3.32894984e+09	1.48e+01	2.12e-03	3.68e+03	3s
97	##	28	1.98871766e+09	3.16331693e+09	9.68e+00	1.77e-03	2.97e+03	3s
98	##	29	2.06828443e+09	3.05694882e+09	2.61e+01	1.57e-03	2.50e+03	3s
99	##	30	2.11173441e+09	2.80085621e+09	3.36e+01	9.88e-04	1.74e+03	3s
100	##	31	2.17187363e+09	2.72248056e+09	5.67e+01	8.28e-04	1.39e+03	3s
101	##	32	2.17975776e+09	2.69329254e+09	5.77e+01	7.59e-04	1.30e+03	4s
102	##	33	2.24880928e+09	2.63819409e+09	6.95e+01	6.30e-04	9.85e+02	4s
103	##	34	2.28911213e+09	2.56329237e+09	6.09e+01	4.32e-04	6.93e+02	4s
104	##	35	2.31269320e+09	2.50894167e+09	4.81e+01	2.89e-04	4.96e+02	4s
105	##	36	2.33367091e+09	2.47571720e+09	3.89e+01	1.93e-04	3.58e+02	4s
106	##	37	2.36029300e+09	2.45416103e+09	3.34e+01	1.28e-04	2.37e+02	4s
107	##	38	2.37795992e+09	2.44165273e+09	3.21e+01	8.77e-05	1.61e+02	4s
108	##	39	2.39233878e+09	2.43207962e+09	2.09e+01	5.50e-05	1.00e+02	4s
109	##	40	2.39758699e+09	2.42643618e+09	1.81e+01	3.55e-05	7.28e+01	4s
110	##	41	2.39974502e+09	2.42340302e+09	1.59e+01	2.49e-05	5.96e+01	4s
111	##	42	2.40559659e+09	2.42140255e+09	1.02e+01	1.79e-05	3.98e+01	4s
112	##	43	2.40998202e+09	2.41954635e+09	5.79e+00	1.14e-05	2.41e+01	5s
113	##	44	2.41239356e+09	2.41780073e+09	3.37e+00	5.39e-06	1.36e+01	5s
114	##	45	2.41446168e+09	2.41684489e+09	1.38e+00	2.19e-06	5.99e+00	5s
115	##	46	2.41534360e+09	2.41655818e+09	6.42e-01	1.23e-06	3.06e+00	5s
116	##	47	2.41568887e+09	2.41641132e+09	3.66e-01	7.57e-07	1.82e+00	5s
117	##	48	2.41582337e+09	2.41628879e+09	2.57e-01	3.54e-07	1.17e+00	5s

```

118 ## 49 2.41597651e+09 2.41623830e+09 1.41e-01 1.85e-07 6.57e-01 5s
119 ## 50 2.41605629e+09 2.41621817e+09 8.49e-02 1.24e-07 4.07e-01 5s
120 ## 51 2.41613097e+09 2.41620449e+09 2.79e-02 8.08e-08 1.85e-01 5s
121 ## 52 2.41615937e+09 2.41619103e+09 9.69e-03 4.21e-08 7.99e-02 6s
122 ## 53 2.41617088e+09 2.41618029e+09 2.87e-03 1.09e-08 2.37e-02 6s
123 ## 54 2.41617303e+09 2.41617812e+09 1.68e-03 5.02e-09 1.28e-02 6s
124 ## 55 2.41617587e+09 2.41617723e+09 1.84e-04 2.60e-09 3.44e-03 6s
125 ## 56 2.41617619e+09 2.41617673e+09 3.56e-05 1.24e-09 1.38e-03 6s
126 ## 57 2.41617626e+09 2.41617633e+09 5.98e-07 1.76e-10 1.75e-04 6s
127 ## 58 2.41617626e+09 2.41617626e+09 2.69e-08 4.63e-12 3.46e-07 6s
128 ## 59 2.41617626e+09 2.41617626e+09 4.01e-10 1.82e-12 3.07e-12 6s
129 ##
130 ## Barrier solved model in 59 iterations and 6.17 seconds (10.28 work units)
131 ## Optimal objective 2.41617626e+09
132 ##
133 ## Crossover log...
134 ##
135 ## 19888 DPushes remaining with DInf 0.0000000e+00 6s
136 ## 0 DPushes remaining with DInf 0.0000000e+00 7s
137 ##
138 ## 30 PPushes remaining with PInf 0.0000000e+00 7s
139 ## 0 PPushes remaining with PInf 0.0000000e+00 7s
140 ##
141 ## Push phase complete: Pinf 0.0000000e+00, Dinf 1.3455304e+00 7s
142 ##
143 ## Iteration Objective Primal Inf. Dual Inf. Time
144 ## 19090 2.4161763e+09 0.000000e+00 1.345530e+00 7s
145 ## 19096 2.4161763e+09 0.000000e+00 0.000000e+00 7s
146 ##
147 ## Solved in 19096 iterations and 6.84 seconds (10.68 work units)
148 ## Optimal objective 2.416176265e+09

```

149 ## Status: OPTIMAL ObjVal: 2.41618e+09

150 1. Introduction

151 Agroforestry systems that integrate trees with agricultural crops (silvoarable systems)
152 are increasingly recognised as a promising land-use option to reconcile climate mitigation,
153 biodiversity conservation, and rural income generation on the same hectare of land (Toens-
154 meier, 2017). Temperate agroforestry systems (AFS) based on fast-growing species such
155 as poplar, willow, alder, and black locust can deliver substantial biomass yields while im-
156 proving soil quality and providing multiple ecosystem services compared to conventional
157 monocultures (Huber et al., 2018). Biomass produced in AFS is considered as a sustain-
158 able feedstock and can be used either energetically, chemically or materially (e.g. in the
159 building sector). The latter two options are generally preferred over the energetic usage
160 from a cleaner production perspective as biogenic carbon is stored in products during
161 their life span which contributes to climate change mitigation.

162 Despite substantial research on ecological advantages and pioneering initiatives to
163 establish AFS in practice, the share of AFS in agricultural production systems is still
164 small. E.g., in Germany about 1200 hectares of silvoarable AFS are established in 2025,
165 which accounts for about 0.02% of total agricultural land use (Deutscher Fachverband
166 für Agroforstwirtschaft (DeFAF) e.V., 2026). One of the core challenges in establishing
167 AFS systems at large scale in practice is a lack of opportunities to generate substantial
168 revenues from woody biomasses of AFS. On the other hand, the rise of bioeconomy creates
169 substantial demands for woody biomass and requires a reliable and cost-efficient feedstock
170 supply. As woody biomasses are bulky feedstocks with low energy density, the design
171 of cost-efficient supply chains is crucial to ensure the economic viability of AFS-based
172 value chains. This requires coordinated decisions on stand establishment, multi-cycle
173 harvesting, and product cascading in spatially distributed supply chains, which can be
174 supported by integrated optimisation models that link stand-level growth dynamics to
175 regional supply chain design.

176 In the last two decades, a large body of research has analysed biomass supply chains
177 for bioenergy and biorefineries using mathematical programming models, often in the
178 form of mixed-integer linear programming (MILP) (Zahraee et al., 2020; Sharma et al.,

2013). These models typically optimise network configuration, feedstock sourcing, and logistics under cost or profit objectives. They often treat biomass availability as an exogenous input or rely on simplified agricultural production decisions. Moreover, downstream processing of biomasses is concentrated on one particular value chain e.g. bioenergy plants consuming all produced biomasses. Recent work has started to integrate operational details such as various biomass types, biomass growth models and regeneration processes in multi-period supply chain models.

The present paper contributes to this literature in three ways. First, we propose a novel MILP formulation for AFS-based biomass supply chain design that explicitly links establishment decisions and consecutive harvest decisions, ensuring that harvesting decisions at each site are consistent with minimum and maximum rotation ages. Second, we embed allometric yield functions for different biomass types generating age-specific yields for different woody biomass types (like stems, branches, or leaves and twigs). Third, these different woody biomass types can be processed in specific downstream industries, like chemical or paper industry as well as energy sector. The model aims to provide strategic decision support for establishing regional AFS-based bioeconomy ecosystems connecting multiple industries and product markets.

The remainder of the paper is structured as follows. Section 2 reviews the relevant literature on agroforestry biomass systems, allometric biomass modelling, and biomass supply chain optimisation. Section 3 summarises the MILP formulation for the agroforestry supply chain with age-lag constraints. Section 4 presents the case study instantiation, the base-case optimisation results, and the sensitivity analysis, examining the implications for cleaner production strategies.

2. Literature review

Agroforestry biomass systems, stand-level growth models, and biomass supply chain optimisation have each been studied extensively, but they are rarely combined in an integrated framework that links age-dependent stand dynamics to regional product-cascading value chains (Zahraee et al., 2020; Sharma et al., 2013; Espinoza et al., 2017). This section reviews (i) agroforestry systems with emphasis on system types, economics, and the cascading use of biomass as the primary revenue driver; (ii) biomass growth models at

209 tree and stand level with explicit attention to the allometric–diameter–stand–biomass
210 pathway; and (iii) biomass supply chain design using mathematical programming. The
211 section concludes by identifying the modelling gap addressed in this paper.

212 2.1. Agroforestry systems

213 Agroforestry deliberately integrates woody perennials with crops and/or livestock on
214 the same management unit, with the aim of enhancing productivity, profitability, and
215 environmental performance (Nair, 1993; Toensmeier, 2017). In the temperate zone, three
216 distinct system types can be distinguished based on the spatial arrangement of trees and
217 the rotation length at which woody biomass is harvested.

218 **Short-rotation coppice (SRC)** is defined as a monoculture plantation of fast-
219 growing woody species covering the entire management unit, with planting densities
220 of 8,000–20,000 cuttings·ha⁻¹. After each harvest the root system regenerates without
221 replanting. Rotation cycles are typically 3–7~years and total stand lifetime is 20–25~years
222 (Trnka et al., 2008; Faasch and Patenaude, 2012). SRCs are not AFSs in the narrow sense,
223 but it is helpful to benchmark biomass production.

224 **Short-rotation agroforestry systems (SRAFS)** integrate SRC-type tree strips
225 (typically 1–4 rows of the same fast-growing species like poplar or willow) into an oth-
226 erwise arable field in an alley-cropping arrangement. Crop production continues in the
227 inter-row strips (Huber et al., 2018; Graves et al., 2007). Thus, tree strips typically cover
228 10–30% of the total parcel area. Rotation lengths and total stand lifetime in SRAFS are
229 comparable to SRCs. In SRAFS all trees are effectively edge trees, exposed to higher light
230 and water availability than interior SRC trees. This boundary effect raises individual-tree
231 biomass accumulation but also intensifies competition with adjacent crop rows (Huber
232 et al., 2018).

233 **Long-rotation agroforestry systems (LRAFS)** use the same alley-cropping spa-
234 tial structure as SRAFS but with rotation cycles of 12–15~years or longer (Graves et al.,
235 2007; Nair, 1993). At this rotation length, individual trees develop substantial stem di-
236 ameters and the proportion of high-value timber increases markedly, enabling premium
237 material uses (veneer, sawlogs, engineered wood products) that are inaccessible in short-
238 rotation systems. Therefore, often timber-quality tree species (such as walnut, cherry,
239 oak, or high-grade poplar clones) are planted.

240 SRAFS and LRAFS are not clearly differentiated in practice. First, a clear cut-off age
 241 is hard to define and, more importantly, the intended use of AFS biomass is not always
 242 clear and can also change over time. Nonetheless, when establishing AFS, the structure
 243 of AFS and its intended use after harvest drives planting decisions and, subsequently,
 244 economic viability. Thus, in the present paper SRAFS and LRAFS are not considered as
 245 separate AFS systems, but the interplay of intended use, establishment, and harvesting
 246 decisions is analysed.

247 *2.2. Economic rationale of landowners*

248 The decision of a landowner to establish an AFS involves weighing substantial up-
 249 front costs and long-term opportunity costs against a diversified revenue stream. On the
 250 cost side, establishment requires site preparation, planting material, and planting labour,
 251 typically amounting to 1,500–3,500 €/ha for SRC or SRAFS (Faasch and Patenaude,
 252 2012; Testa et al., 2014). Recurrent harvest and refitting costs (machine hire, chipping,
 253 transport to roadside) add approximately 200–400 €/ha per rotation depending on stand
 254 density and equipment availability (Testa et al., 2014; Spinelli et al., 2009). During
 255 the rotation, maintenance costs of AFS arise on a yearly basis. Next to expenses for
 256 establishment, maintenance and harvesting, opportunity costs arise as no revenues from
 257 crops are generated on tree strips. In regions with fertile soils and high cereal prices,
 258 yearly crop revenues may sum up to 400–600 €/ha (Faasch and Patenaude, 2012; Graves
 259 et al., 2007). Thus, opportunity costs are often the dominant cost driver in SRAFS
 260 profitability analyses.

261 On the **benefit side**, the primary revenue of AFS is the sale of harvested woody
 262 biomass, whose magnitude depends critically on rotation length, species, and site pro-
 263 ductivity. For poplar-based SRAFS in Central Europe, typical yields range from 10
 264 to 25 t of dry matter biomass per ha for typical rotation lengths (Huber et al., 2018;
 265 Niemczyk and Thomas, 2021). Additionally, positive crop-yield effects in the inter-row
 266 strips of SRAFS and LRAFS may result. Tree rows act as windbreaks, reducing soil
 267 erosion and evapotranspiration; they provide partial shading that moderates heat stress
 268 during drought years; and their root systems may improve water retention in the top-
 269 soil (Graves et al., 2007; Grünewald et al., 2007). Empirical measurements in Central

European alley-cropping trials indicate that these microclimate effects can increase cereal yields in adjacent strips by 5–15% relative to open-field controls, partially or fully compensating the loss of arable area occupied by the tree strips (Graves et al., 2007). Beyond direct yield effects, AFS deliver broader ecosystem services (like soil organic matter accumulation, carbon sequestration, biodiversity enhancement) that may lead to agri-environment subsidies and carbon credits (Toensmeier, 2017; Faasch and Patenaude, 2012).

Nonetheless, economic attractiveness of AFS depends primarily on revenues of AFS biomass. Thereby, revenues are different for the types of biomass and in which value chain it is used. Often AFS biomasses are used energetically, i.e. for heat and power generation, or anaerobic digestion, which typically creates low prices per tonne of biomass. [REF] Alternatively, woody parts of the biomass (i.e., the stem and large branches) can also be used as pulp and paper grade material as well as feedstock for chemical industry or as timber achieving higher prices (Lamers et al., 2011) [EXTEND REFS]. Thus, fostering AFS establishment by maximizing economic returns from AFS biomass requires a strategic approach to product cascading that allocates different biomass fractions to the highest-value applications, while ensuring that the rotation length is aligned with the growth dynamics of the stand and the market demand for different biomass types (Lamers et al., 2011).

Thus, for making educated decisions on AFS establishment and harvesting, the expected biomass quantities at harvest for stem, branches, and residues need to be estimated. Thereby, the shares of the biomass types change with stand age. E.g.~the share of stem weight rises from roughly 55% at age 4 to over 75% at age 10 (Huber et al., 2018; Testa et al., 2014). Therefore, in Section 2.3 growth modelling approaches are reviewed that capture the age-dependent growth dynamics of different biomass types in AFS.

2.3. Biomass growth models

Reliable estimation of stand-level biomass quantities and their age-dependent composition is a necessary prerequisite for any strategic analysis of AFS-based supply chains. Individual-tree biomass is commonly approximated by species-specific allometric power laws relating shoot dry matter to stem base diameter, and these relationships have been

Table 1: Notation for the biomass growth and harvest yield models.

Symbol	Description
$M^{sl}(t)$	Total above- and belowground dry biomass per ha of AFS (t DM ha ⁻¹) at stand age t
$A(N)$	Stand-level Gompertz asymptote (t DM ha ⁻¹); density- and site-dependent
k	Gompertz growth-rate coefficient (yr ⁻¹)
t_0	Inflection age of stand biomass accumulation (yr)
N	Stand density (trees ha ⁻¹)
C_{site}	Site-quality constant (kg ha ^{β-1}); conservative: 4475, good site: 6471
β	Competition-density exponent; fitted $\hat{\beta} = 0.380$
ϕ_{ag}	Aboveground fraction of total stand biomass; $\phi_{\text{ag}} = 0.89$
$M^{ag}(t)$	Aboveground dry biomass per ha (t DM ha ⁻¹) at age t
$f_p(t)$	asymptotic fraction of AGB attributed to compartment $p \in \{s, b, r\}$ at age t
α_p, δ_p	Intercept and slope of the linear fraction model for compartment p
$q_p(t)$	Merchantable fraction of compartment p biomass at age t (logistic)
r_p	Logistic growth rate for merchantability of compartment p
$t_{50,p}$	Age at which 50% of compartment p biomass is merchantable (yr)
$Y_p(t)$	Merchantable dry biomass of compartment p per ha at harvest age t (t DM ha ⁻¹)
ω	Moisture content at felling (mass fraction); $\omega = 0.55$

calibrated for Central European poplar clones under SRC and SRAFS conditions (Huber et al., 2016, 2018). For supply chain planning, however, the relevant quantity is stand-level biomass per hectare over a multi-decade rotation horizon, which requires a temporal growth model that captures the characteristic sigmoidal accumulation trajectory of woody biomass. Therefore, a set of variables is used summarized in ??.

2.3.1. Stand-level growth model

Stand-level aboveground and belowground dry biomass per hectare, $M(t)$, accumulates in a right-skewed sigmoidal pattern with a relatively early inflection point, driven by rapid juvenile shoot growth followed by self-thinning and competitive deceleration as canopy closure intensifies (Niemczyk and Thomas, 2021; Testa et al., 2014). This trajectory is described by a Gompertz model:

$$M(t) = A(N) \cdot \exp(-\exp(-k \cdot (t - t_0))), \quad (1)$$

where t_0 is the age of maximum instantaneous biomass increment and k determines how quickly the stand approaches its site-specific asymptote $A(N)$. For Central European poplar under medium-rotation AFS management (10–20 yr), analysing empirical data from Huber et al. (2018), Niemczyk and Thomas (2021), and Jha (2018) yields parameter intervals of $k \in [0.17, 0.2]$ and $t_0 \in [9, 10]$ years, depending on local specifications of the AFS under study. Parameter t_0 indicates an upper bound on the optimal rotation age as growth slows down or diminishes entirely close to this age.

The asymptote $A(N)$ depends largely on planting density and can be modelled by a competition-density power law (Kira et al., 1961):

$$A(N) = C_{\text{site}} \cdot N^{1-\beta}, \quad (2)$$

where C_{site} encodes site quality, N indicates tree density (e.g. trees per hectare), and β is the competition exponent. Equivalently, the per-tree asymptote $A_{\text{tree}}(N) = A(N)/N = C_{\text{site}} \cdot N^{-\beta}$ decreases with density as individual trees have access to less growing space. Parameters C_{site} and β are highly site- and species-specific. For Poplar clones under European conditions, $\beta \in [0.3, 0.5]$ and $C_{\text{site}} \in [4, 6.5]$ (Niemczyk and Thomas, 2021, Kira et al. (1961)). Figure 1 shows asymptote functions according to (2) for advantageous and disadvantageous site conditions.

When assessing potential downstream application of AFS biomass, biomass fraction are to be defined meeting the requirements of downstream consumers. E.g. for timber and biochemical applications, stem diameters of AFS trees need to exceed a minimum threshold in order to qualify as a suitable feedstock. In the following three biomass fractions are distinguished: stems, branch wood, and residue. The stem fraction consists of stems with a diameter of at least 15 cm, while branch wood requires a diameter of at least 7 cm. The residue fraction comprises the smaller parts of the tree. To subdivide the total AFS biomass modelled by (1) into the three fractions depending on tree age, a logistic growth model is used:

$$q_p(t) = \frac{f_p}{1 + \exp(-r_p \cdot (t - t_{50,p}))}, \quad (3)$$

where $t_{50,p}$ is the age at which 50% of compartment p biomass surpasses the diameter threshold and f_p denotes the asymptotic share of component p for mature trees. Using empirical data from Civitarese et al. (2019), Jha (2018) and Niemczyk and

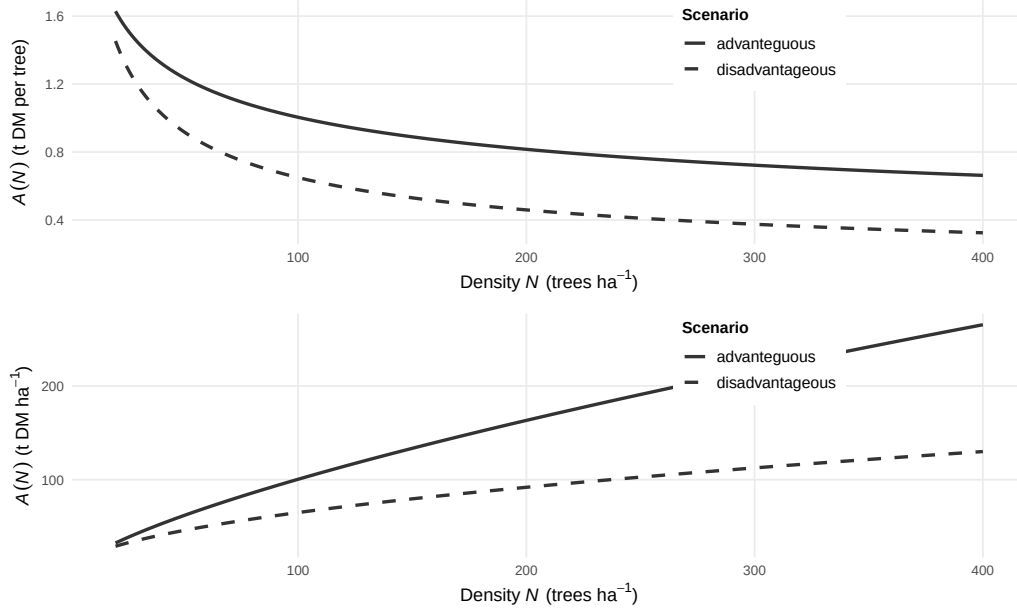


Figure 1: Tree-level and stand-level Gompertz asymptote function $A(N)$ of planting density for the advanteguous ($N = 4$, $\beta = -0.3$) and disadvantageous ($N = 6.5$, $\beta = -0.5$) scenarios.

339 Thomas (2021), $r_{stem} = 0.467, \text{yr}^{-1}$, $t_{50,stem} = 8.19$ years, and $f_{stem} = 0.75$ is estimated
 340 for the stem fraction (threshold $d > 15$ cm) and $r_{bran} = 0.698 \text{ yr}^{-1}$, $t_{50,bran} = 7.55, \text{yr}$,
 341 and $f_{bran} = 0.15$ for the branch fraction (diameter at least 7 cm at insertion). Figure 2
 342 illustrates the development of the fraction shares over stand age.

343 Combining equations (1)–(3), the dry biomass yield of fraction p per hectare at harvest
 344 age t is:

$$\eta_p(t) = q_p(t) \cdot M(t), \quad (4)$$

345 with all non-merchantable fractions aggregated into the residue fraction. Fresh-weight
 346 yields at felling are obtained from dry matter yields via $\eta_p^{\text{fw}} = \eta_p / (1 - \omega)$, where the
 347 moisture content at felling $\omega = 0.55$ is taken from Civitarese et al. (2019). Figure 3
 348 shows the fractions' stacked biomass quantities $\eta_p(t)$ depending on stand age compared
 349 with empirical observations from Jha (2018)

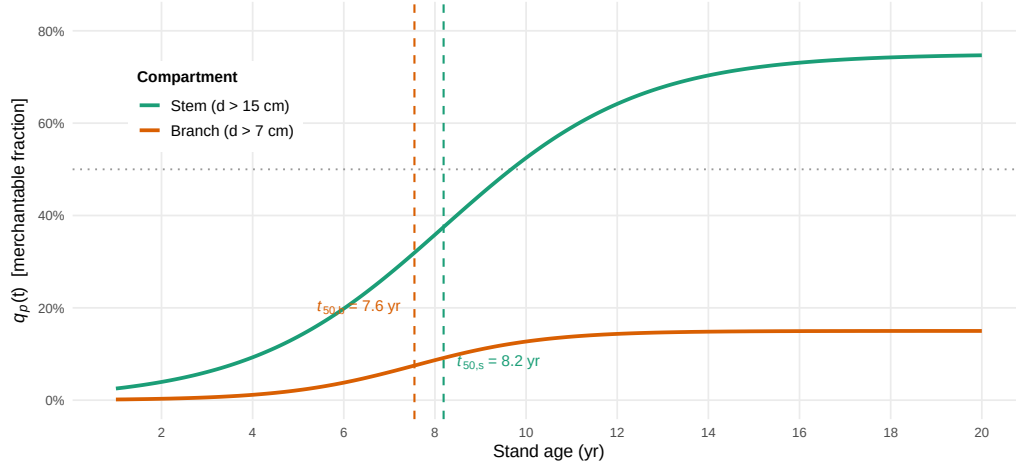


Figure 2: Logistic diameter-class merchantability functions $q_p(t)$ for stem ($d > 15$ cm, green) and branches ($d > 7$ cm, orange); the 50% threshold ages t_{50} are indicated by dashed vertical lines.

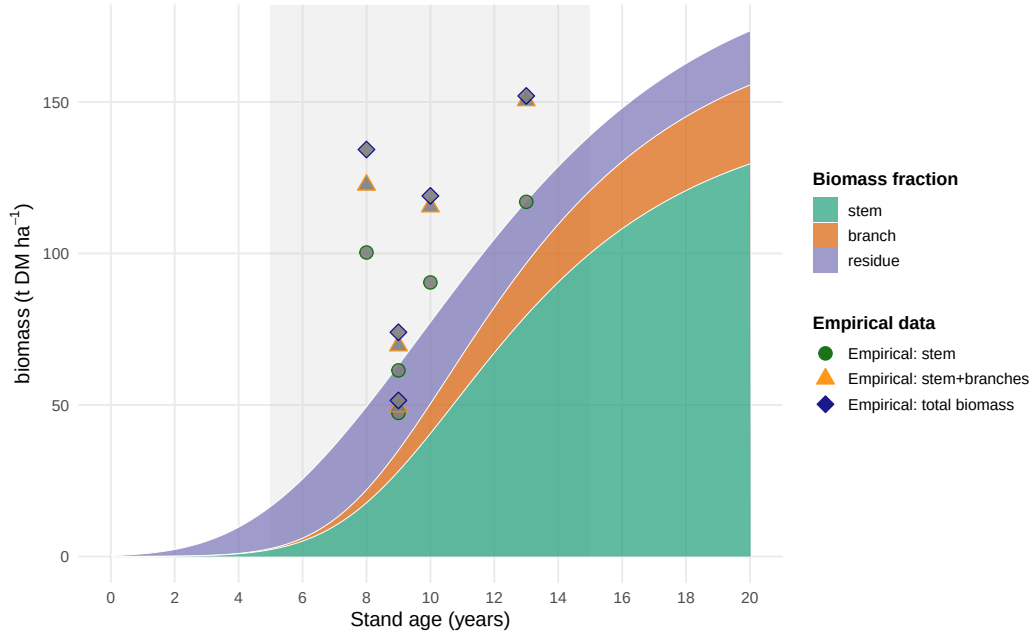


Figure 3: Stand-level aboveground biomass components for poplar under AFS management with $N = 250$ trees ha^{-1} . Empirical AGB observations compiled from Jha (2018), Civitarese et al. (2019), and Niemczyk and Thomas (2021). Grey band: typical medium-rotation harvest window (5–15 years).

350 2.4. Biomass supply chain design

351 The design and planning of biomass supply chains has attracted substantial research
352 attention over the past two decades, driven by the need to ensure cost-efficient and
353 sustainable feedstock provision for bioenergy and biorefinery applications. Several sys-
354 tematic reviews provide comprehensive overviews of this literature. Cambero and Sowlati
355 (2014) survey economic, social, and environmental assessment and optimisation studies
356 for forest biomass supply chains, identifying MILP as the dominant modelling approach
357 and noting a growing trend towards multi-objective formulations integrating life cycle
358 assessment.

359 Yue et al. (2014) review biomass-to-bioenergy and biofuel supply chain models with
360 a focus on multi-scale modelling, uncertainty treatment, and sustainability metrics, and
361 conclude that the coupling of upstream feedstock dynamics with downstream network de-
362 sign remains an underexplored area. Malladi and Sowlati (2018) survey logistics-specific
363 features of biomass supply chain models—seasonal availability, moisture content degra-
364 dation, preprocessing steps—and highlight that most models treat biomass as a homo-
365 geneous commodity, neglecting quality differentiation. Zahraee et al. (2020) provide a
366 recent meta-review of 140+ studies, confirming that cost minimisation is still the domi-
367 nant objective, and that multi-product cascading formulations are rare.

368 The structure of biomass supply chain models typically encompasses three decision
369 layers: (i) strategic network design (facility location, capacity sizing, technology selec-
370 tion), (ii) tactical planning (harvest scheduling, seasonal flows, inventory), and (iii) oper-
371 ational routing. The following paragraphs discuss key individual contributions and their
372 specific methodological advances.

373 Ekşioğlu et al. (2009) develop one of the earliest large-scale MILP models for biomass-
374 to-biorefinery supply chain design, integrating facility location, capacity sizing, and mul-
375 timodal transport for lignocellulosic feedstocks. Their model minimises total system cost
376 and introduces binary facility-opening variables that have since become standard in the
377 field. A key limitation, however, is that biomass supply is treated as an exogenous input,
378 so feedstock availability is not endogenised as a function of land-use or growth decisions.
379 Mansoornejad et al. (2013) extend the strategic design perspective to forest biorefiner-
380 ies by integrating product portfolio design with supply chain configuration in a single

MILP. Their model explicitly accounts for product conversion efficiencies along different processing pathways, enabling joint optimisation of process technology selection and logistics.

De Meyer et al. (2014) introduce the OPTIMASS framework, a generic MILP for biomass-based supply chain optimisation that explicitly models product quality cascades: higher-quality biomass classes can substitute for lower-quality demands downstream, whereas the reverse is infeasible. This cascade hierarchy, formalised through ordered product sets, is particularly relevant for woody biomass where stem, branch, and residue fractions command different market prices. The companion t-OPTIMASS extension (De Meyer et al., 2016) incorporates temporal dynamics by explicitly representing biomass growth and regeneration over multiple periods, enabling simultaneous optimisation of harvest timing and network flows. However, in both OPTIMASS formulations the growth dynamics are represented as exogenous time-series rather than as age-structured stand models, so rotation-length decisions and age-dependent biomass quality are not endogenised. Arabi et al. (2019) demonstrate multi-period MILP extensions for bio-based supply chains with production dynamics, but focus on microalgae rather than woody biomass and do not address product quality cascades.

Sharma et al. (2013) identify supply-side uncertainty (yield variability, seasonal availability, moisture content) as the most critical source of risk in biomass supply chains. In response, a strand of literature has developed stochastic and robust optimisation extensions. Zahraee et al. (2020) document that two-stage stochastic MILP and robust optimisation approaches now account for roughly 30% of the modelling literature, with biomass yield uncertainty and price volatility as the dominant stochastic parameters.

Biomass supply chain research focusing specifically on agroforestry or SRC contexts is comparatively sparse. Espinoza et al. (2017) note that most supply chain models assume continuous feedstock availability and do not represent the periodic harvest cycles characteristic of coppice systems. Lamers et al. (2011) analyse feedstock design principles for lignocellulosic supply chains and argue that the allocation of different biomass fractions to valorisation pathways—product cascading—is a key lever for economic viability, yet is rarely optimised jointly with network design decisions. The model developed in Section 3 of this paper directly addresses this gap by endogenising stand age dynamics through

412 binary age-lag variables and coupling component-specific yield coefficients with a product
 413 quality cascade.

414 Table 2 summarises the key modelling features of the reviewed contributions.

Table 2: Key modelling features of selected biomass supply chain design studies.

Study	Objective	Multi-product	Quality cascade	Age dynamics	Uncertainty	Level
Eksioglu et al. (2009)	Cost min.	—	—	—	—	Strategic
Sharma & Taaffe (2013)	Cost min.	Partial	—	—	—	Strategic/Tactical
Mansoornejad et al. (2013)	Profit max.	✓	—	—	—	Strategic
Cambero & Sowlati (2014)	Cost/GHG/jobs	—	—	—	Stochastic	Strategic
Yue et al. (2014)	Cost/GHG	✓	—	—	—	Multi-scale
De Meyer et al. (2015)	Cost min.	✓	✓	Exogenous	—	Strategic/Tactical
De Meyer et al. (2016)	Cost min.	✓	✓	Exogenous TS	—	Multi-period
Lamers et al. (2015)	Cost/quality	✓	Partial	—	Scenario	Strategic
Espinoza et al. (2017)	Sustainability	✓	—	—	Scenario	Strategic
Malladi & Sowlati (2018)	Cost min.	Partial	—	—	—	Tactical/Oper.
Arabi et al. (2019)	Profit max.	✓	—	Exogenous	—	Multi-period
Zahraee et al. (2020)	Multi-obj.	✓	—	—	Stochastic	Strategic/Tactical
This paper	NPV max.	✓	✓	Endogenous	Scenario	Strategic/Multi-period

415 3. MILP Model for Agroforestry Supply Chain Design

416 Building on the biomass growth models introduced in Section 2.3 and the supply
 417 chain design literature reviewed in Section 2.4, this section describes the AFS supply
 418 chain design problem (AFS-SCD), a mixed-integer linear programming (MILP) model
 419 for the integrated design and operation of an agroforestry biomass supply chain with
 420 multiple AFS biomass types (i.e., stem, branch, and residue fractions) used as feedstocks
 421 for potential consumers in chemical, pulp and paper as well as energy industry.

422 3.1. Sets, Indices, and Time Structure

423 The model considers a set of agroforestry sites $\mathcal{I}$, storage/pre-treatment facilities
 424 $\mathcal{J}$, consumer sites $\mathcal{K}$, and biomass types $\mathcal{P} = \{stem, branches, residues\}$, whose growth
 425 models are outlined above. Time is discretised into annual periods $t \in \mathcal{T} = \{1, \dots, T_{\max}\}$.
 426 To reduce complexity, reflect legal definitions of SRAFS and LRAFS as well as discard im-
 427 plausible options (e.g. extremely long rotation cycles), $A^{\min}$ and $A^{\max}$ define minimum and
 428 maximum stand ages. Thus, harvest are possible in periods $\mathcal{T}^{\text{harv}} = \{A^{\min} + 1, \dots, T_{\max}\}$.
 429 To consistently model establishment and consecutive harvest decisions, the following arc
 430 sets are defined: $\mathcal{S}^{\text{est}}$ defines potential establishments of AFS. If an AFS is established
 431 in period $t \in \mathcal{T}$, arc $(0, t)$ is selected. Harvest set $\mathcal{S}^{\text{harv}}$ summarizes all potential consec-
 432 utive harvest periods within the age interval $[A^{\min}, A^{\max}]$. I.e., if an AFS is established
 433 or harvested in period s and next harvest is in period t , arc (s, t) is selected. Finally,
 434 if there is no subsequent harvest after period t , the AFS is terminated by selecting arc
 435 $(t, T^{\max} + 1)$. Termination arcs are summarized in set $\mathcal{S}^{\text{term}}$. All arc sets are formally
 436 defined as follows:

$$\begin{aligned}\mathcal{S}^{\text{est}} &= \{(0, t) \mid t \in \{1, \dots, T^{\max} - A^{\min}\}\}, \\ \mathcal{S}^{\text{harv}} &= \{(s, t) \mid s, t \in \mathcal{T} \wedge t - s \in \{A^{\min}, \dots, A^{\max}\}\}, \\ \mathcal{S}^{\text{term}} &= \{(s, T^{\max} + 1) \mid s \in \{A^{\min} + 1, \dots, T_{\max}\}\}, \\ \mathcal{S} &= \mathcal{S}^{\text{est}} \cup \mathcal{S}^{\text{harv}} \cup \mathcal{S}^{\text{term}}.\end{aligned}$$

437 Figure 4 illustrates this network structure of all arc sets for $T = 8$, $A^{\min} = 3$, $A^{\max} =$
 438 5.

439 3.2. Decision Variables

440 Temporal flow Variables z_{ist} indicate on which quantity of the area of site i an an
 441 AFS is operated between $(s, t) \in \mathcal{S}$. Depending on the arc type, this implies establish-
 442 ment, harvest, or termination. Selected arcs build a network flow over the complete
 443 planning horizon from $t = 0$ to $T^{\max} + 1$. Figure 5 illustrates a simple network flow with
 444 establishment of an AFS in period 1 and harvests in periods 5 and 8.

445 Spatial flow variables X_{ijpt} and $X_{jkpp't}$ represent transport of products from AFS
 446 sites to storage/pre-treatment facilities and from there to consumers, respectively, while

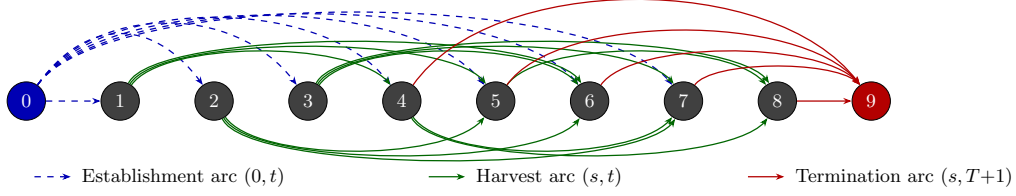


Figure 4: Network structure of set $\mathcal{S}$ for $T = 8$, $A_{\min} = 3$, $A_{\max} = 5$. Dashed blue arcs: establishment arcs $(0, t)$, $t \in \{1, \dots, T - 1\}$. Solid green arcs above: harvest arcs (s, t) with odd s ; below: harvest arcs with even s . Solid red arcs: termination arcs $(s, T + 1)$, $s \in \{A_{\min} + 1, \dots, T\}$.




Figure 5: Example of a feasible path through the network for $T = 8$, $A_{\min} = 3$, $A_{\max} = 5$: establishment in period 1, harvests in periods 5 and 8, termination at $T + 1$.

447 S_{jpt} captures end-of-period inventory at facility j . Table 3 summarises all sets, decision
 448 variables, and parameters used in the MILP formulation, while η_{pa} refers to (4).

449 3.3. Objective Function

450 As discussed in Section 2.1, the economic attractiveness of AFS supply chains is mod-
 451 elled from a global perspective taking into account all processes, activities, and partici-
 452 pants involved in finally serving customer markets with AFS-based feedstocks. Therefore,
 453 revenues for the different biomass fractions and are weighed against costs occurring at
 454 all value-adding stages of the supply chains. Revenues created by selling AFS-based
 455 feedstocks to different industrial consumers are counterweighted by establishment, op-
 456 portunity, harvest, transport, and storage costs of landowners, agricultural firms as well
 457 as biomass logistics companies. The model therefore maximises total profit of all partic-

Table 3: Notation for the MILP model.

Sets & Indices	
$i \in \mathcal{I}$	Agroforestry sites
$j \in \mathcal{J}$	Storage / pre-treatment facilities
$k \in \mathcal{K}$	Consumer sites
$p \in \mathcal{P}$	Product types (stem, branches, residues)
$(p, p') \in \mathcal{Q}$	Admissible product-substitution pairs (quality cascade)
$\mathcal{T} = \{1, \dots, T\}$	Planning periods (years)
$\mathcal{T}^{\text{harv}} = \{A^{\min} + 1, \dots, T\}$	Feasible harvest periods
$\mathcal{S}^{\text{est}} = \{(0, t) \mid t \in \{1, \dots, T - A^{\min}\}\}$	Establishment arcs: dummy source to period t
$\mathcal{S}^{\text{harv}} = \{(s, t) \mid s, t \in \mathcal{T}, t - s \in \{A^{\min}, \dots, A^{\max}\}\}$	Harvest cycles within age-lag bounds
$\mathcal{S}^{\text{term}} = \{(s, T + 1) \mid s \in \{A^{\min} + 1, \dots, T\}\}$	Termination arcs to dummy sink $T + 1$
$\mathcal{S} = \mathcal{S}^{\text{est}} \cup \mathcal{S}^{\text{harv}} \cup \mathcal{S}^{\text{term}}$	Age-lag arc set (establishment $\cup$ harvest $\cup$ termination)
Decision Variables	
$z_{ist} \in \{0, \text{AREA}_i\}$	Area of site i with AFS operation between s and t
$X_{ijpt} \geq 0$	Transport flow (t) of p from site i to facility j in t
$X_{jkpp't} \geq 0$	Flow of p from facility j to consumer k satisfying demand p' in t
$S_{jpt} \geq 0$	Inventory (t) of product p at facility j end of period t
Parameters	
T	Length of planning horizon (years)
$A^{\min}, A^{\max}$	Minimum / maximum stand age at harvest (years)
AREA_i	Area of site i (ha)
η_{pa}	Yield coefficient (t/ha) of fraction p at stand age a , derived from (4)
R_{kp}	Revenue (€/t) for product p at consumer k
C_i^{est}	Establishment cost (€/ha) at site i
C_i^{opp}	Annual opportunity cost (€/ha) at site i
C_i^{harv}	Harvest & refitting cost (€/ha) at site i
$c^{\text{tr-raw}}$	Transport cost rate (€/t km) for raw biomass
$c^{\text{tr-pre}}$	Transport cost rate (€/t km) for pre-treated biomass
c_j^{stor}	Storage holding cost (€/t) at facility j
d_{ij}, d_{jk}	Distance (km) between nodes
$\text{CAP}_j^{\text{stor}} / \text{CAP}_j^{\text{proc}}$	Storage and processing capacity (t) at facility j
D_{kpt}^{max}	Maximum demand (t) of fraction p at consumer k in period t

458 inputs in the AFS supply chain over the planning horizon as follows:

$$\begin{aligned}
\max Z = & \sum_{k \in \mathcal{K}} \sum_{p \in \mathcal{P}} R_{kp} \cdot \sum_{j \in \mathcal{J}} \sum_{(p', p) \in \mathcal{Q}} \sum_{t \in \mathcal{T}} X_{jkp'pt} \\
& - \sum_{i \in \mathcal{I}} C_i^{\text{est}} \cdot \sum_{(0, t) \in \mathcal{S}^{\text{est}}} z_{i0t} \\
& - \sum_{i \in \mathcal{I}} (C_i^{\text{main}} + C_i^{\text{opp}}) \cdot (t - s) \cdot \sum_{(s, t) \in \mathcal{S}^{\text{harv}}} z_{ist} \\
& - \sum_{i \in \mathcal{I}} C_i^{\text{harv}} \cdot \sum_{(s, t) \in \mathcal{S}^{\text{harv}}} z_{ist} \\
& - \sum_{i \in \mathcal{I}} \sum_{j \in \mathcal{J}} \sum_{p \in \mathcal{P}} \sum_{t \in \mathcal{T}} c_p^{\text{tr-raw}} \cdot d_{ij} \cdot X_{ijpt}
\end{aligned} \tag{5}$$

Here, R_{kp} are product- and consumer-specific revenues for each ton of biomass fraction (€/t). The opportunity cost term penalises the land use when AFS are established. Thereby, c_i^{opp} can be negative or positive depending on the site-specific conditions. It comprises effect of lost field crop revenues due to AFS as well as higher yields of remaining field crop areas e.g. due to wind and water erosion protection by AFS. While the assessment of lost field crop revenues is usually well predictable, the economic evaluation of positive ecological effects of AFS (e.g. on neighboring crop yields) is more difficult. Thus, c_i^{opp} can also contain regulatory subsidies to support establishing and maintaining AFS. Transport cost terms mirror the two-stage flow structure of the AFS supply chain with differentiated rates for raw and pre-treated biomass depending on the biomass type. Cost rates differ because as e.g. the density and water content of the shipped biomasses differ or because specialized equipment (e.g. for log transports) is used [REFERENCES]. Moreover, site-specific establishment cost for planting the AFS trees is considered, next to yearly maintenance costs and harvesting cost. All these costs scale with the size of a site ($AREA_i$) measured in hectar. Maintenance cost comprise e.g. costs for trimming, replanting, and pruning unnecessary shoots. Storage costs are considered if biomasses are stored for more than a year to compensate direct costs (e.g. for storage site maintenance) but primarily opportunity cost due to potential material losses and capital commitment. The usual case is that AFS are harvested at the beginning of a year. Harvested biomass dry during spring and summer such that the biomasses can be used in autumn or winter the same year. As drying is necessary for most industrial applications and beneficial for transport economics, drying storage in the year of harvest is not associated with additional cost.

3.4. Constraints

Constraints (6) limit each site to at most one establishment decision over the planning horizon. Constraints (7) enforce flow conservation in each period. If an activity in period $t \in \mathcal{T}$ takes place, there needs to be a preceeding activity (harvest or establishment) and a succeeding activity (harvest or termination). This way, (7) guarantee valid (possibly empty) activity paths over the complete time horizon for each site. Constraints (8) links the binary harvest-cycle variables to physical yield quantities via the age-dependent yield coefficients $\eta_{p(t-s)}$. These coefficients are pre-computed by evaluating the component-

specific Gompertz functions (??) and (??) at stand age $a = t - s$ and scaled by site area $AREA_i$. Thus, implicitly we assume constant yields per hectare for each site i . Note that this simplification can be dropped and site-specific yields $\eta_{ip(t-s)}$ could be introduced without increasing numerical complexity of the AFS-SCD. Constraints (??)–(9) link harvest quantities to transport flows and ensure inventory balance at each facility, following the multi-period network-flow structure of OPTIMASS (De Meyer et al., 2014, 2016). Thereby, harvest quantities can be smaller than available AFS biomasses allowing partial harvesting. Constraints (10)–(11) enforce storage and processing capacity limits at each facility j . Constraints (12) implement product usage at multiple consumption sites k . Thereby, $(p', p) \in \mathcal{Q}$ defines a product mapping allowing high-quality product p' (e.g. stems) satisfying demand of a lower-quality products p up to maximum demand $D_{kpt}^{\max}$. This way, the cascading principle is operationalized as a central economic rationale.

$$\sum_{(0,t) \in \mathcal{S}^{est}} z_{i0t} \leq AREA_i \quad \forall i \in \mathcal{I} \quad (6)$$

$$\sum_{(s,t) \in \mathcal{S}} z_{ist} = \sum_{(t,u) \in \mathcal{S}} z_{itu} \quad \forall i \in \mathcal{I}, t \in \mathcal{T} \quad (7)$$

$$\sum_{j \in \mathcal{J}} X_{ijpt} \leq \sum_{(s,t) \in \mathcal{S}^{harv}} \eta_{p(t-s)} \cdot z_{ist} \quad \forall i \in \mathcal{I}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (8)$$

$$S_{jpt} = S_{jp,t-1} + \sum_{i \in \mathcal{I}} X_{ijpt} - \sum_{k \in \mathcal{K}, (p,p') \in \mathcal{Q}} X_{jkpp't} \quad \forall j \in \mathcal{J}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (9)$$

$$\sum_{p \in \mathcal{P}} S_{jpt} \leq CAP_j^{stor} \quad \forall j \in \mathcal{J}, t \in \mathcal{T} \quad (10)$$

$$\sum_{i \in \mathcal{I}, p \in \mathcal{P}} X_{ijpt} \leq CAP_j^{proc} \quad \forall j \in \mathcal{J}, t \in \mathcal{T}^{harv} \quad (11)$$

$$\sum_{j \in \mathcal{J}, (p',p) \in \mathcal{Q}} X_{jkp'pt} \leq D_{kpt}^{\max} \quad \forall k \in \mathcal{K}, p \in \mathcal{P}, t \in \mathcal{T}^{harv} \quad (12)$$

$$z_{ist}, X_{ijpt}, X_{jkp'pt}, S_{jpt} \geq 0 \quad \forall i, j, k, p, p', t \quad (13)$$

The yield coefficients η_{pa} in (8) are the critical bridge between the stand-level growth model of Chapter~2 and the supply chain optimisation. For stand age $a = t - s$ and

product component p , they are computed as:

$$\eta_{pa} = f_p(a) \cdot M^{sl}(a) = \frac{h_p(a)}{\sum_{p'} h_{p'}(a)} \cdot a^\infty \cdot e^{-e^{-b'1} \cdot (a-\tau)}, \quad (14)$$

where $M^{sl}(a)$ follows from (??) and $f_p(a)$ follows from (??). For poplar clone Max~3 under SRAFS conditions, the component-specific Gompertz parameterisations from Section 2.3 imply that $\eta_{stem,a}$ rises steeply between ages~4 and 10, while $\eta_{branch,a}$ and $\eta_{residue,a}$ plateau earlier, as illustrated in Figure ?? . This age-dependence of product fractions is the core mechanism through which rotation-length decisions — governed by $A^{\min}$ and $A^{\max}$ and the arc set $\mathcal{S}$ — determine achievable product portfolios and, hence, revenues in the objective function (5).

4. Case Study

The proposed MILP model is intended to support the design of agroforestry biomass supply chains for cleaner production in specific regional contexts. In a forthcoming case study, we focus on poplar-based alley-cropping systems in a temperate European setting, informed by empirical data from SRAFS trials in Southern Germany and SRC plantations in Central Europe (Huber et al., 2018; Trnka et al., 2008; Testa et al., 2014).

4.1. Study Region and Supply Chain Configuration

The proposed AFS-SCD model is instantiated on a real-world biomass supply chain located in the tri-state region of Saxony-Anhalt, northern Thuringia, and northern Saxony, Germany (Figure 6). This region combines the highest density of registered short-rotation coppice (SRC) Feldblöcke in eastern Germany with a cluster of major wood-processing industries that collectively represent one of the largest forest-based biomass demand centres in Central Europe. The spatial extent of the study region covers approximately 250×200 km, with road distances between potential KUP sites and consumer locations ranging from under 10 km to over 180 km.

The supply chain comprises three node types: (i) KUP production sites $\mathcal{I}$, (ii) pre-treatment and intermediate storage facilities $\mathcal{J}$, and (iii) consumer sites $\mathcal{K}$. Candidate KUP sites are drawn from the official Feldblock register of Saxony-Anhalt, filtered to parcels with a minimum area of 1 ha and classified as potentially suitable for SRC

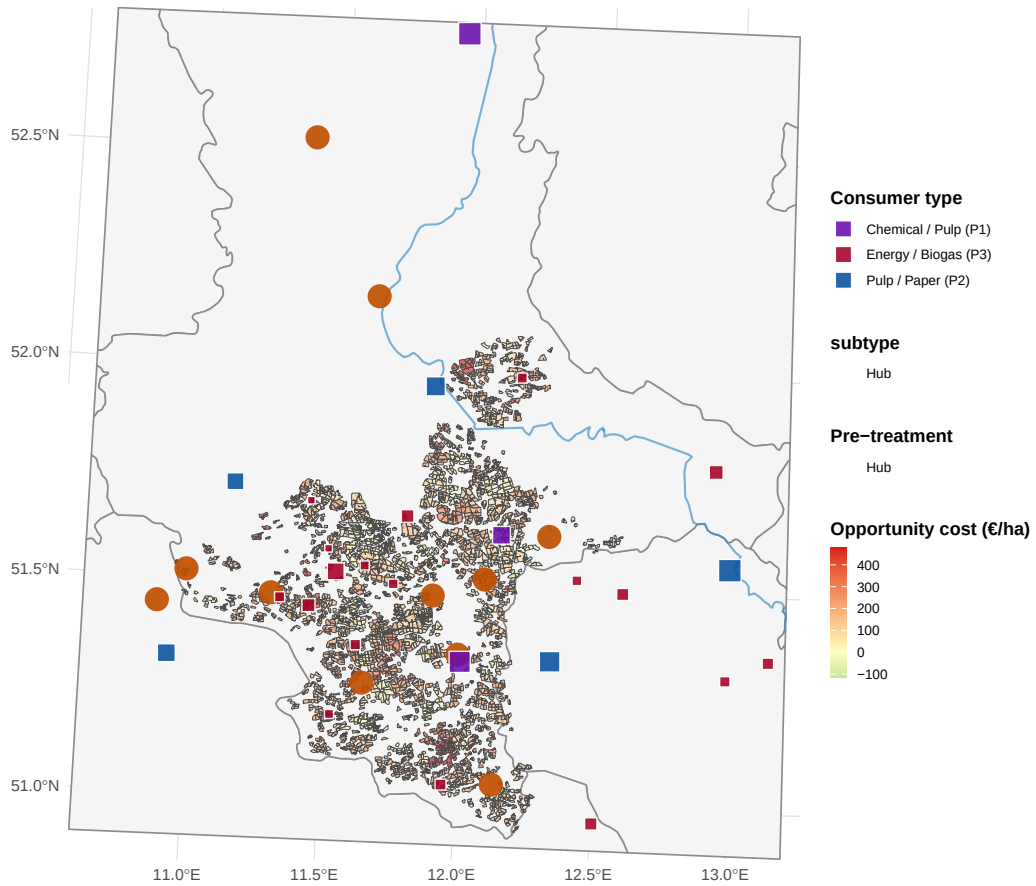


Figure 6: AFS supply chain network in Saxony-Anhalt. Grey lines: German federal state boundaries. Blue lines: major rivers. Coloured polygons: potential KUP/AFS sites grouped by HAC super-site (colours encode cluster membership; no legend). Orange symbols: pre-treatment facilities (circle = sawmill, triangle = logistics hub, size proportional to processing capacity). Coloured squares: consumer sites (violet: P1 chemical/pulp, blue: P2 pulp/paper, red: P3 energy/biogas, size proportional to total demand).

under the InVeKoS land-use scheme. Following the two-stage spatial clustering procedure described in Section 4, the $|\mathcal{I}| = 2239$ raw Feldblöcke are grouped into K super-sites using DBSCAN ($\varepsilon = 15$ km, $minPts = 3$) and Ward.D2 hierarchical clustering (maximum within-cluster radius 15 km), yielding a computationally tractable MILP instance while preserving the total eligible area. The HAC cluster assignments, visible as distinct colour zones in Figure 6, confirm a spatially coherent partitioning: dense KUP corridors along the Elbe and Saale floodplains form contiguous super-sites, while isolated parcels in the Harz foothills constitute smaller or singleton clusters.

Two types of intermediate infrastructure nodes are considered: conventional sawmills and logistics hubs. Sawmills perform primary mechanical processing (debarking, chipping) and can serve product streams P1 and P2; logistics hubs serve as consolidation and temporary storage points for all three product grades and are characterised by lower capital intensity but limited processing capacity. The $|\mathcal{J}| = 11$ candidate storage/pre-treatment locations are sourced from publicly registered forestry enterprises and existing logistic nodes in the study region. Road distances d_{ij} (site i to storage j) and d_{jk} (storage j to consumer k) are computed via the OSRM open-source routing engine using the German road network, providing realistic transport cost estimates that are embedded directly in the MILP objective.

4.2. Consumer Demand and Product Classification

Nine consumer sites are included in the base case ($|\mathcal{K}| = 9$), covering the full quality cascade from high-value chemical/pulp applications down to energy use (Table 4). Consumer demands $D_{kpt}^{\max}$ are derived from publicly reported annual throughput figures, production capacities, and regulatory filings, and are held constant across periods ($D_{kpt}^{\max} = D_{kp}^{\max} \forall t \in \mathcal{T}$) to reflect stable long-term offtake contracts.

Three biomass product grades are distinguished, reflecting the cascading-use principle embedded in the AFS-SCD objective:

- **P1 – Chemical/pulp grade** ($p = 1$): long-fibre hardwood chips suitable for chemical pulping and biorefinery conversion. Dominated by Mercer Stendal GmbH (Arneburg, 1{,}500 kt/yr) and Zellstoff Rosenthal/Mercer (Blankenstein, 1{,}000 kt/yr), which together account for 403% of total P1 demand. UPM Biochemicals

(Leuna) contributes 500 kt/yr of high-purity beech-fraction demand for biochemical conversion. Gate prices for P1 range from 80 to 120 €/t wood input.

- **P2 – Sawlog/pulpwood grade** ($p = 2$): roundwood and chipped material suitable for mechanical processing in sawmills. Demand is distributed across six smaller facilities with individual annual demands of 5–300 kt/yr. Gate prices range from 55 to 75 €/t.
- **P3 – Energy/pellets grade** ($p = 3$): residual wood fractions (chips, bark, off-cuts) used for heat and electricity generation or pellet production. This grade absorbs material that cannot meet P1 or P2 quality thresholds, operationalising the cascade constraint in the MILP. Gate prices range from 30 to 40 €/t.

The demand derivation follows a three-step procedure. First, publicly available capacity data (kt wood input per year) are collected for each facility from official sources, industry reports, and corporate disclosures (Mercer Stendal GmbH, 2024; UPM Biochemicals, 2024). Second, the total annual capacity is assigned to the product grade that corresponds to the primary feedstock of each facility (P1 for chemical/biorefinery processes, P2 for mechanical sawmilling, P3 for thermal conversion and pellet lines). Third, a minor P3 component is added to sawmill facilities to capture by-product streams (bark, sawdust), consistent with observed industrial practice. The resulting demand matrix $D_{kp}^{\max}$ (kt/yr) is shown in Figure 7 and summarised in Table 4. Aggregate demand across the study region totals 620.5 kt/yr for P1, 410 kt/yr for P2, and 131.7 kt/yr for P3.

4.3. MILP Model Parameters

Table 5 summarises all scalar parameters of the AFS-SCD instance. The planning horizon covers $|\mathcal{T}| = 15$ periods, corresponding to one full poplar rotation (years 1–15), with a minimum harvest age $a^{\min} = 4$ and maximum productive stand age $a^{\max} = 15$ (Lehmkuhl et al., 2023). Biomass yield functions η_{pa} (odt ha⁻¹ yr⁻¹) follow the age-structured Gompertz profile calibrated in Section 2.3, where distinct yield curves are assigned to each product grade to reflect the fraction of stem, branch, and foliage biomass that qualifies under each quality threshold.

Transport costs are disaggregated into two components reflecting the two-echelon logistics structure. Raw material transport from site i to pre-treatment facility j incurs

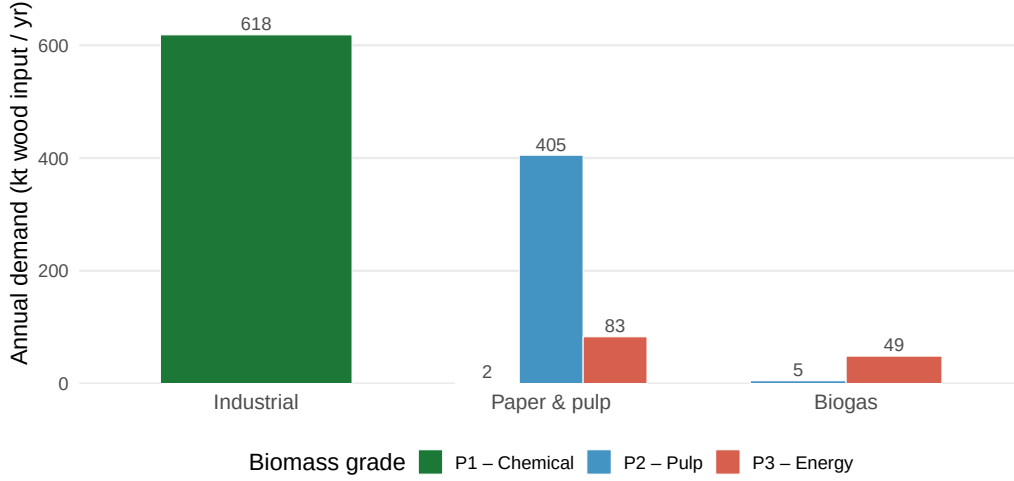


Figure 7: Total biomass demand by consumer type and grade (P1 chemical, P2 pulp & paper, P3 energy/biogas). Bars show aggregated annual demand in kt wood input per year across all individual plants within each consumer type.

a variable cost $c^{tr-raw} \cdot d_{ij}$ ($\text{€ t}^{-1} \text{ km}^{-1}$), while processed material transport from j to consumer k is costed at $c^{tr-pre} \cdot d_{jk}$. The pre-treatment rate c^{tr-pre} is set lower than c^{tr-raw} to reflect the higher load density and standardised packaging of chipped and pelletised material compared to loose roundwood. An opportunity cost parameter c^{opp} ($\text{€ ha}^{-1} \text{ yr}^{-1}$) accounts for foregone agricultural revenue on converted parcels, calibrated to the average arable land rental rate in Saxony-Anhalt (Statistisches Bundesamt (Destatis), 2023). Storage capacity at each facility j is bounded by $\bar{S}_j$, and processing capacity by $\bar{C}_j$ (kt yr^{-1}), both drawn from publicly available facility data.

4.4. Optimization results

The AFS-SCD model is solved for the Saxony-Anhalt base-case instance described in Section 4. All results presented in this section refer to the base-case parametrisation summarised in Table 5. The model selects a subset of KUP super-sites for establishment and identifies the optimal harvest schedule, intermediate facility utilisation, and product allocation across the 15-period planning horizon.

Figure 8 shows the spatial configuration of the optimal supply chain. Active super-sites are concentrated in the Elbe and Saale floodplains, where high biomass yields and proximity to major processing facilities create the most favourable economics. Sites in

the Harz foothills and peripheral areas with high opportunity costs are not selected. The pie charts overlaid on each active site indicate the product-mix composition: sites closer to P1 consumers (chemical/pulp grade) allocate a larger stem fraction, while more remote sites rely more heavily on P3 (energy) grade biomass.

Figures ?? and ?? report the biomass flows over the planning horizon. Total annual biomass throughput rises steeply in the first five periods as newly established sites reach minimum harvest age, stabilises during the middle of the horizon, and undergoes a partial decline towards the end as rotation cycles exhaust the planning window. The product cascade is clearly visible: stem biomass (P1) dominates the early harvest periods when young stands deliver the highest merchantable stem fraction, while branch and residue shares increase as stands mature and are harvested at longer rotation lengths.

The distribution of harvesting cycle lengths at active sites is illustrated in Figure ?. The majority of harvest events occur at stand ages between the minimum age $a^{\min} = 4$ years and approximately 8–10 years, reflecting the trade-off between cumulative yield growth and the opportunity cost of delayed harvesting. A secondary peak at longer rotation lengths (12–15 years) corresponds to sites with lower opportunity costs and higher P1 demand in their vicinity.

Figure ?? presents the aggregate cost–profit waterfall over the full horizon. Total revenue is dominated by P1 deliveries to the two large pulp mills. Opportunity costs and transport costs are the two largest cost drivers; establishment costs are one-time and comparatively modest. The site-level revenue–cost decomposition in Figure ?? confirms that profitability is highly heterogeneous: a small number of large sites with low opportunity costs and short distances to P1 consumers account for the bulk of total net profit, while several marginal sites operate near break-even. Figure ?? reveals a clear negative relationship between opportunity cost rate and site profitability, with sites exceeding 300 € ha⁻¹ yr⁻¹ rarely selected in the optimal solution.

5. Sensitivity analysis

To assess the robustness of the baseline results and to identify the principal drivers of supply chain profitability, a factorial sensitivity analysis is conducted. The analysis follows a full-factorial design over three scenario dimensions: opportunity cost level

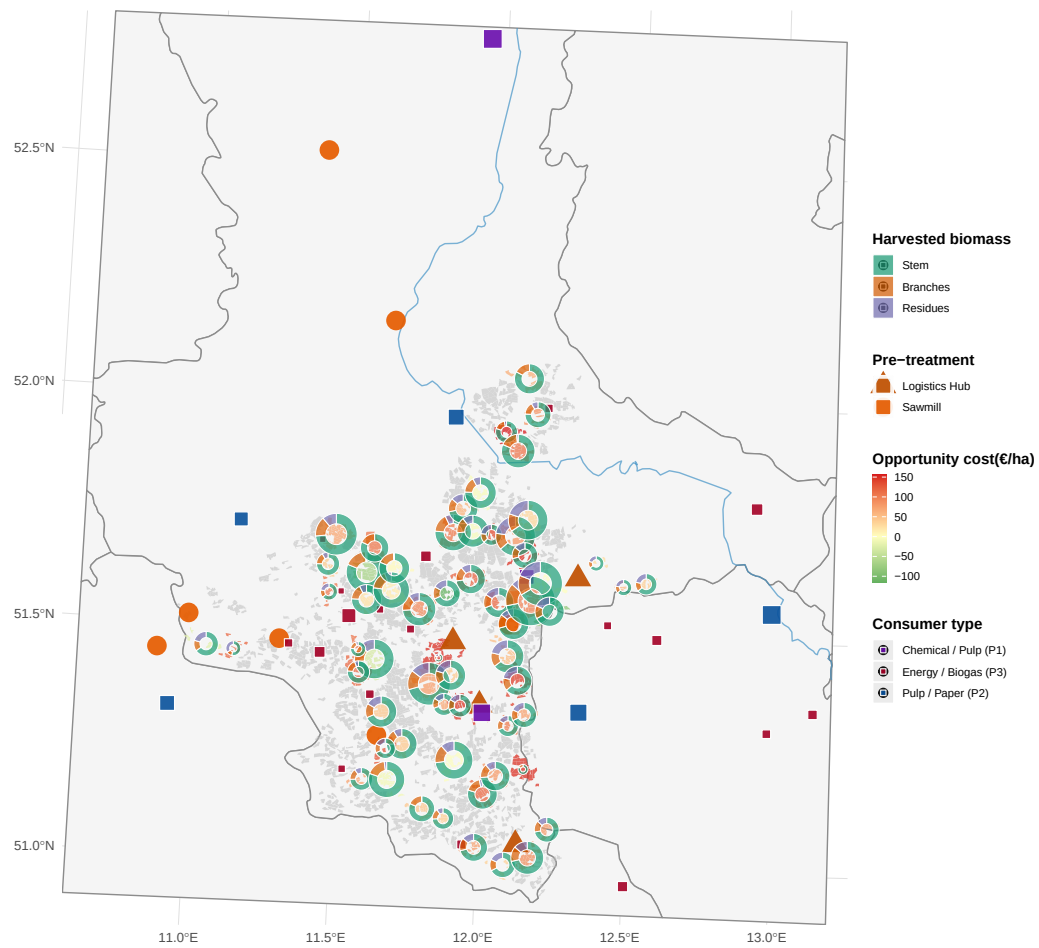


Figure 8: Optimal agroforestry supply chain network. Green polygons: active super-sites with biomass harvest; grey polygons: non-selected sites. Pie charts at active sites show the product mix of harvested biomass (stem = P1, branches = P2, residues = P3), scaled by total harvested volume. Orange symbols: pre-treatment facilities (circle = sawmill, triangle = logistics hub). Coloured squares: consumer sites by dominant demand category.

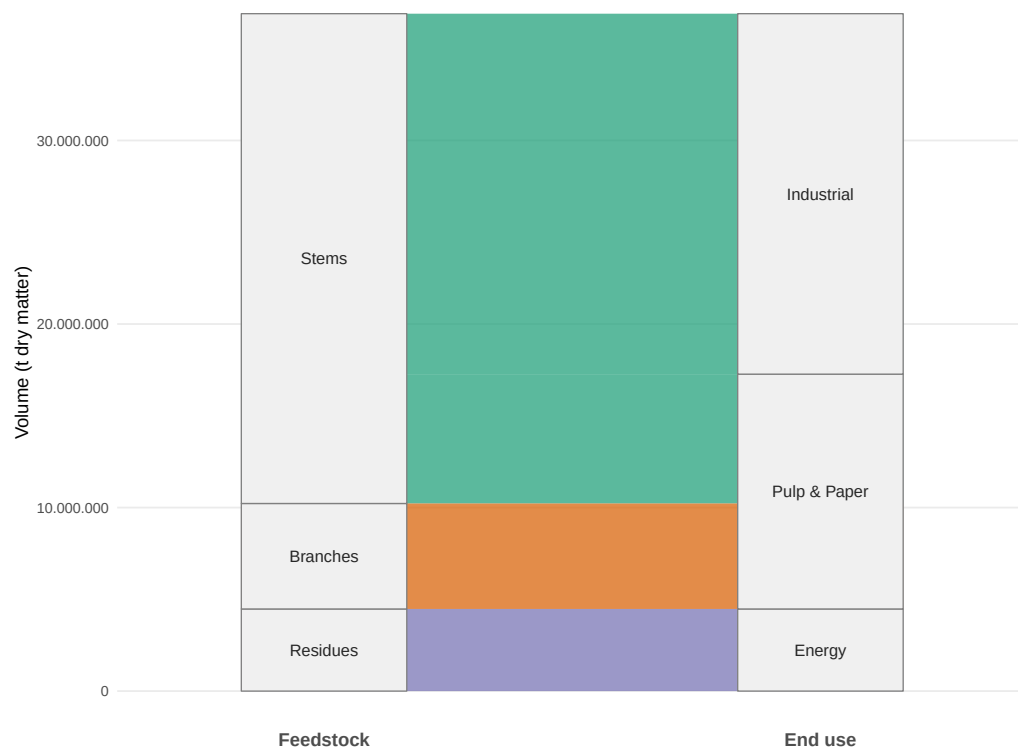


Figure 9: Total production quantity of biomass types and its industrial usage over planning horizon (in tons).

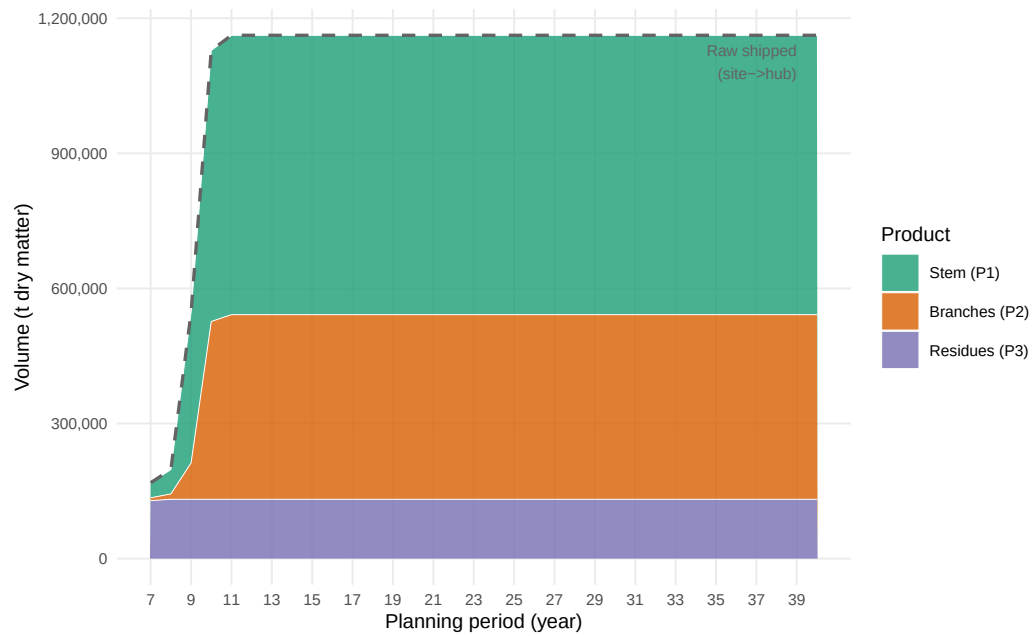


Figure 10: Total biomass delivered to consumers by product type over the planning horizon. Stacked areas show period-level volumes of stem (P1), branches (P2), and residues (P3) flowing from storage hubs to all consumers. Dashed line: total harvested raw biomass shipped from sites to hubs.

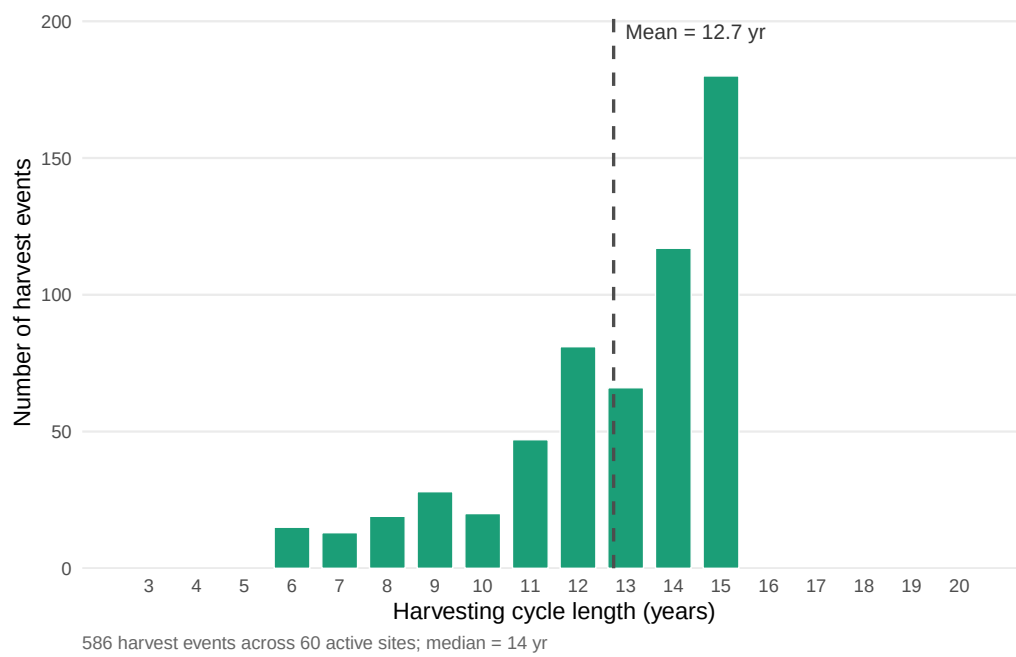


Figure 11: Distribution of harvesting cycle lengths at active agroforestry sites. Each bar represents the number of individual harvest events (over all periods and active sites) whose cycle length (stand age at harvest, i.e. $t - s$) falls in that year bin. Vertical dashed line: mean cycle length. Active sites are defined as sites with at least one selected harvest arc in the optimal solution.

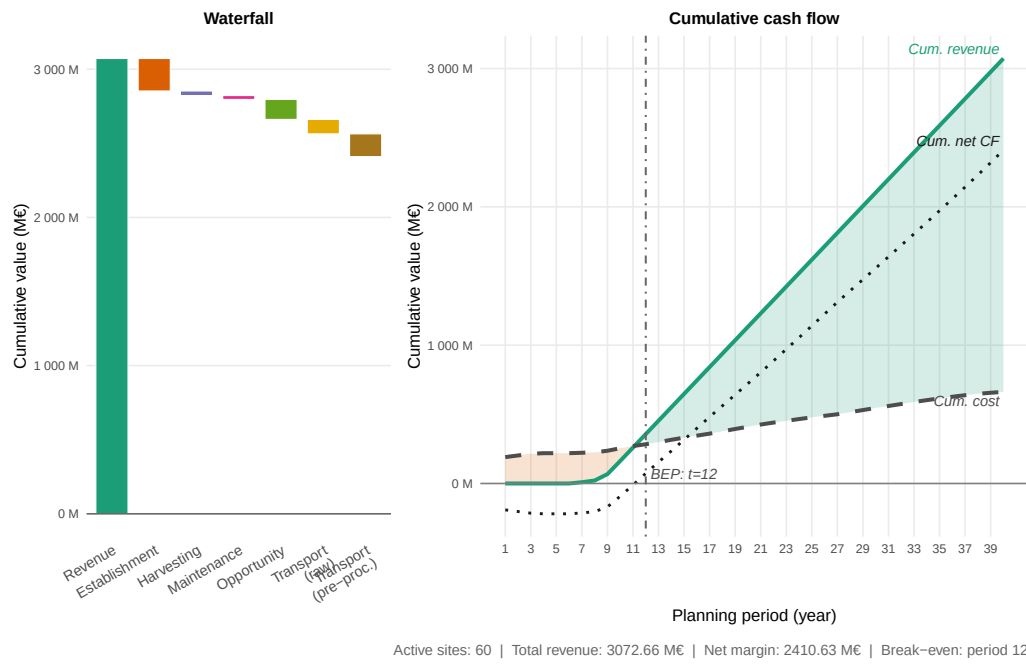


Figure 12: Total cost–profit breakdown across all active sites over the planning horizon. The left panel (waterfall) decomposes the objective value into revenue and individual cost categories; the right panel shows the period-level trajectory of revenues and stacked costs. Cultivation costs are split into establishment, harvesting, maintenance, and opportunity costs; logistics costs cover raw biomass transport (site→hub) and pre-processed transport (hub→consumer); storage costs reflect hub inventory holding charges.

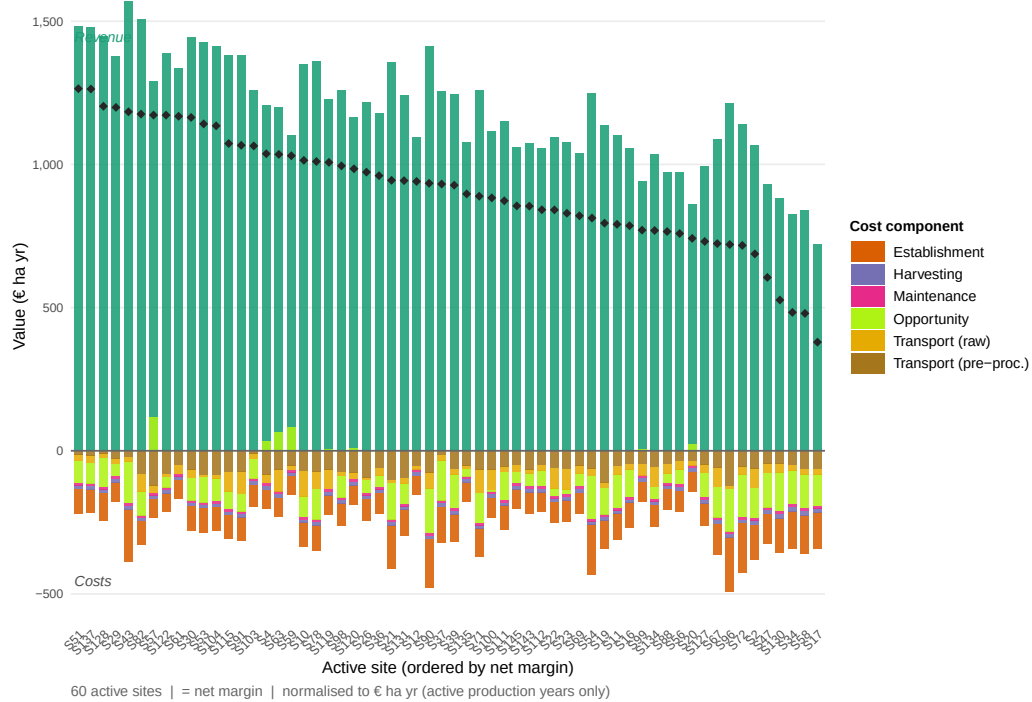


Figure 13: Total revenue and cost breakdown per active agroforestry site over the full planning horizon. Each bar represents one active site; revenue (green, above zero axis) and cost components (stacked below) are expressed in thousand euros per hectare for comparability across sites of different size. Sites are ordered by descending net margin.

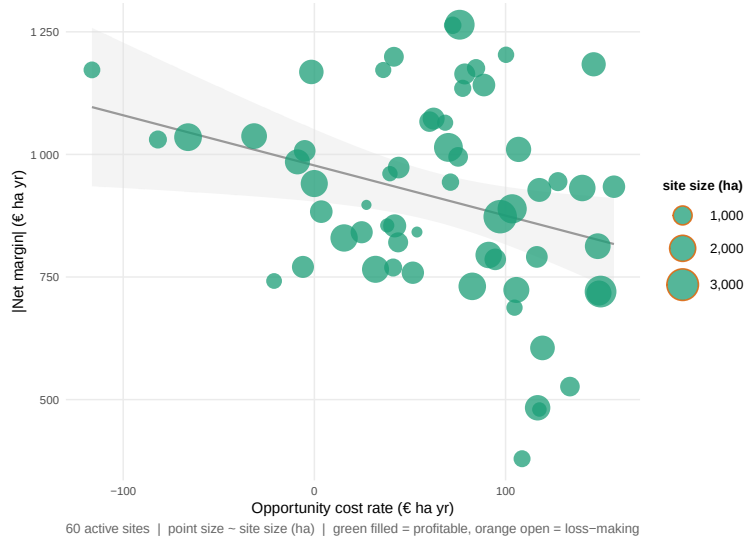


Figure 14: Scatterplot of active agroforestry sites: opportunity cost rate (€ ha yr) on the x-axis versus demand-weighted average delivery distance (km) on the y-axis. Point size is proportional to the site's net margin (€ ha yr); sites with negative net margin are shown as open circles. A LOESS smoothing line indicates the joint trend.

(€ ha⁻¹ yr⁻¹), a cost multiplier applied to all variable cost parameters (establishment, harvest, transport, and storage), and a revenue multiplier applied to all gate prices. The resulting $2 \times 2 \times 2 = 8$ scenarios are solved independently in addition to the baseline, yielding nine comparable instances (Table 7).

Table 7 summarises the key performance indicators across all scenarios. Total profit per hectare per year is most sensitive to the revenue multiplier: elevated gate prices (revenue multiplier = 1.5) substantially improve profitability, while reduced prices (multiplier = 0.5) push marginal sites into loss territory. The supply chain remains profitable in all scenarios with full or elevated revenue even when opportunity costs are high. Scenarios combining reduced revenue (multiplier = 0.5) with high opportunity costs consistently yield negative net profits, indicating that the economic viability of AFS-based supply chains is critically conditional on achieving sufficient product-quality premiums from P1 off-takers. The number of active sites and total wood throughput respond monotonically to the revenue multiplier, confirming that higher gate prices incentivise the activation of marginal sites.

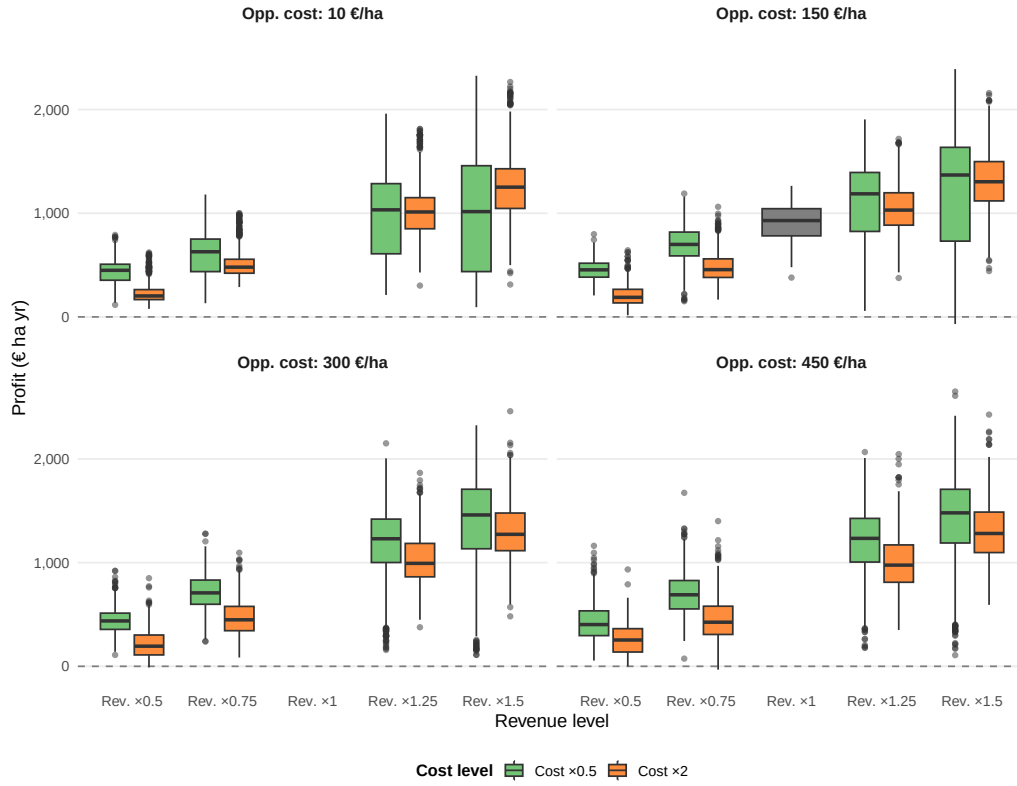


Figure 15: Verteilung des Standortprofits (€ ha yr) über die Ausprägungen der Szenarienparameter Opportunitätskosten (opp_cost), Kostenniveau (cost_level) und Preisniveau (revenue_level). Jeder Boxplot fasst alle aktiven Standorte aller Replikationen der jeweiligen Parameterkombination zusammen.

654 The OLS regression reported in Figure ?? and Table 6 decomposes profit variation
655 across scenarios and sites into effects of four explanatory variables: opportunity cost
656 rate, cost level, revenue level, and log-transformed site area. The revenue multiplier
657 carries the largest absolute coefficient, followed by opportunity cost rate; site area exerts
658 a positive but diminishing marginal effect consistent with economies of scale in logistics
659 and harvesting. Rotation length is positively associated with profit in low-opportunity-
660 cost settings but negatively so when foregone agricultural revenue is high, confirming the
661 rotation-length trade-off in the AFS-SCD formulation (Section 3).


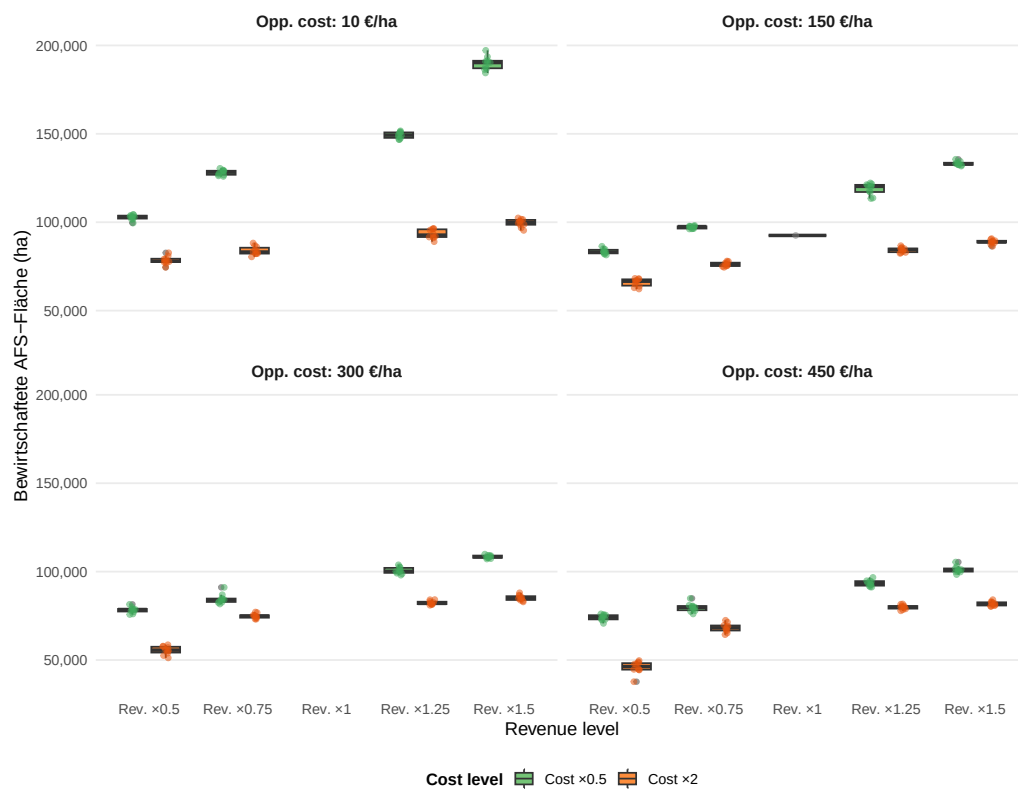


Figure 16: Verteilung der bewirtschafteten AFS-Fläche (ha) über die Ausprägungen der Szenarienparameter Opportunitätskosten (opp_cost), Kostenniveau (cost_level) und Preisniveau (revenue_level). Jeder Boxplot fasst die Summe der aktiven Standortflächen je Replikation und Parameterkombination zusammen. Höhere Werte zeigen eine breitere räumliche Aktivierung des AFS-Potenzials an.

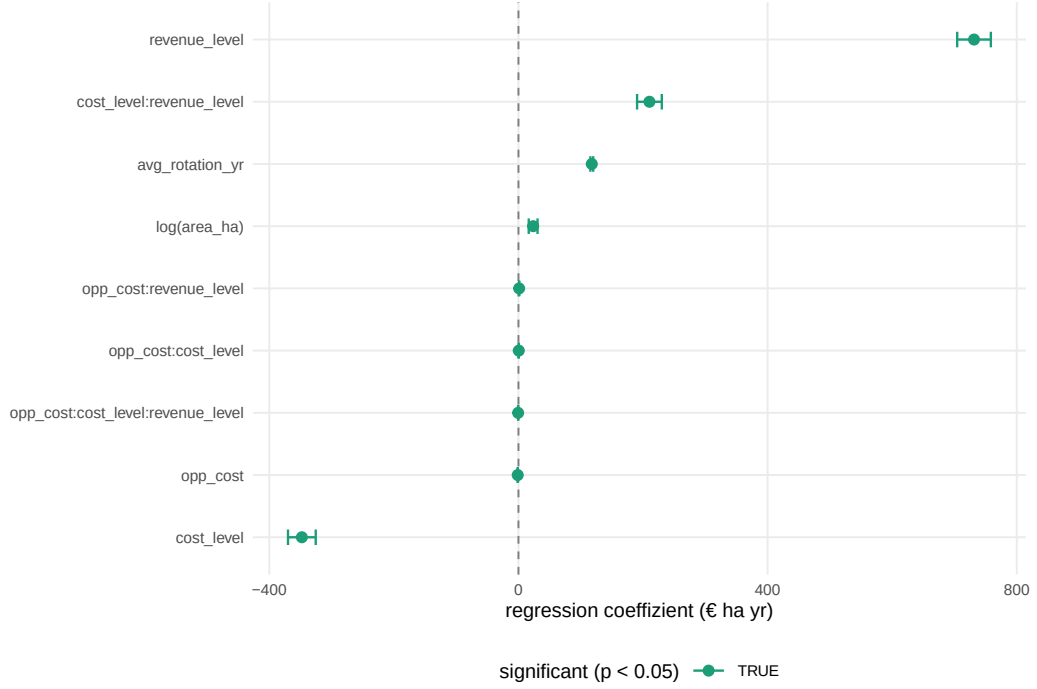

6. Conclusion

This paper has developed and applied the AFS-SCD model, a MILP formulation for the integrated design and operation of agroforestry biomass supply chains. The model endogenises stand age dynamics through binary arc-based age-lag variables, couples component-specific Gompertz yield coefficients for stem, branch, and residue fractions with multi-echelon logistics decisions, and embeds a product quality cascade that allocates biomass grades to chemical, pulp, and energy markets within a unified optimisation framework. The formulation is, to the best of our knowledge, the first supply chain model to simultaneously optimise AFS establishment timing, consecutive harvest scheduling under rotation-age constraints, and product-grade allocation across spatially heterogeneous consumer markets.

The case study for the Saxony-Anhalt tri-state region demonstrates the practical relevance of the approach. The optimal supply chain concentrates AFS establishments in the Elbe and Saale floodplains, where high biomass productivity and proximity to large pulp mills create the most favourable economics. The sensitivity analysis confirms that

profitability depends primarily on achievable gate prices for high-quality (P1) biomass grades: scenarios combining reduced revenue with high opportunity costs yield negative net profits, whereas scenarios with full or elevated prices remain viable under cost pressure. Opportunity cost is the dominant site-level discriminator, with parcels exceeding approximately 300 € ha⁻¹ yr⁻¹ rarely selected in the optimal solution. These findings underscore the importance of product cascading as a strategic lever for AFS viability: maximising the share of stem biomass directed to high-value chemical and pulp applications substantially improves profitability compared to energy-only offtake strategies.

Methodologically, the AFS-SCD model bridges the gap between stand-level growth modelling and regional supply chain optimisation identified in the literature (Zahraee et al., 2020; Lamers et al., 2011). The age-lag constraint structure generalises to other perennial biomass crops with periodic coppice cycles, such as willow or black locust, and to long-rotation silvoarable systems in which rotation length is a strategic variable. The model is extensible to stochastic settings by replacing deterministic yield coefficients with scenario-weighted counterparts or by incorporating robust optimisation over yield uncertainty intervals (Sharma et al., 2013).

Several limitations point to directions for future research. First, consumer demand is treated as exogenous and time-invariant; endogenising demand responses to biomass price changes would require a partial-equilibrium extension. Second, the case study uses a single allometric scenario calibrated to Central European poplar; propagating Gompertz parameter uncertainty through to supply chain outcomes would strengthen the robustness analysis. Third, environmental co-benefits of AFS — including carbon sequestration, nitrate leaching reduction, and biodiversity enhancement — are not monetised in the current objective. Integrating life cycle assessment indicators as additional objectives or constraints would support a more comprehensive sustainability evaluation, consistent with the cleaner production framing of this work.

7. Appendix

References

- Mohsen Arabi, Saeed Yaghoubi, and Hamed Tajik. Optimal design of a microalgae-based biofuel supply chain with co2 reduction and hydrogen production. *Computers & Chemical Engineering*, 130:106530,

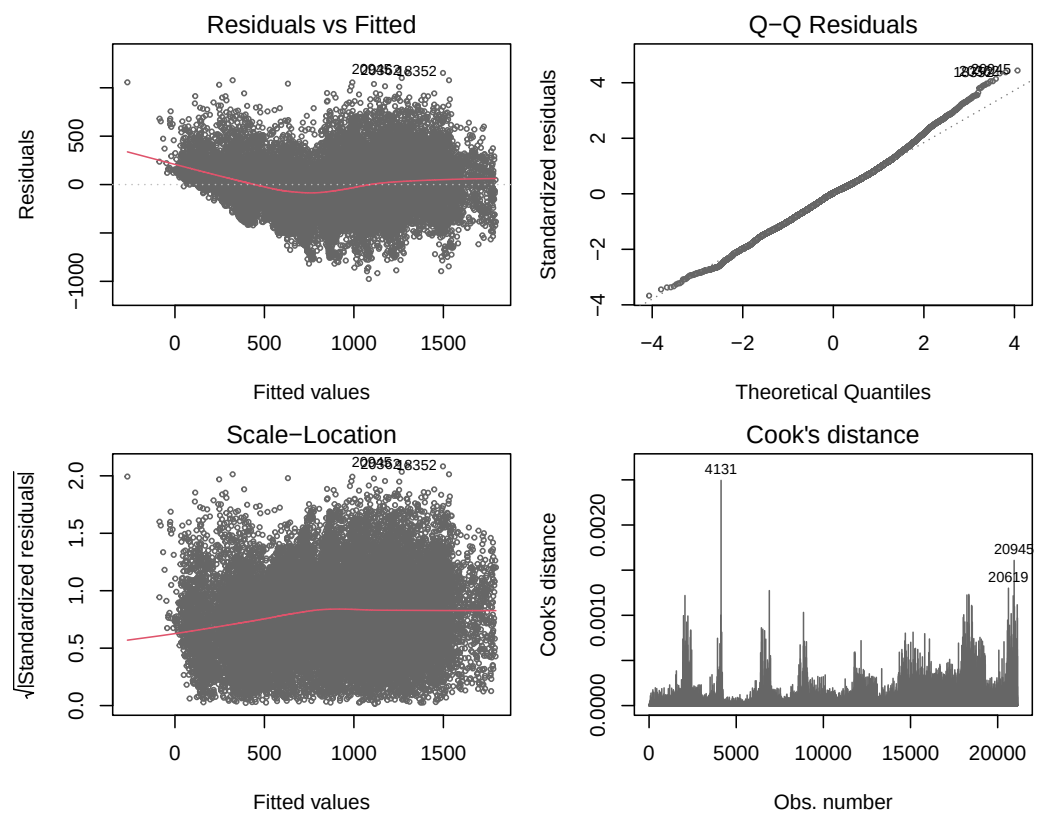


Figure 17: OLS-Diagnostik: Residuen vs. Fitted, Q-Q-Plot, Scale-Location und Cook's Distance.

2019. ISSN 0098-1354. doi: 10.1016/j.compchemeng.2019.106530.

Claudia Cambero and Taraneh Sowlati. Assessment and optimization of forest biomass supply chains from economic, social and environmental perspectives—a review of literature. *Renewable and Sustainable Energy Reviews*, 36:62–73, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2014.04.041.

Vincenzo Civitarese, Andrea Acampora, Giulio Sperandio, Alberto Assirelli, and Rodolfo Picchio. Production of wood pellets from poplar trees managed as coppices with different harvesting cycles. *Energies*, 12(15):2973, 2019. doi: 10.3390/en12152973. Open access.

Anouck De Meyer, Dirk Cattryse, Jussi Rasinmäki, and Jos Van Orshoven. Methods to optimise the design and management of biomass-for-bioenergy supply chains: A review. *Renewable and Sustainable Energy Reviews*, 31:657–670, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2013.12.036.

Anouck De Meyer, Dirk Cattryse, and Jos Van Orshoven. A generic mathematical model to optimise strategic and tactical decisions in biomass-based supply chains (OPTIMASS). *European Journal of Operational Research*, 249(1):293–307, 2016. ISSN 0377-2217. doi: 10.1016/j.ejor.2015.08.003.

Deutscher Fachverband für Agroforstwirtschaft (DeFAF) e.V. Annual review of the Agroforestry Map of Germany 2025, February 2026. URL <https://agroforst-info.de/wp-content/uploads/2026/02/DeFAF-2026-Annual-review-of-the-Agroforestry-Map-of-Germany-2025.pdf>. Available at: <https://agroforst-info.de/wp-content/uploads/2026/02/DeFAF-2026-Annual-review-of-the-Agroforestry-Map-of-Germany-2025.pdf>.

Sandra Duni Ekşioğlu, Aditya Acharya, Lawrence E. Leightley, and Sumit Arora. Analyzing the design and management of biomass-to-biorefinery supply chain. *Computers & Industrial Engineering*, 57(4):1342–1352, 2009. ISSN 0360-8352. doi: 10.1016/j.cie.2009.07.003.

Victor Espinoza, Selene Bautista, Patricia C. Narvaez, Mauricio Alfaro, and Mauricio Camargo. Sustainability assessment to support governmental biodiesel policy in Colombia: A system dynamics model. *Journal of Cleaner Production*, 141:1145–1163, 2017. ISSN 0959-6526. doi: 10.1016/j.jclepro.2016.09.168.

Ralf J. Faasch and Gaia Patenaude. The economics of short rotation coppice in Germany. *Biomass and Bioenergy*, 45:27–40, 2012. ISSN 0961-9534. doi: 10.1016/j.biombioe.2012.04.012.

Anil R. Graves, Paul J. Burgess, Fabrice Liagre, Andrea Pisanelli, Patrice Paris, Gerardo Moreno, Manuel Bellido, Manuela Mayus, Meindert Postma, Bernhard Schindler, Konstantinos Mantzanas, and Christian Dupraz. Development and application of bio-economic modelling to compare silvoarable, arable, and forestry systems in three European countries. *Ecological Engineering*, 29(4):434–449, 2007. ISSN 0925-8574. doi: 10.1016/j.ecoleng.2006.09.018.

Henning Grünwald, Reinhold Böcker, B. Ulrich Schneider, Oliver Bens, and Reinhard F. Hüttl. Biomass production of black locust (*Robinia pseudoacacia* L.) short rotation plantations in Germany: growth and economics of different clones and management practices. *Bioresource Technology*, 98(2):281–286, 2007. ISSN 0960-8524. doi: 10.1016/j.biortech.2006.01.004.

Georg Huber, Kurt-Jürgen Hülsbergen, and Harald Schmid. Allometric equations for above-ground tree-biomass estimation in Southern German short-rotation agroforestry systems. *Bioenergy Research*, 9(3):955–968, 2016. ISSN 1939-1234. doi: 10.1007/s12155-016-9744-z.

- Georg Huber, Christian Amann, Kurt-Jürgen Hülsbergen, and Harald Schmid. Yield potential of tree species in organic and conventional short-rotation agroforestry systems in Southern Germany. *Heliyon*, 4(1):e00543, 2018. ISSN 2405-8440. doi: 10.1016/j.heliyon.2018.e00543.
- Kaushalendra Kumar Jha. Biomass production and carbon balance in two hybrid poplar (*populus euramericana*) plantations raised with and without agriculture in southern France. *Journal of Forestry Research*, 29(6):1689–1701, 2018. ISSN 1007-662X. doi: 10.1007/s11676-017-0555-3.
- Tatuo Kira, Kichiro Shinozaki, and Kikuo Hozumi. The C-D rule, its theory and practical uses. (Intraspecific competition among higher plants. X.). *Journal of Biology, Osaka City University*, 12: 69–82, 1961.
- Patrick Lamers, Martin Junginger, Carlo Hamelinck, and André Faaij. Developments in liquid biofuels commodity trade. *Biofuels, Bioproducts and Biorefining*, 5(4):403–437, 2011. ISSN 1932-104X. doi: 10.1002/bbb.303.
- Frank Lehmkuhl, Alexander Stauch, Roman Schneider, Franziska Feil, and Henning Grunewald. Short-rotation coppice with poplar and willow in Germany: Biomass potentials, rotation lengths, and land-use interactions. *Biomass and Bioenergy*, 176:106908, 2023. ISSN 0961-9534. doi: 10.1016/j.biombioe.2023.106908.
- Krishna Teja Malladi and Taraneh Sowlati. Biomass logistics: A review of important features, optimization modelling and the new trends. *Renewable and Sustainable Energy Reviews*, 94:587–599, 2018. ISSN 1364-0321. doi: 10.1016/j.rser.2018.06.052.
- Babak Mansoornejad, Efstratios N. Pistikopoulos, and Paul R. Stuart. Integrating forest biorefinery metrics into supply chain design and analysis. *Forest Policy and Economics*, 26:43–54, 2013. ISSN 1389-9341. doi: 10.1016/j.forpol.2012.08.003.
- Mercer Stendal GmbH. Mercer stendal: Zellstoffwerk Arneburg – kapazitäten und rohstoffversorgung. Unternehmenswebsite, 2024. URL <https://www.mercerint.com/de/stendal/>. Abgerufen: April 2026.
- P. K. Ramachandran Nair. *An Introduction to Agroforestry*. Kluwer Academic Publishers, Dordrecht, 1993. ISBN 978-0-7923-2134-7.
- Marcin Niemczyk and Brian R. Thomas. Does intensive management affect wood density and fiber properties of hybrid poplar grown in short-rotation plantation? *Forests*, 12(4):399, 2021. ISSN 1999-4907. doi: 10.3390/f12040399.
- Bhavna Sharma, Robert G. Ingalls, Christopher L. Jones, and Ajay Khanchi. Biomass supply chain design and analysis: Basis, overview, modeling, challenges, and future. *Renewable and Sustainable Energy Reviews*, 24:608–627, 2013. ISSN 1364-0321. doi: 10.1016/j.rser.2013.03.049.
- Raffaele Spinelli, Carla Nati, and Natascia Magagnotti. Using modified foragers to harvest short-rotation poplar plantations. *Biomass and Bioenergy*, 33(5):817–821, 2009. ISSN 0961-9534. doi: 10.1016/j.biombioe.2009.01.002.
- Statistisches Bundesamt (Destatis). Kaufwerte und pachtpreise für landwirtschaftliche grundstücke 2022 – Fachserie 3 Reihe 2.4. Technical report, Statistisches Bundesamt, Wiesbaden, 2023. URL <https://www.destatis.de/DE/Themen/Branchen-Unternehmen/Landwirtschaft-Forstwirtschaft-Fischerei/Flaechennutzung/Publikationen/Downloads-Flaechennutzung/>

786 **kaufwerte-landwirtschaft-2030240227004.pdf**. Pachtpreise Sachsen-Anhalt, Tabelle 3.1.
 787 Riccardo Testa, Anna Maria Di Trapani, Mario Foderà, Filippo Sgroi, and Salvatore Tudisca. Economic
 788 evaluation of introduction of poplar as biomass crop in Italy. *Renewable and Sustainable Energy*
 789 *Reviews*, 38:498–506, 2014. ISSN 1364-0321. doi: 10.1016/j.rser.2014.07.007.
 790 Eric Toensmeier. The carbon farming solution: A global toolkit of perennial crops and regenerative
 791 agriculture practices for climate change mitigation and food security. In *The Carbon Farming Solution*.
 792 Chelsea Green Publishing, White River Junction, VT, 2017. ISBN 978-1-60358-571-2.
 793 Miroslav Trnka, Jana Fialová, Vladimír Koutecký, Milan Fajman, Zdeněk Žalud, and Milan Havlíček.
 794 Biomass production and survival rates of selected poplar clones grown under a short-rotation system
 795 on agricultural land. *Plant, Soil and Environment*, 54(2):78–88, 2008. ISSN 1214-1178. doi: 10.17221/
 796 2752-PSE.
 797 UPM Biochemicals. UPM biochemicals leuna: Bioraffinerie für laubholz-biomassekonversion. Un-
 798 ternehmenswebsite, 2024. URL <https://www.upmbiochemicals.com/de/>. Abgerufen: April 2026.
 799 Dajun Yue, Fengqi You, and Seth W. Snyder. Biomass-to-bioenergy and biofuel supply chain optimiza-
 800 tion: Overview, key issues and challenges. *Computers & Chemical Engineering*, 66:36–56, 2014. ISSN
 801 0098-1354. doi: 10.1016/j.compchemeng.2013.11.016.
 802 Seyed Mojib Zahraee, Nirajan Shiwakoti, and Peter Stasinopoulos. Biomass supply chain environmental,
 803 economic, and social sustainability: A systematic literature review. *Industrial Crops and Products*,
 804 145:112144, 2020. ISSN 0926-6690. doi: 10.1016/j.indcrop.2020.112144.

Table 4: Consumer demand quantities and gate prices by product grade. P1: chemical/pulp; P2: sawlog/pulpwood; P3: energy/pellets. Demands in kt wood input per year; prices in €/t wood input at the factory gate.

Consumer	Annual demand			Gate price		
	P1 (kt/yr)	P2 (kt/yr)	P3 (kt/yr)	P1 (€/t)	P2 (€/t)	P3 (€/t)
consumer 1	300.0	–	–	100	–	–
consumer 2	100.0	–	–	120	–	–
consumer 3	–	300	50.0	–	75	40
consumer 4	200.0	–	–	95	–	–
consumer 5	–	30	5.0	–	70	35
consumer 6	–	15	5.0	–	65	35
consumer 7	–	10	3.0	–	60	30
consumer 8	–	5	8.0	–	55	30
consumer 9	2.0	50	20.0	80	70	38
consumer 10	–	–	1.7	–	–	35
consumer 11	–	–	2.9	–	–	35
consumer 12	–	–	2.5	–	–	35
consumer 13	–	–	2.3	–	–	35
consumer 14	–	–	1.9	–	–	35
consumer 15	–	–	2.7	–	–	35
consumer 16	–	–	1.7	–	–	35
consumer 17	–	–	1.9	–	–	35
consumer 18	–	–	1.6	–	–	35
consumer 19	–	–	1.5	–	–	35
consumer 20	–	–	1.5	–	–	35
consumer 21	–	–	1.8	–	–	35
consumer 22	–	–	3.5	–	–	35
consumer 23	–	–	1.6	–	–	35
consumer 24	–	–	2.1	–	–	35
consumer 25	–	–	4.5	–	–	35
consumer 26	–	–	1.8	–	–	35
consumer 27	–	–	3.2	–	–	35
consumer 28	18.5	–	–	55	–	–

Table 5: AFS-SCD base-case parameter values for the Saxony-Anhalt case study. Transport costs refer to road distance (OSRM). Gate prices are weighted averages across consumer sites.

Parameter	Description	Base-case value	Unit
Index sets			
$ \mathcal{T} $	Planning periods	40	yr
$ \mathcal{I} $	KUP super-sites (post-clustering)	145	–
$ \mathcal{J} $	Pre-treatment / storage nodes	11	–
$ \mathcal{K} $	Consumer sites	28	–
$ \mathcal{P} $	Product grades	3	–
Biomass dynamics			
$a^{\min}$	Minimum harvest age (years)	3	yr
$a^{\max}$	Maximum stand age (years)	20	yr
Cost parameters			
c^{tr-raw}	Raw transport cost	0.08	€ t ⁻¹ km ⁻¹
c^{tr-pre}	Pre-processed transport cost	0.06	€ t ⁻¹ km ⁻¹
c^{opp}	Opportunity cost	166	€ ha ⁻¹ yr ⁻¹
Revenue parameters			
$\bar{R}_{P1}$	Mean gate price P1	90	€ t ⁻¹
$\bar{R}_{P2}$	Mean gate price P2	66	€ t ⁻¹
$\bar{R}_{P3}$	Mean gate price P3	35	€ t ⁻¹

Table 6: Overview on OLS regression result (adj. R²:70%, # observations: 21131, σ : 266)

variable	estimate	std. error	t value	p value	CI 2.5%	CI 97.5%
<i>Intercept</i>	-1352.966	34.261	-39.489	0	-1420.121	-1285.811
opp_cost	-1.166	0.059	-19.783	0	-1.281	-1.050
cost_level	-347.783	11.349	-30.645	0	-370.027	-325.539
revenue_level	731.446	13.771	53.115	0	704.454	758.439
avg_rotation_yr	117.729	1.156	101.800	0	115.462	119.995
logarea_ha	23.561	3.610	6.527	0	16.486	30.636
opp_cost × cost_level	0.496	0.043	11.404	0	0.410	0.581
opp_cost × revenue_level	1.054	0.052	20.308	0	0.952	1.156
cost_level × revenue_level	210.283	10.135	20.748	0	190.417	230.148
opp_cost × cost_level × revenue_level	-0.548	0.039	-14.221	0	-0.623	-0.472

Table 7: Key performance indicators for benchmark and sensitivity scenarios. Opp. cost: opportunity cost per hectare; Cost/Rev. mult.: multipliers relative to the baseline scenario (1.0 = baseline). Total profit is net revenue minus all costs over the full planning horizon; demand satisfaction reports the share of total customer demand served.

Opp. cost (€/ha)	Cost mult.	Rev. mult.	Profit (€/ha · a)	Act. sites	Wood (kt/a)	Demand sat. (%)
10	0.5	0.50	311	72	939	80.8%
10	0.5	0.75	404	90	958	82.5%
10	0.5	1.25	616	105	971	83.5%
10	0.5	1.50	591	134	984	84.6%
10	2.0	0.50	179	59	881	75.8%
10	2.0	0.75	389	62	903	77.7%
10	2.0	1.25	757	67	924	79.5%
10	2.0	1.50	904	72	932	80.2%
150	0.5	0.50	351	59	910	78.3%
150	0.5	0.75	499	69	931	80.1%
150	0.5	1.25	737	85	951	81.8%
150	0.5	1.50	808	95	960	82.6%
150	1.0	1.00	707	57	919	79.1%
150	2.0	0.50	179	46	813	69.9%
150	2.0	0.75	390	54	890	76.5%
150	2.0	1.25	799	60	914	78.6%
150	2.0	1.50	980	61	922	79.3%
300	0.5	0.50	356	56	890	76.6%
300	0.5	0.75	555	59	911	78.4%
300	0.5	1.25	854	72	934	80.4%
300	0.5	1.50	969	77	942	81.1%
300	2.0	0.50	187	39	714	61.5%
300	2.0	0.75	388	53	878	75.5%
300	2.0	1.25	798	59	907	78.0%
300	2.0	1.50	987	61	914	78.6%
450	0.5	0.50	354	53	867	74.6%
450	0.5	0.75	552	57	894	76.9%
450	0.5	1.25	895	66	924	79.5%
450	0.5	1.50	1016	70	933	80.3%
450	2.0	0.50	244	33	606	52.1%
450	2.0	0.75	379	48	837	72.0%
450	2.0	1.25	787	57	897	77.2%
450	2.0	1.50	1014	59	907	78.0%