

# 1 | Patch antenna design

## 1.1 Design Procedure of Patch Antenna

(All formulas from ?? to ?? is taken from [?] the formulas from ?? to ?? is from [?])

Before a patch antenna can be designed, it is important to find out on which substrate it should be designed for. This gives some parameter for the height,  $h$  and the relative dielectric constant,  $\epsilon_r$ . Equally important is to determine the frequency for which the patch antenna should work for,  $f$ . When these parameters have been determined the actual design can begin. The width is found using ??.

$$w = \frac{c}{2f} \cdot \sqrt{\frac{2}{\epsilon_r + 1}} \quad (1.1)$$

Where:

$w$	is the width of the patch antenna	[m]
$c$	is the speed of light	$\left[\frac{m}{s}\right]$
$f$	is the chosen frequency	[Hz]
$\epsilon_r$	is the relative dielectric constant	[1]

Before the length of the patch can be found the effective dielectric constant needs to be found using ??.

$$\epsilon_{eff} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \cdot \left(1 + \frac{12h}{w}\right)^{-\frac{1}{2}} \quad (1.2)$$

Where:

$\epsilon_{eff}$	is the effective dielectric constant	[1]
$h$	is the height of the substrate	[m]

The total length of the patch include both the length of the patch itself but also the electromagnetic extension from the edges. So to find the length of the patch itself can thus be found using ??.

$$L_{eff} = L - 2 \cdot \Delta L \quad (1.3)$$

Where:

$L_{eff}$	is the length of the patch antenna	[m]
-----------	------------------------------------	-----

## Chapter 1. Patch antenna design

$L$  is the total radiating length of the patch antenna [m]

$\Delta L$  is the extension of the length from the patch antenna [m]

The extension of the length is found using ??

$$\Delta L = h \cdot 0.412 \frac{(\epsilon_{eff} + 0.3) \left( \frac{w}{h} + 0.264 \right)}{(\epsilon_{eff} - 0.258) \left( \frac{w}{h} + 0.8 \right)} \cdot 10^{-3} \quad (1.4)$$

The total radiating length is found using ??

$$L = \frac{c}{2 \cdot f \cdot \sqrt{\epsilon_{eff}}} \quad (1.5)$$

Now that the physical dimensions of the patch has been found a feed needs to be made. In this case a strip line feed is chosen. Since the equipment including cables and connectors are 50 ohm this will be the desired match. The impedance in the patch varies from edge through the patch and to the other edge with 0 ohm in the center and  $\approx 240$  ohm at the edge. The desired feed point is then found using ??.

$$y_0 = \frac{\arccos \left( \sqrt{\frac{R_{in}(y=0)}{R_{in}(y=y_0)}} \right) \cdot L}{\pi} \quad (1.6)$$

Where:

$y_0$  is the insert feed point [m]

The gap between the feed line and the patch has through simulations been shown to decrease performance, meaning the smaller the gap the better the performance. The gap is chosen to 0.25 mm as a minimum production width.

The feed line needs to be matched to 50 ohm also, this is done by adjusting the width of the feed line. The width can be found using ?? to ??.

$$Z_0 = \frac{\eta_0}{2\pi\sqrt{2}\sqrt{\epsilon_r + 1}} \cdot \ln \left( 1 + 4 \cdot \left( \frac{h}{w_{eff}} \right) \cdot (X_1 + X_2) \right) \quad (1.7)$$

Where:

$Z_0$  is the desired impedance [ $\Omega$ ]

$\eta_0$  is the free space impedance =  $120 \pi$  [ $\Omega$ ]

$w_{eff}$  can be found in ?? [m]

$X_1$	can be found in ??	[1]
$X_2$	can be found in ??	[1]

$$w_{eff} = w_f + \left(\frac{t}{\pi}\right) \cdot \ln \left( \frac{4e}{\sqrt{\left(\frac{t}{h}\right)^2 + \left(\frac{t}{w_f\pi+1.1t\pi}\right)^2}} \right) \cdot \frac{\epsilon_r + 1}{2 \cdot \epsilon_r} \quad (1.8)$$

Where:

$w_f$	is the width of the feed line	[m]
$t$	is the thickness of the feed line	[m]
e	is Eulars number $\approx 2.718$	[1]

$$X_1 = 4 \cdot \left( \frac{14\epsilon_r + 8}{11\epsilon_r} \right) \cdot \left( \frac{h}{w_{eff}} \right) \quad (1.9)$$

$$X_2 = \sqrt{X_1^2 + \left( \frac{\epsilon_r + 1}{2 \cdot \epsilon_r} \right) \cdot \pi^2} \quad (1.10)$$

## 1.2 Dimensions of Patch Antennas

The patch antennas have been designed for a FR4 board with a height of 1.6 mm and a copper thickness of 35  $\mu\text{m}$ .

	858MHz	2.58GHz	Unit
<b>Width</b>	105.7	38.2	mm
<b>Length</b>	82.7	29.6	mm
<b>Feedpoint</b>	29.5	10.9	mm
<b>Feed Width</b>	3.06	3.06	mm

Table 1.1: Calculated parameters

Chapter 1. Patch antenna design




(a) Designed patch for 858 MHz

(b) Designed patch for 2.58 GHz

**Figure 1.1:** The manufactured patch antennas

## 2 | Monopole design

A monopole antenna is one of the most simple antenna structures, as it is just a wire, where the signal generator is connected at one end, place atop of a ground plane. The theoretic radiation pattern can be seen on [??](#). As the ground plane is not perfect in reality, the shape might distort by either changing the tilt or going towards a more doughnut shape.

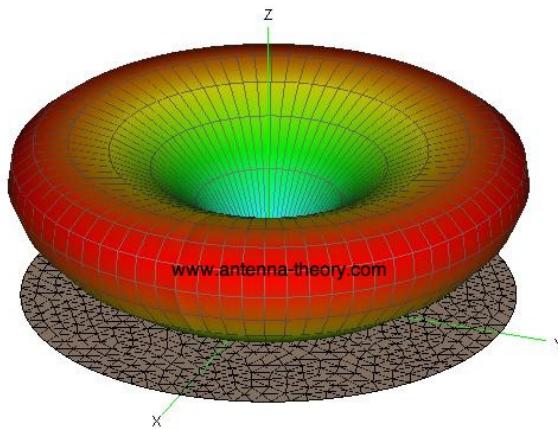

**Figure 2.1:** Radiation pattern of a quarter length monopole antenna, with a ground plane with a diameter on 3 wavelength.

The frequency of the monopole antenna is determined by the length of the antenna, like the dipole antenna. The antenna needs a length equal to a forth of the wavelength of the wanted frequency, which is equal to half the size of a dipole antenna, with same frequency. With this length, it will have a input impedances on  $(36.5 + 21.25j)\Omega$ .

$$L = \frac{\lambda}{4} \quad (2.1)$$

Where:

$L$       is the length of the antenna      [m]

$\lambda$       is the wavelength of the wanted frequency      [m]


### 2.1 Dimensions of Monopole Antennas

The monopole antennas have been designed with the dimensions

	858MHz	2.58GHz	Unit
<b>Height</b>	87	29	mm
<b>Width of ground plane</b>	130	60	mm

**Table 2.1:** Calculated parameters

Chapter 2. Monopole design

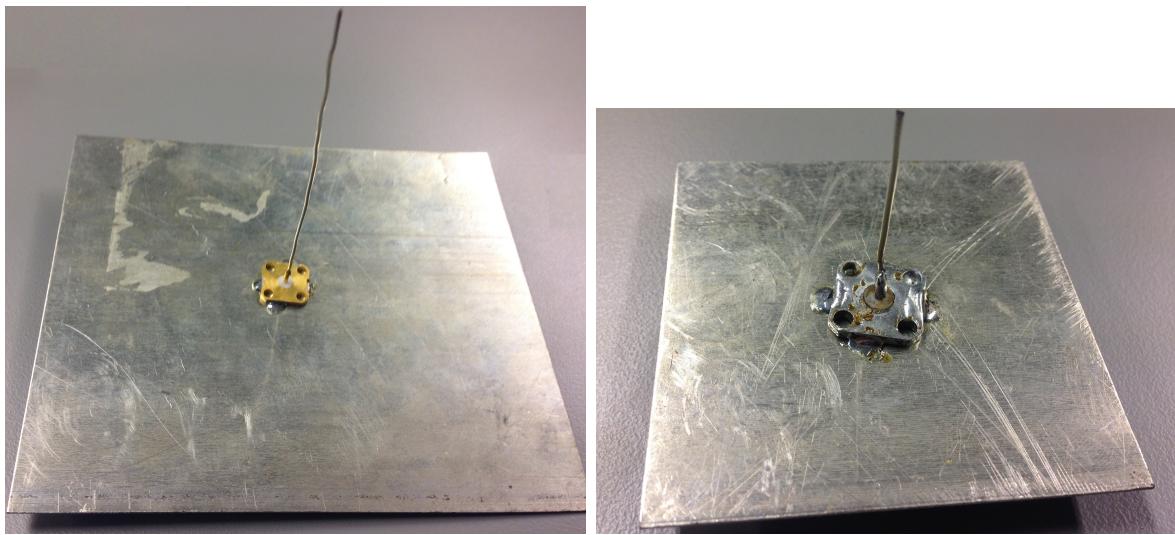

(a) Designed monopole for 858 MHz

(b) Designed monopole for 2.58 GHz


**Figure 2.2:** The manufactured monopole antennas

# 3 | Performance


The antennas have been tested in Satimo Starlab see ???. The radiation pattern for the monopoles can be seen on ?? and ?? and on ?? and ?? for the patch antennas.




**Figure 3.1:** Satimo starlab

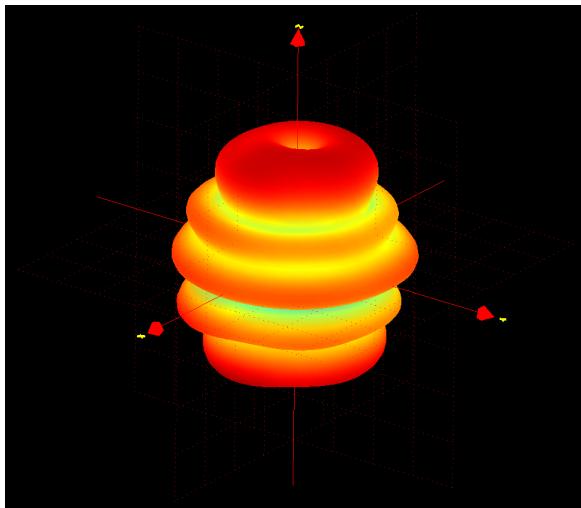


**Figure 3.2:** Radiation pattern for the monopole at 858 MHz.

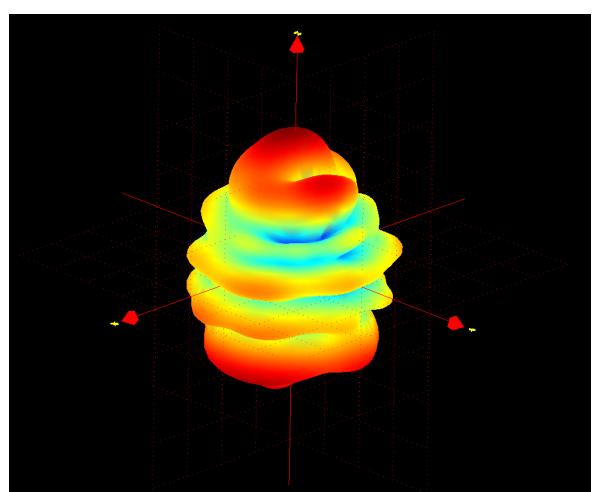

**Figure 3.3:** Radiation pattern for the monopole at 2.58 GHz.

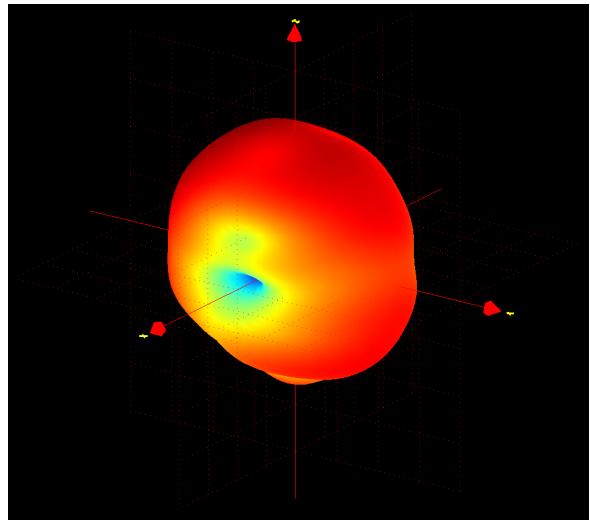

**Figure 3.4:** Radiation pattern for the patch at 858 MHz.

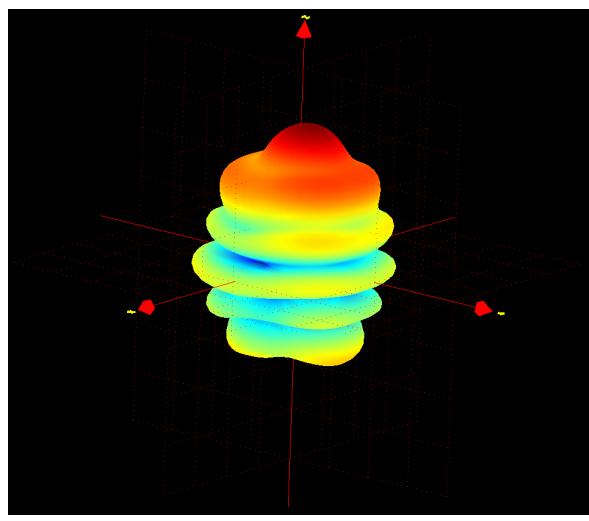

**Figure 3.5:** Radiation pattern for the patch at 2.58 GHz.