eCMPilot | Corsa-e CAN networks

Consolidated vector schematic | English wire colours | P2JO / P2J0 wiring collection | revision 3 / 2026-11-11

ENGINEERING REFERENCE

Source-derived wiring; vehicle fitment not yet verified

ARCHITECTURE / INTERNAL CONNECTIONS

Details A-F below. Repeated unit IDs refer to the same ECU. Each coloured network line represents a CAN conductor pair.

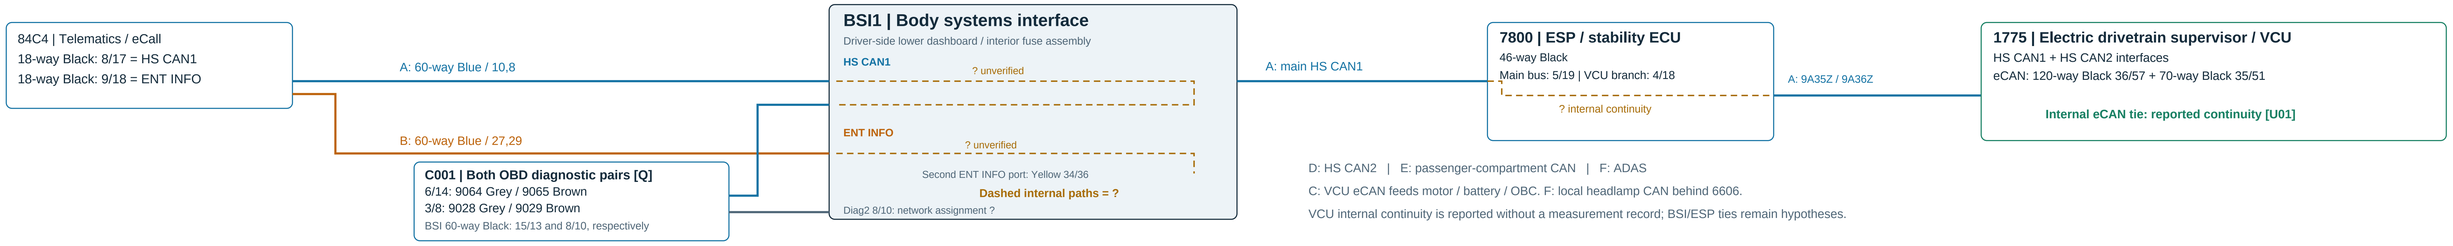

D: HS CAN2 | E: passenger-compartment CAN | F: ADAS

C: VCU eCAN feeds motor / battery / OBC. F: local headlamp CAN behind 6606.

VCU internal continuity is reported without a measurement record; BSI/ESP ties remain hypotheses.

BCM6 = roof SOS console, not 84C4. No CAN pair is drawn through its IC95A connection. [T]

A HS CAN1 / telematics + OBD + vehicle

Separate BSI ports and ESP ports are deliberately not shorted together.

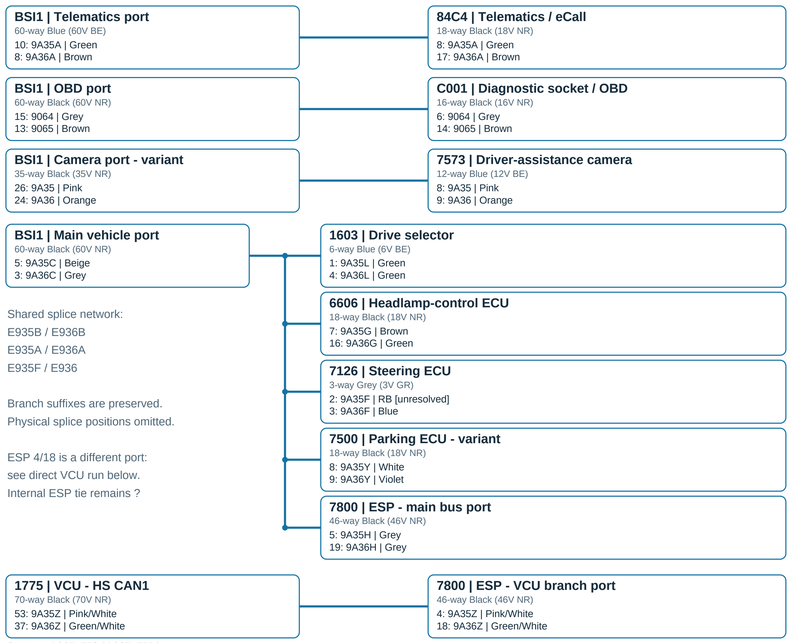

Shared splice network:
E935B / E936B
E935A / E936A
E935F / E936

Branch suffixes are preserved.
Physical splice positions omitted.

ESP 4/18 is a different port:
see direct VCU run below.
Internal ESP tie remains ?

Source A: D3CZV75G / D3CZV75R | p.1

B ENT INFO / infotainment + telematics

E934 / E935 share the dashboard pair; the second BSI run is separate.

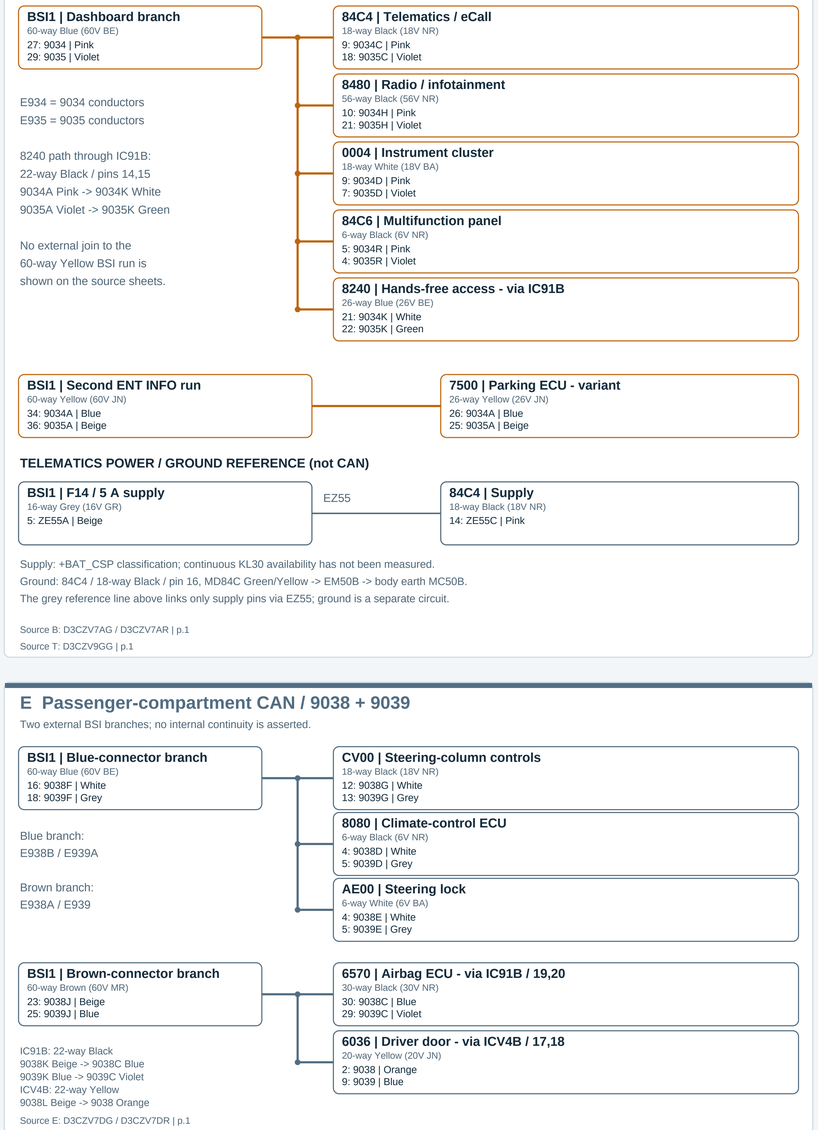

E934 = 9034 conductors
E935 = 9035 conductors

8240 path through IC91B:
22-way Black / pins 14,15
9034A Pink -> 9034K White
9035A Violet -> 9035K Green

No external join to the
60-way Yellow BSI run is
shown on the source sheets.

TELEMATICS POWER / GROUND REFERENCE (not CAN)

Supply: +BAT_CSP classification; continuous KL30 availability has not been measured.
Ground: 84C4 / 18-way Black / pin 16, MD84C Green/Yellow -> EM50B -> body earth MC50B.
The grey reference line above links only supply pins via EZ55; ground is a separate circuit.

Source B: D3CZV7AG / D3CZV7AR | p.1
Source T: D3CZV9GG | p.1

C eCAN / VCU + traction system + OBC

93P5 / 93P6 | Internal OBC-to-motor/battery branch continuity: reported.

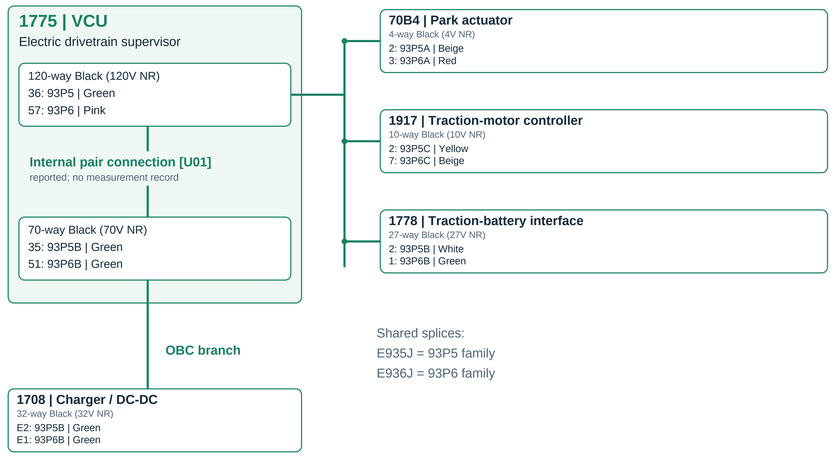

Shared splices:
E935J = 93P5 family
E936J = 93P6 family

The two eCAN runs are reported to join inside 1775 in the installation notes [U01].
The source sheet alone does not depict this internal continuity. No VCU cross-bus forwarding
or electrical join to HS CAN1 / HS CAN2 is implied.

93P5B / 93P6B at 1708 and 1778 are distinct external wire runs; identical labels
must not be used to bypass the VCU branch routing.

Source C: D3CZV7CG | p.1

D HS CAN2 / 9A37 + 9A38

Baseline shown: D3CZV77G. Other equipment layouts are listed separately.

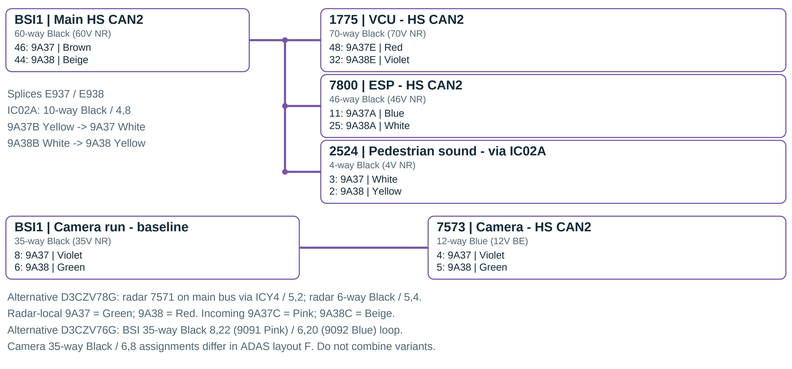

Splices E937 / E938
IC02A: 10-way Black / 4,8
9A37B Yellow -> 9A37 White
9A38B White -> 9A38 Yellow

Alternative D3CZV78G: radar 7571 on main bus via ICY4 / 5,2; radar 6-way Black / 5,4.
Radar-local 9A37 = Green; 9A38 = Red. Incoming 9A37C = Pink; 9A38C = Beige.
Alternative D3CZV76G: BSI 35-way Black 8,22 (9091 Pink) / 6,20 (9092 Blue) loop.
Camera 35-way Black / 6,8 assignments differ in ADAS layout F. Do not combine variants.

Source D: D3CZV77G | p.1

E Passenger-compartment CAN / 9038 + 9039

Two external BSI branches; no internal continuity is asserted.

Blue branch:
E938B / E939A

Brown branch:
E938A / E939

IC91B: 22-way Black
9038K Beige -> 9038C Blue
9039K Blue -> 9039C Violet
ICV4B: 22-way Yellow
9038L Beige -> 9038 Orange

Source E: D3CZV7DG / D3CZV7DR | p.1

F ADAS + local headlamp CAN

Equipment alternatives. Camera pins overlap with layout D but wire families differ.

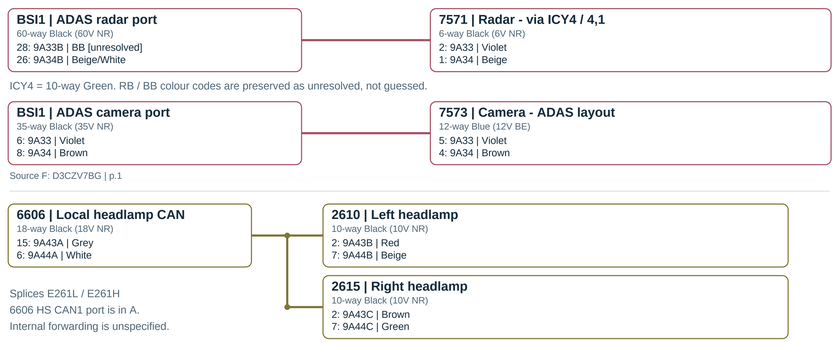

ICY4 = 10-way Green. RB / BB colour codes are preserved as unresolved, not guessed.

Splices E261L / E261H
6606 HS CAN1 port is in A.
Internal forwarding is unspecified.

Source F: D3CZV7BG | p.1
Source L: D3CZV79G | p.1

HOW TO READ THIS SHEET

Solid network line: one CAN pair. Both conductors are listed at each endpoint. Dots: simplified shared splices.
Solid green inside VCU [U01]: reported internal eCAN tie. Dashed amber + ?: unverified internal tie.
Card rows = cavity : printed wire ID | English physical wire colour. Network stroke colours are only visual grouping.
H/L polarity and bitrate are not assigned. Connector cavity viewing direction is not established.

FR COLOUR CODES -> ENGLISH

NR Black | BE Blue | BA White | GR Grey | VE Green
MR Brown | RS Pink | VI Violet | BG Beige | RG Red
OR Orange | JN Yellow | VJ Green/Yellow | ND Unspecified
RB / BB: unresolved. Slash colours retain both components.

SCOPE / TRACEABILITY

Source keys A-F / T / L / Q are resolved in the adjacent README and JSON.
OBD [Q]: D3CZV7FG. Power: T + BSI fuse allocation [P]. U01: installation notes, 2026-10-28.
Not a full harness: LIN, diesel DEPOLLUTION and trailer options omitted.
Variants are not a single verified vehicle configuration. No CAN commands implied.