Pulse gain versus fuel mixture

Completed spherical-pulse simulations at prescribed hot inflow

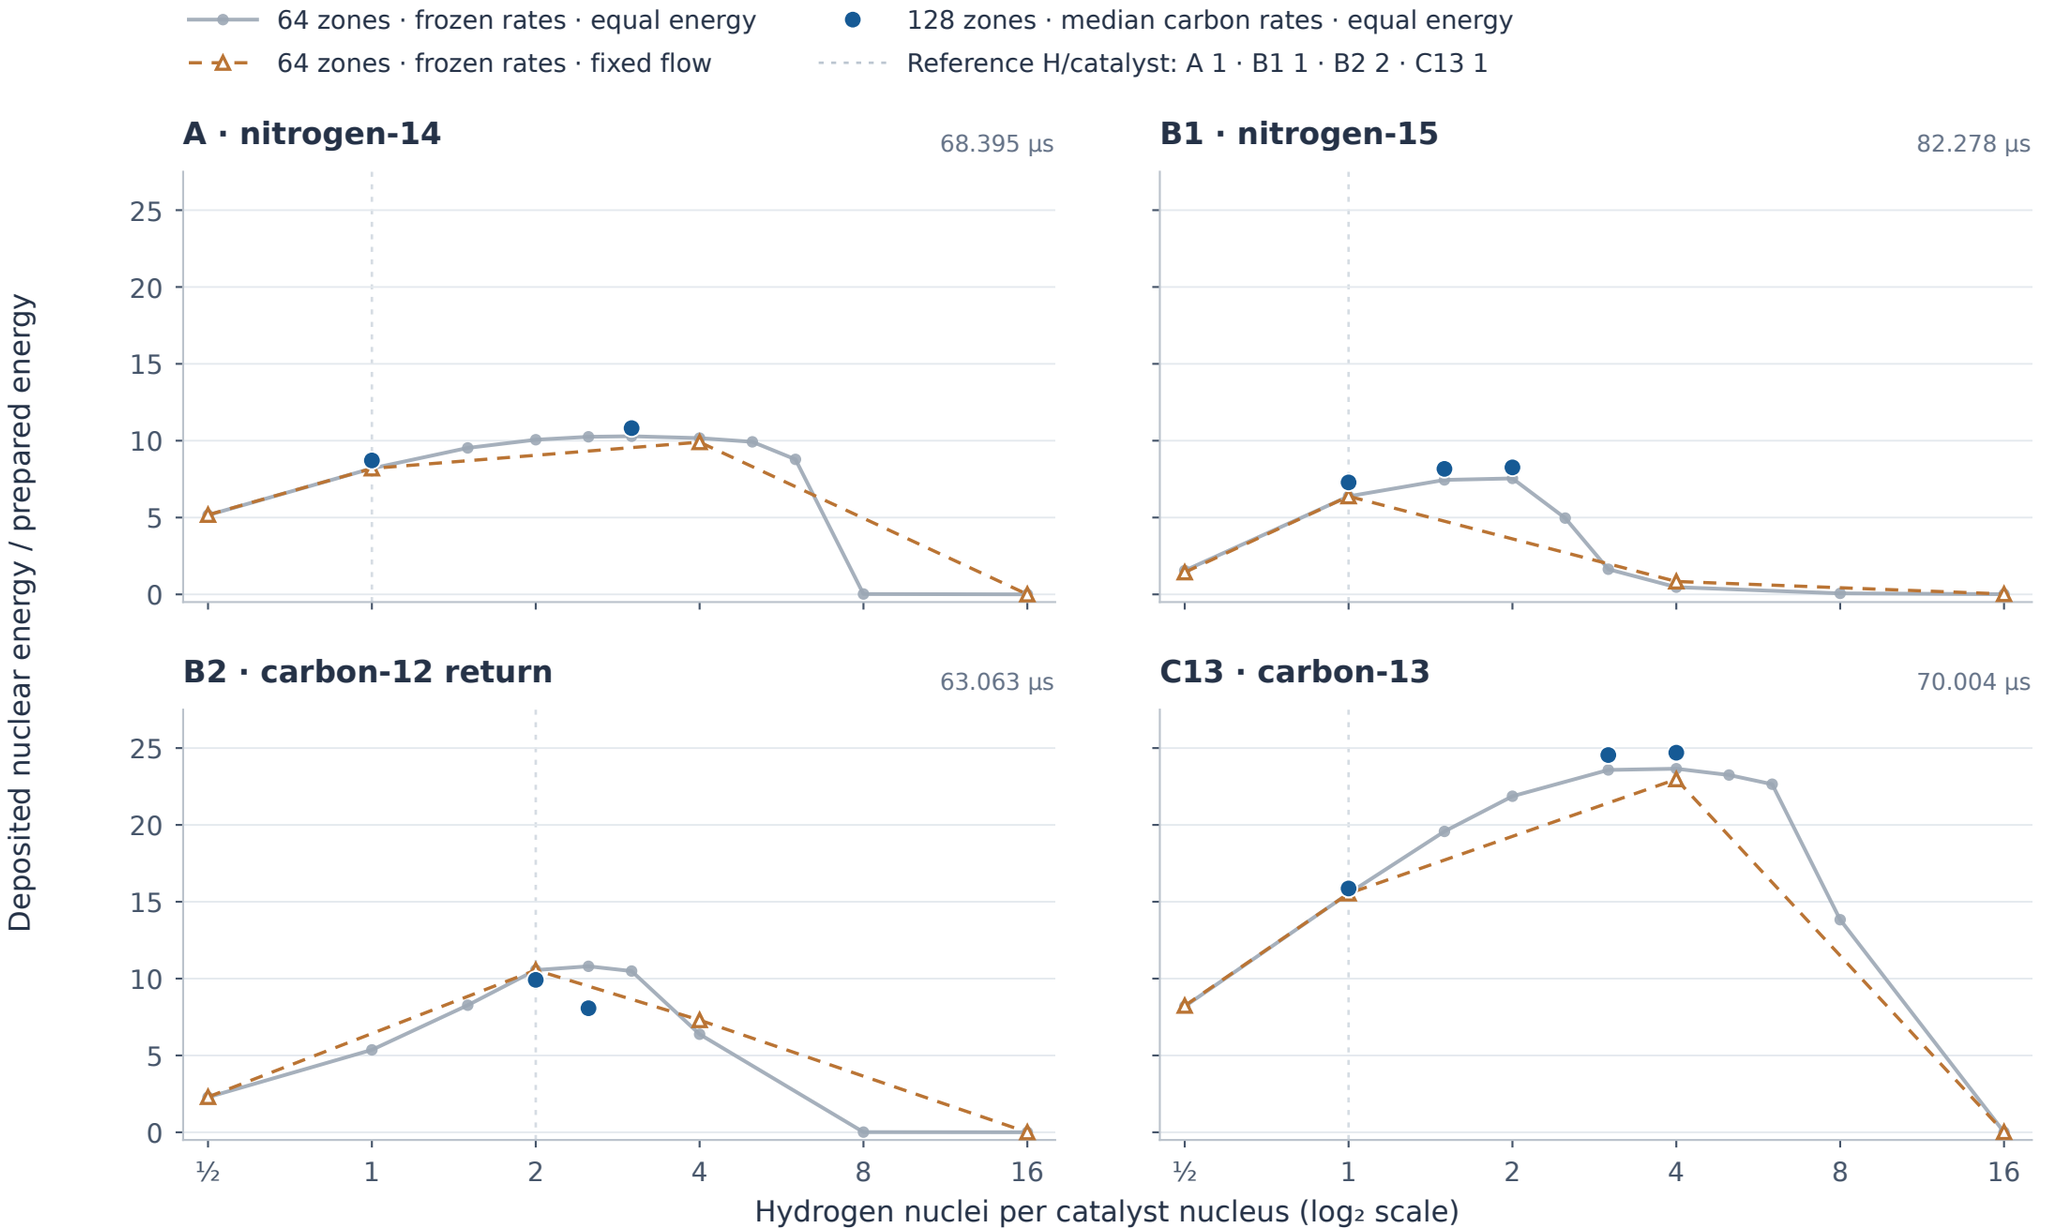

Mass, density and temperature profiles are fixed within each stage; grey opacity κ = 0.001 m²/kg.

Equal energy adjusts inflow velocity. Fixed flow retains velocity and changes prepared energy. Physical duration is fixed.

The 128-zone points change mesh and two carbon capture rates together. Lines connect tested 64-zone cases.

Fixed-flow reference points reuse identical baseline inputs. Pulse gain precedes whole-plant energy accounting.