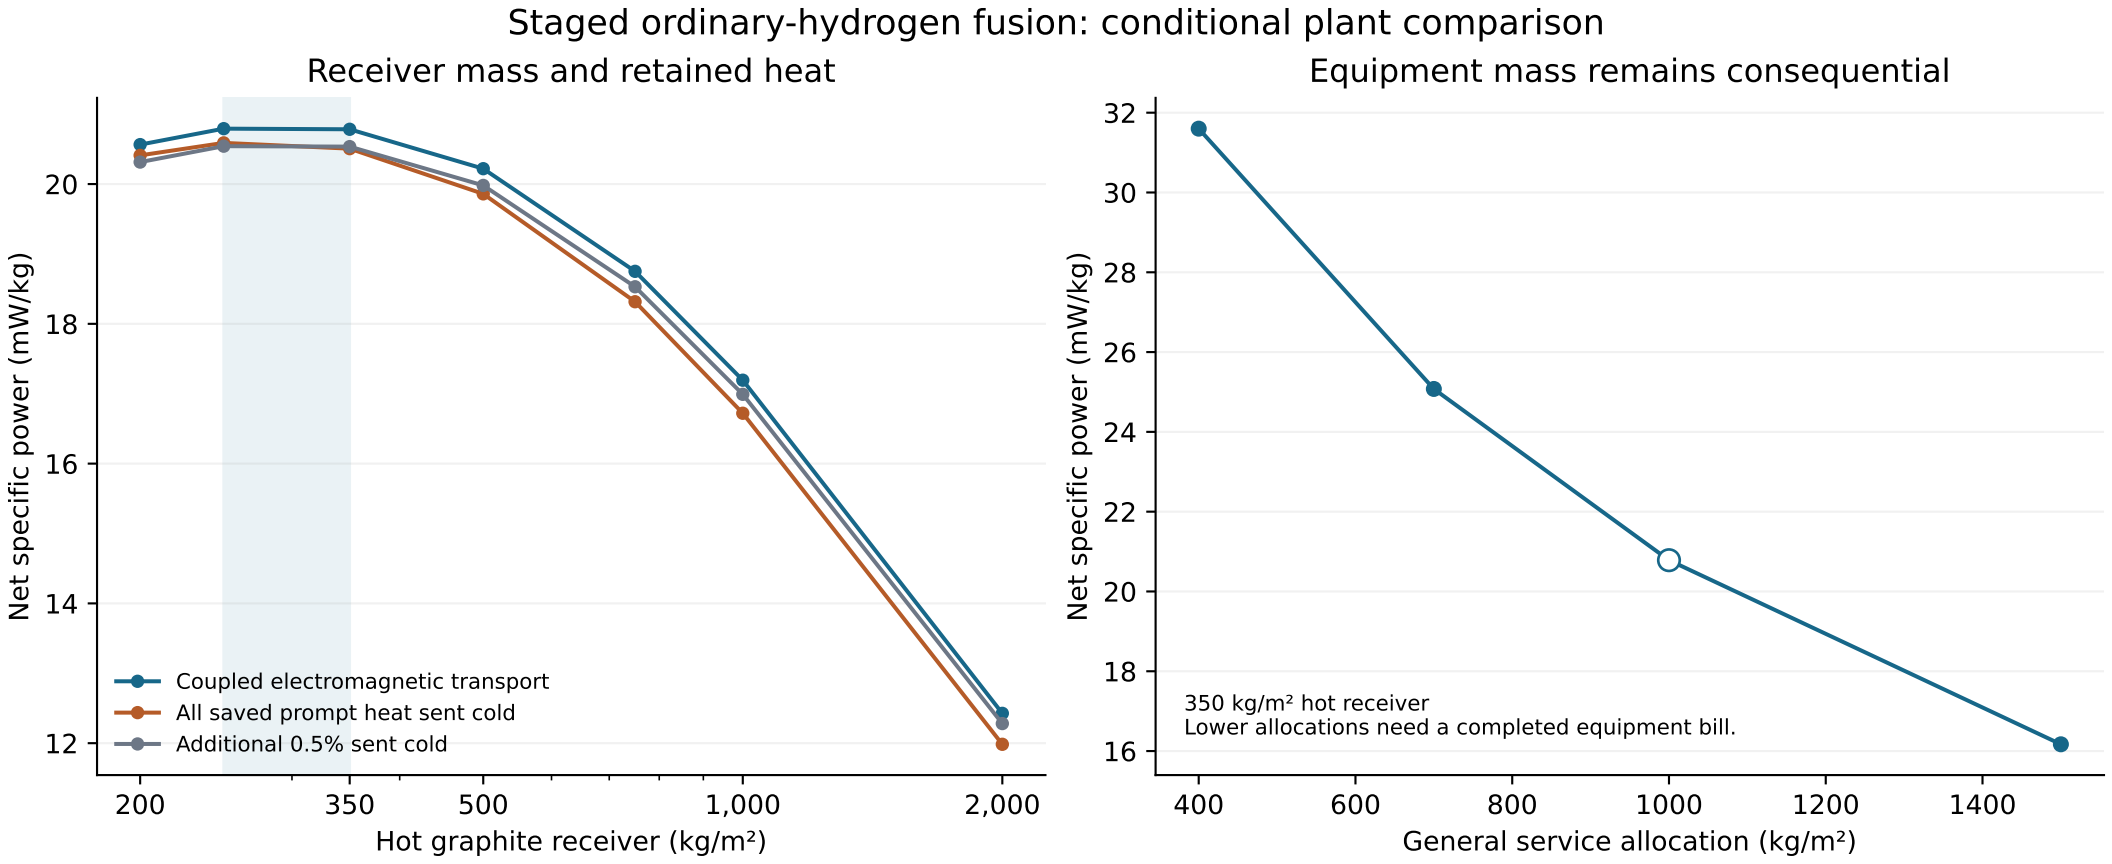
Staged ordinary-hydrogen fusion: conditional plant comparison
Receiver mass and retained heat
Net specific power (mW/kg)
20
18
16
14
12
Coupled electromagnetic transport
All saved prompt heat sent cold
Additional 0.5% sent cold
200
350
500
1,000
2,000
Hot graphite receiver (kg/m²)
Equipment mass remains consequential
Net specific power (mW/kg)
32
30
28
26
24
22
20
18
16
350 kg/m² hot receiver
Lower allocations need a completed equipment bill.
400
600
800
1000
1200
1400
General service allocation (kg/m²)