



RJ45 pairs (Falcon): port1 = 1(+)/2(-), port2 = 3(+)/6(-), port3 = 5(+)/4(-), port4 = 7(+)/8(-). diff tx rev D has port 3 reversed.



Pinout diagram for the LM75BD precision centigrade centipiece. The chip is shown with pins 1 through 8. Pin 1 is SDA, Pin 2 is SCL, Pin 3 is OS, Pin 4 is GND, Pin 5 is GND, Pin 6 is A1, Pin 7 is A0, Pin 8 is VCC. The diagram shows connections to a breadboard with a 5V supply and ground.

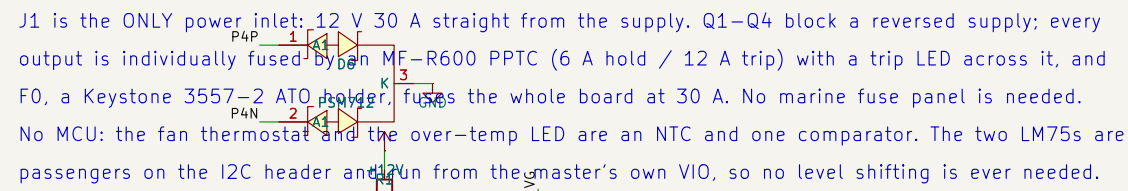