



Cross Section A-A

Proposed Camp

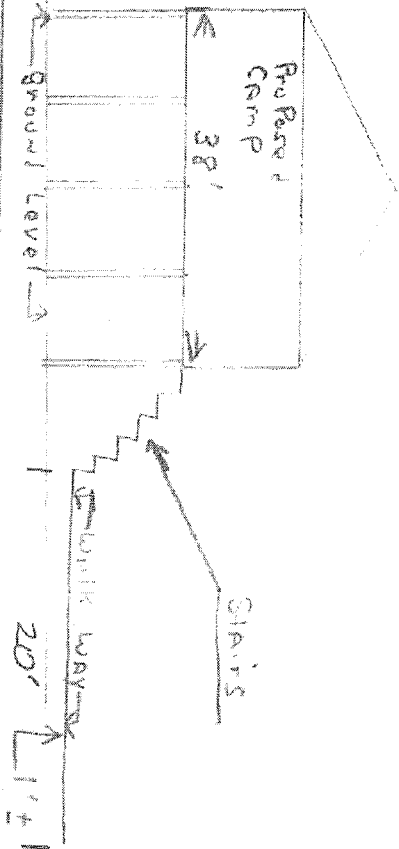


Cross Sections C-C

Proposed Dock

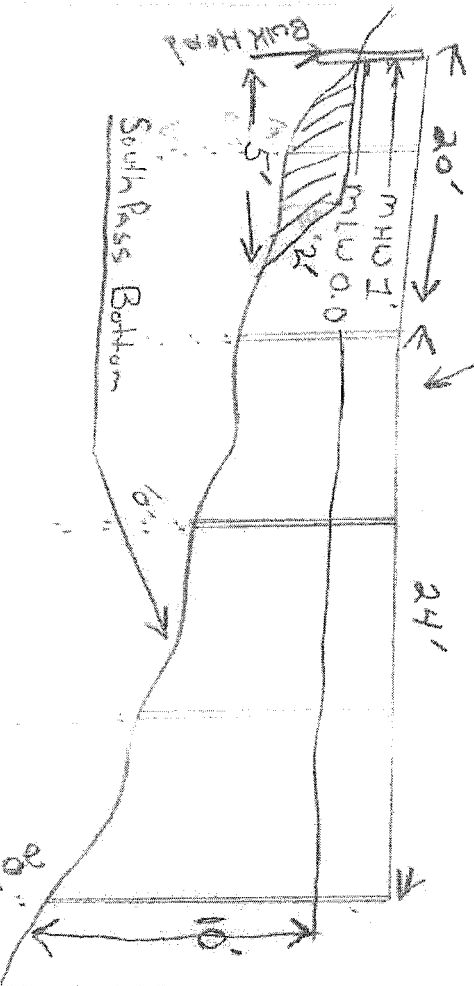


Cross Section B-B

Typical Sewer Line / TIE Back Trench

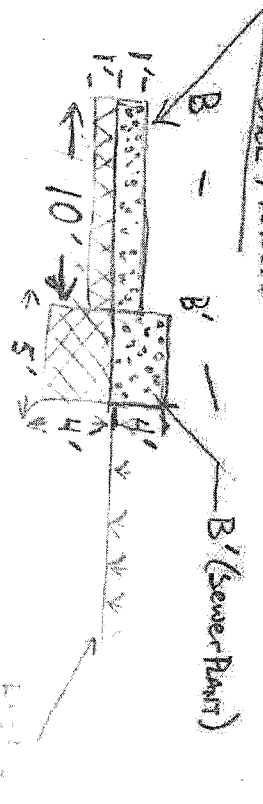


Dredge Area

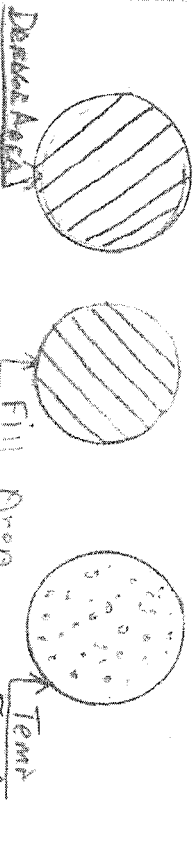

Cross Section D-D

Pump + Storage / Electric / Shed

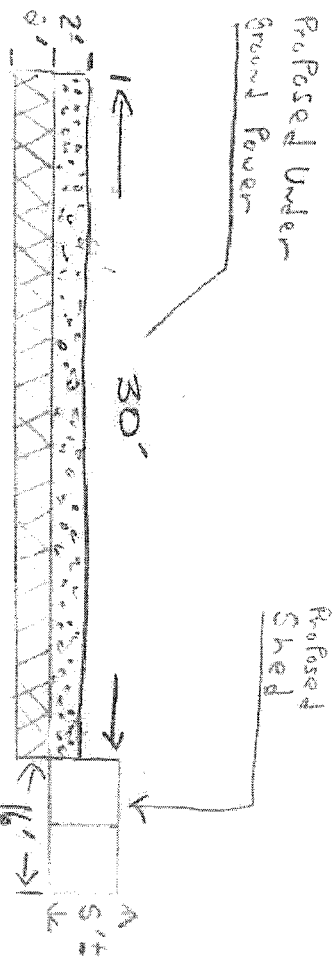

5.4 CY dredged + used fill

PROPOSED
FILL

5' MAX

DISTANCE TO OPPOSITE
BANK APPROX. (VARIES) 350'

2x12 CAP

PROPOSED BULKHEAD

5' MAX

EXISTING
GRADE

MHW 1'

2' 0"

M L W 0.0'

Average
Water
Depth
2 ft

SHEET PILING

PILING (10')

5' max

E-E

SECTION - BULKHEAD