Two-view geometry

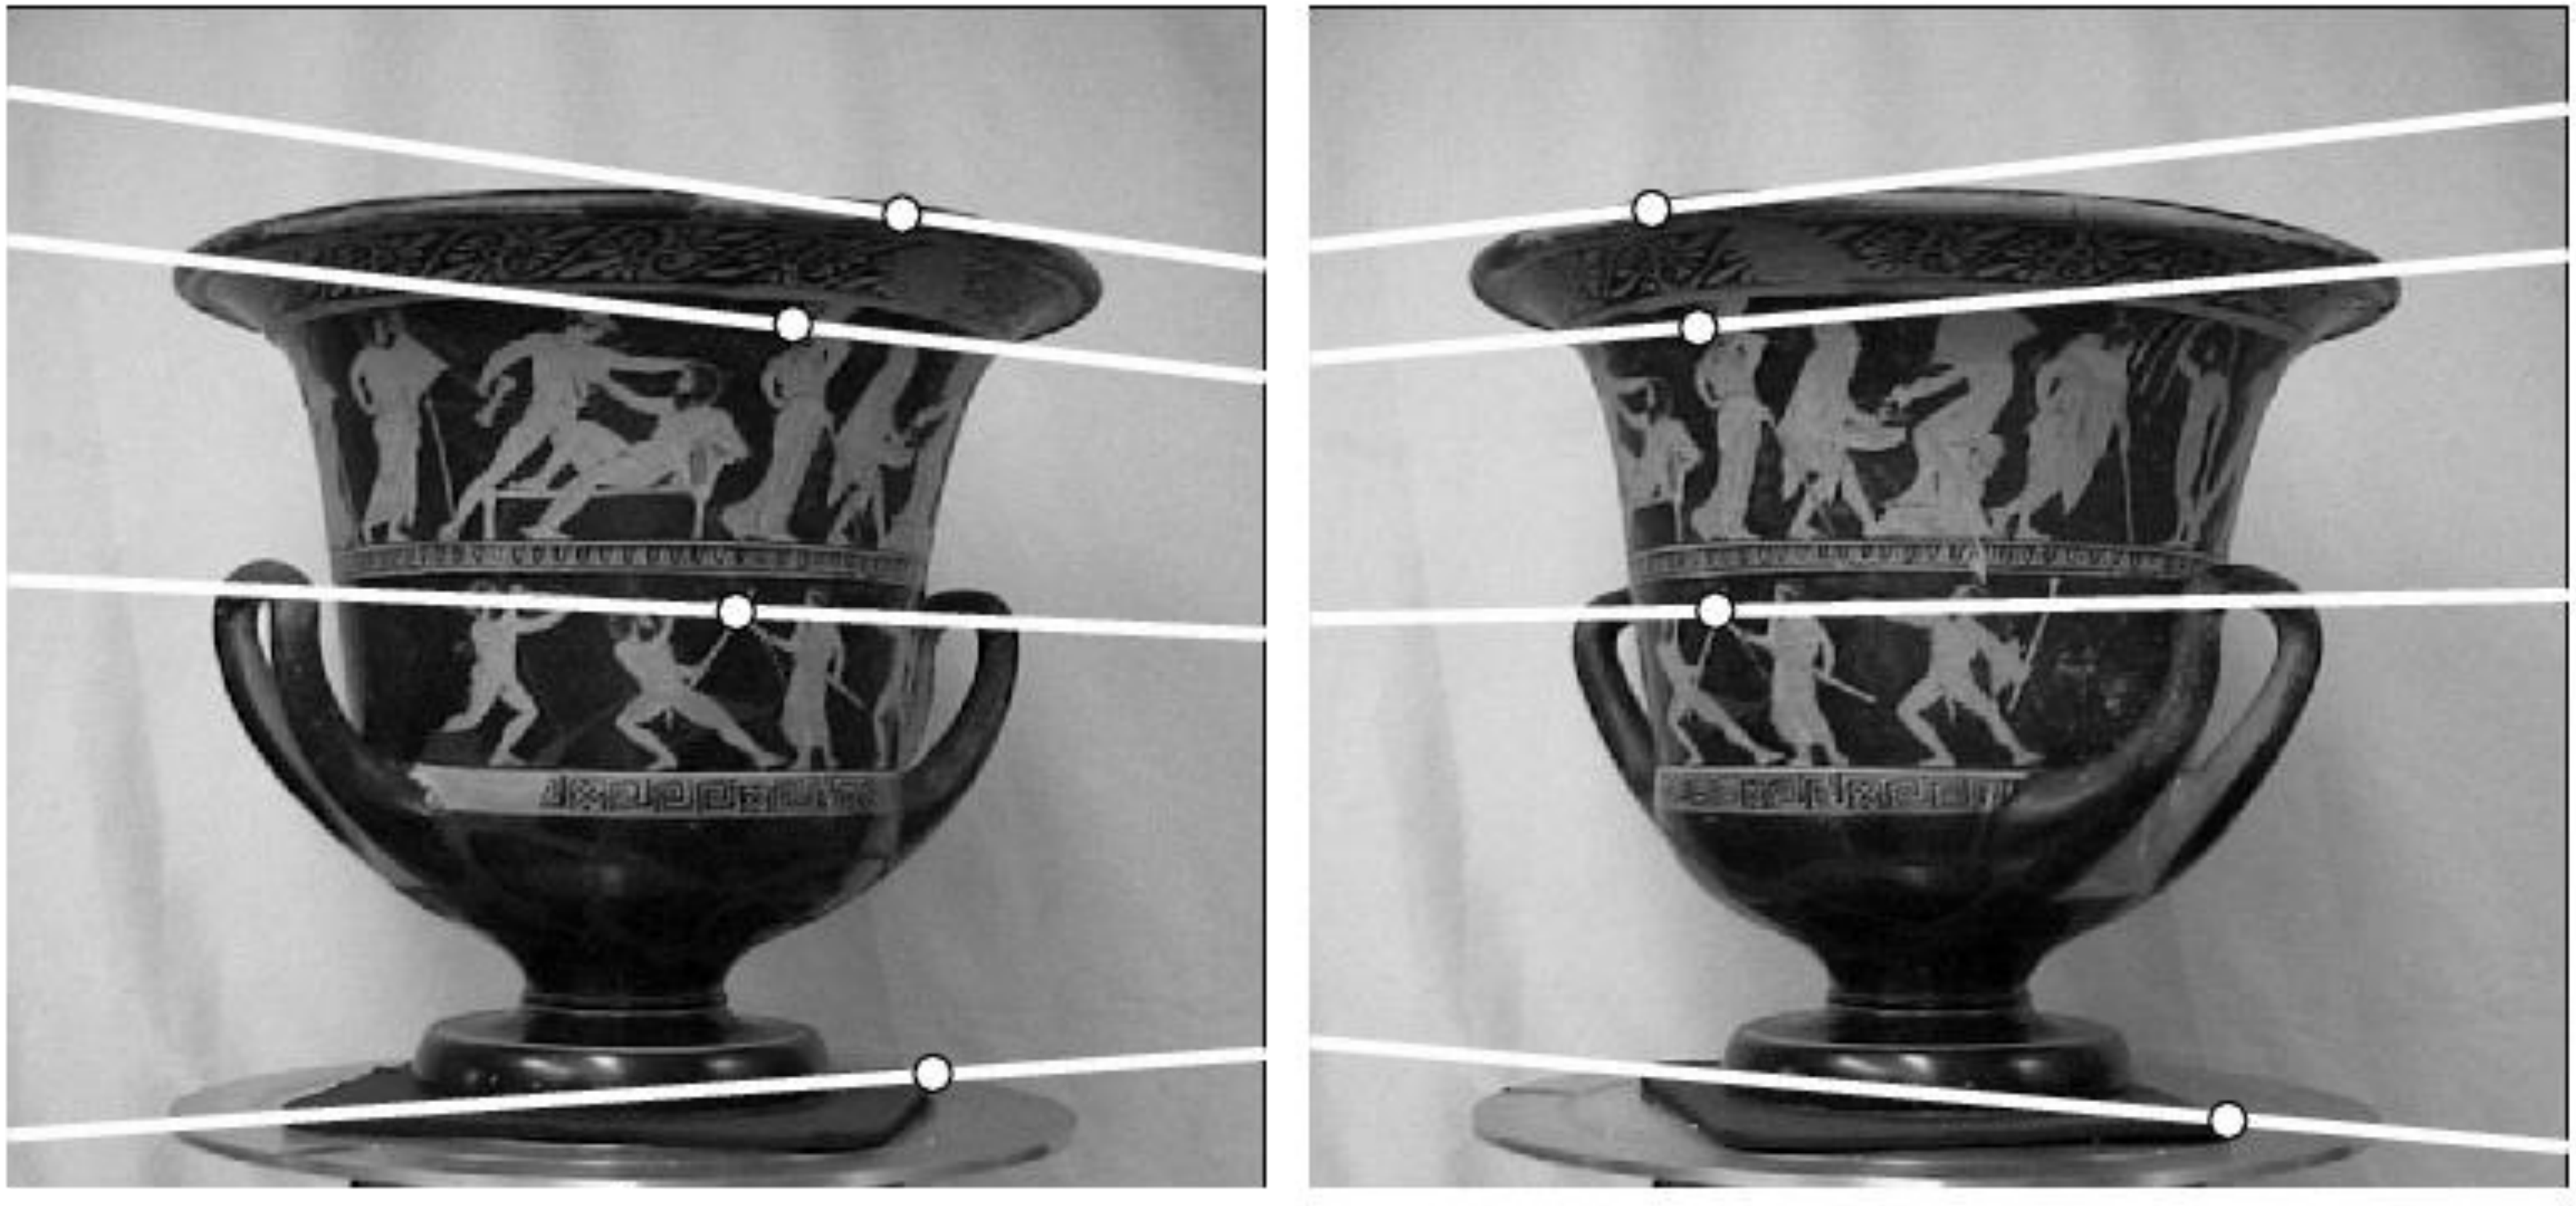

Epipolar geometry

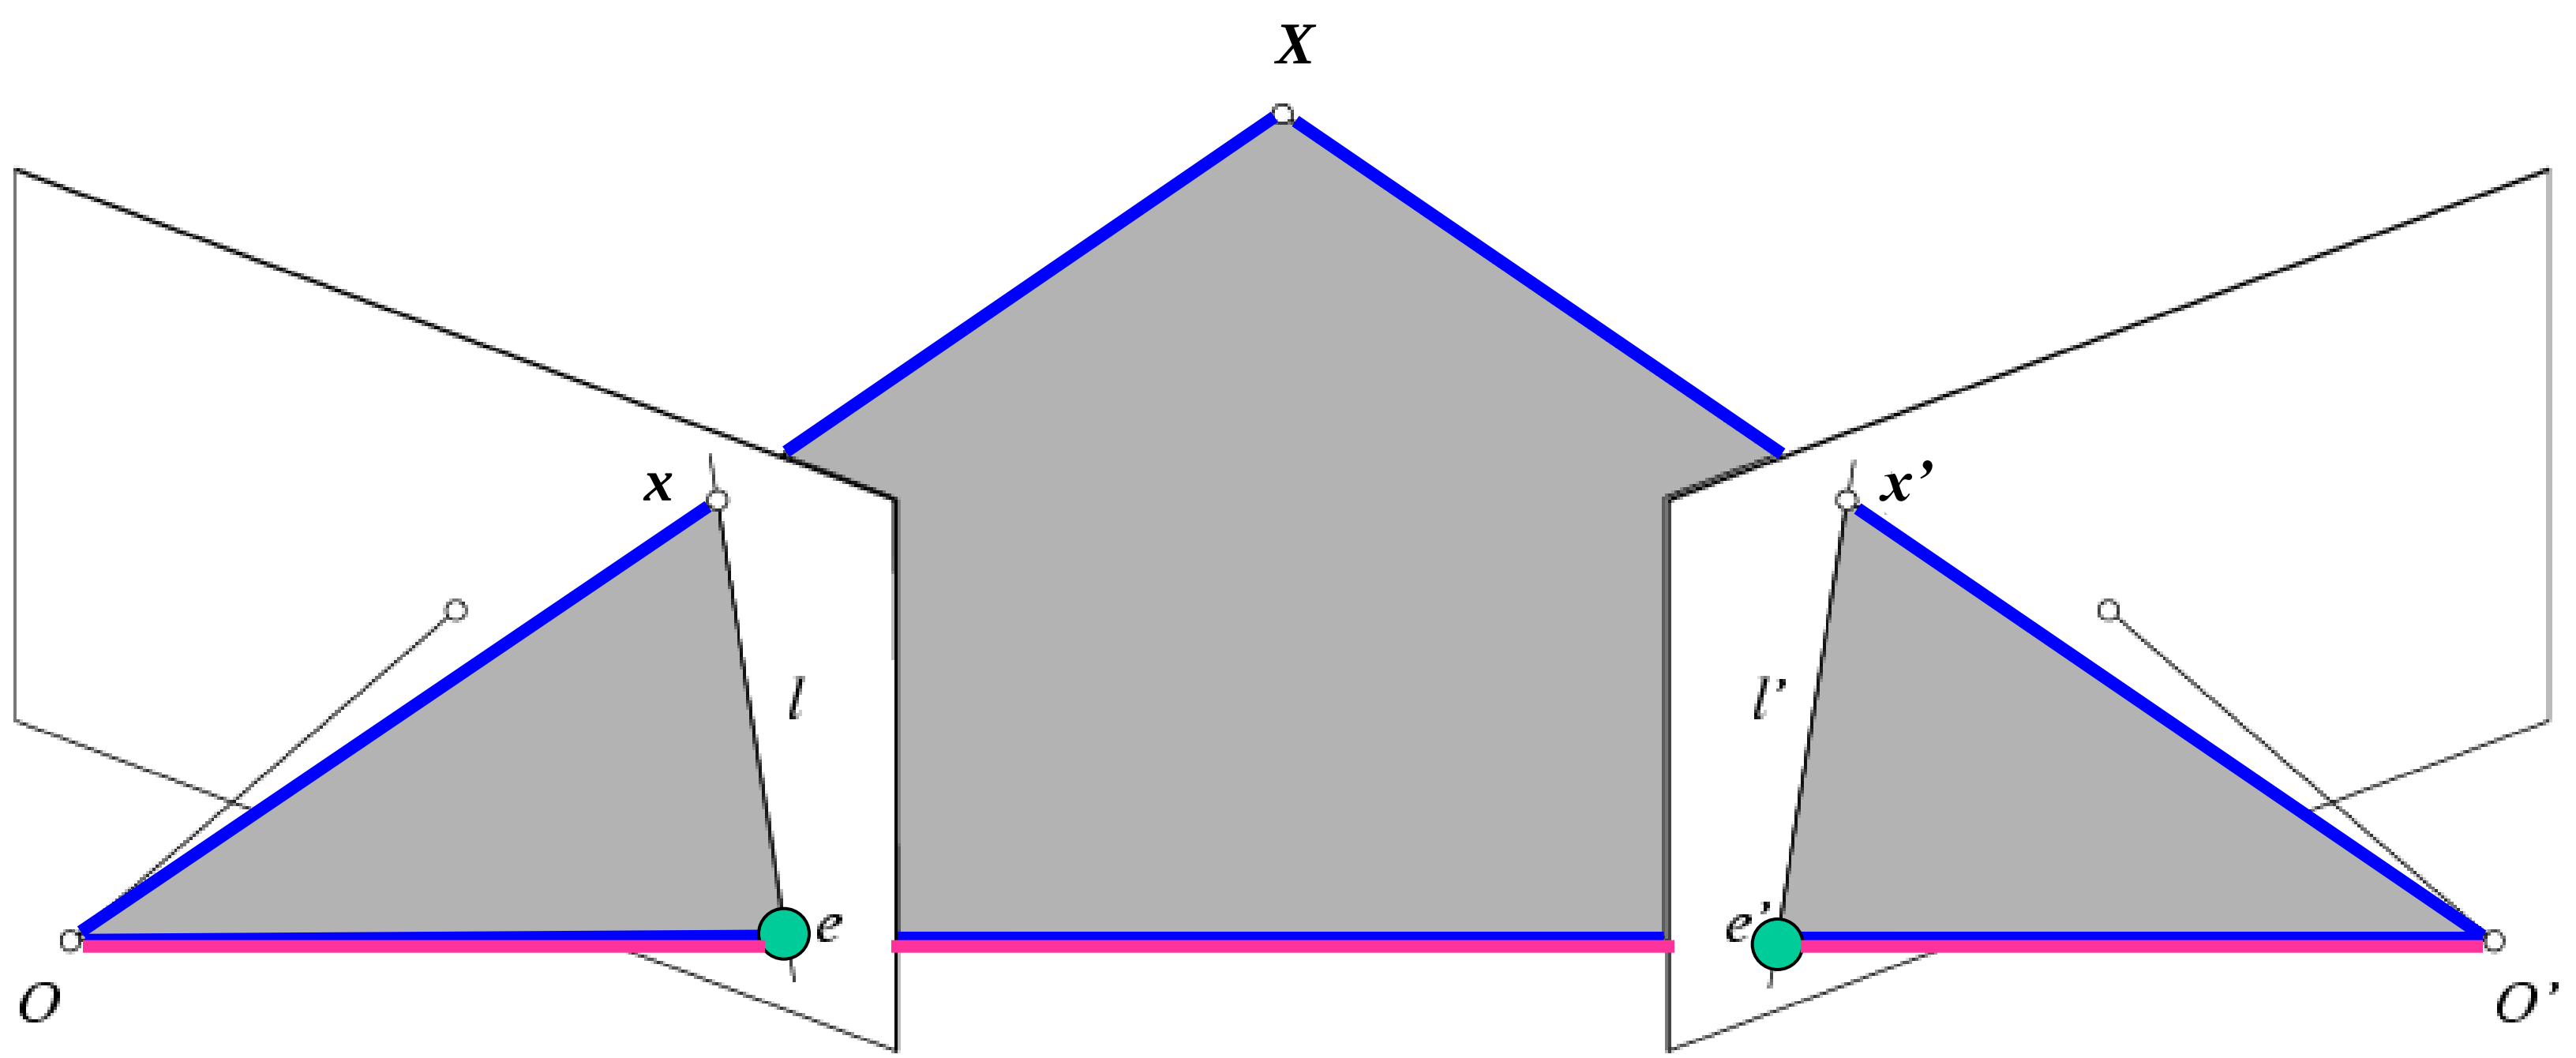

- **Baseline** – line connecting the two camera centers
- **Epipolar Plane** – plane containing baseline (1D family)
- **Epipoles**

= intersections of baseline with image planes

= projections of the other camera center

The Epipole

Photo by Frank Dellaert

Epipolar geometry

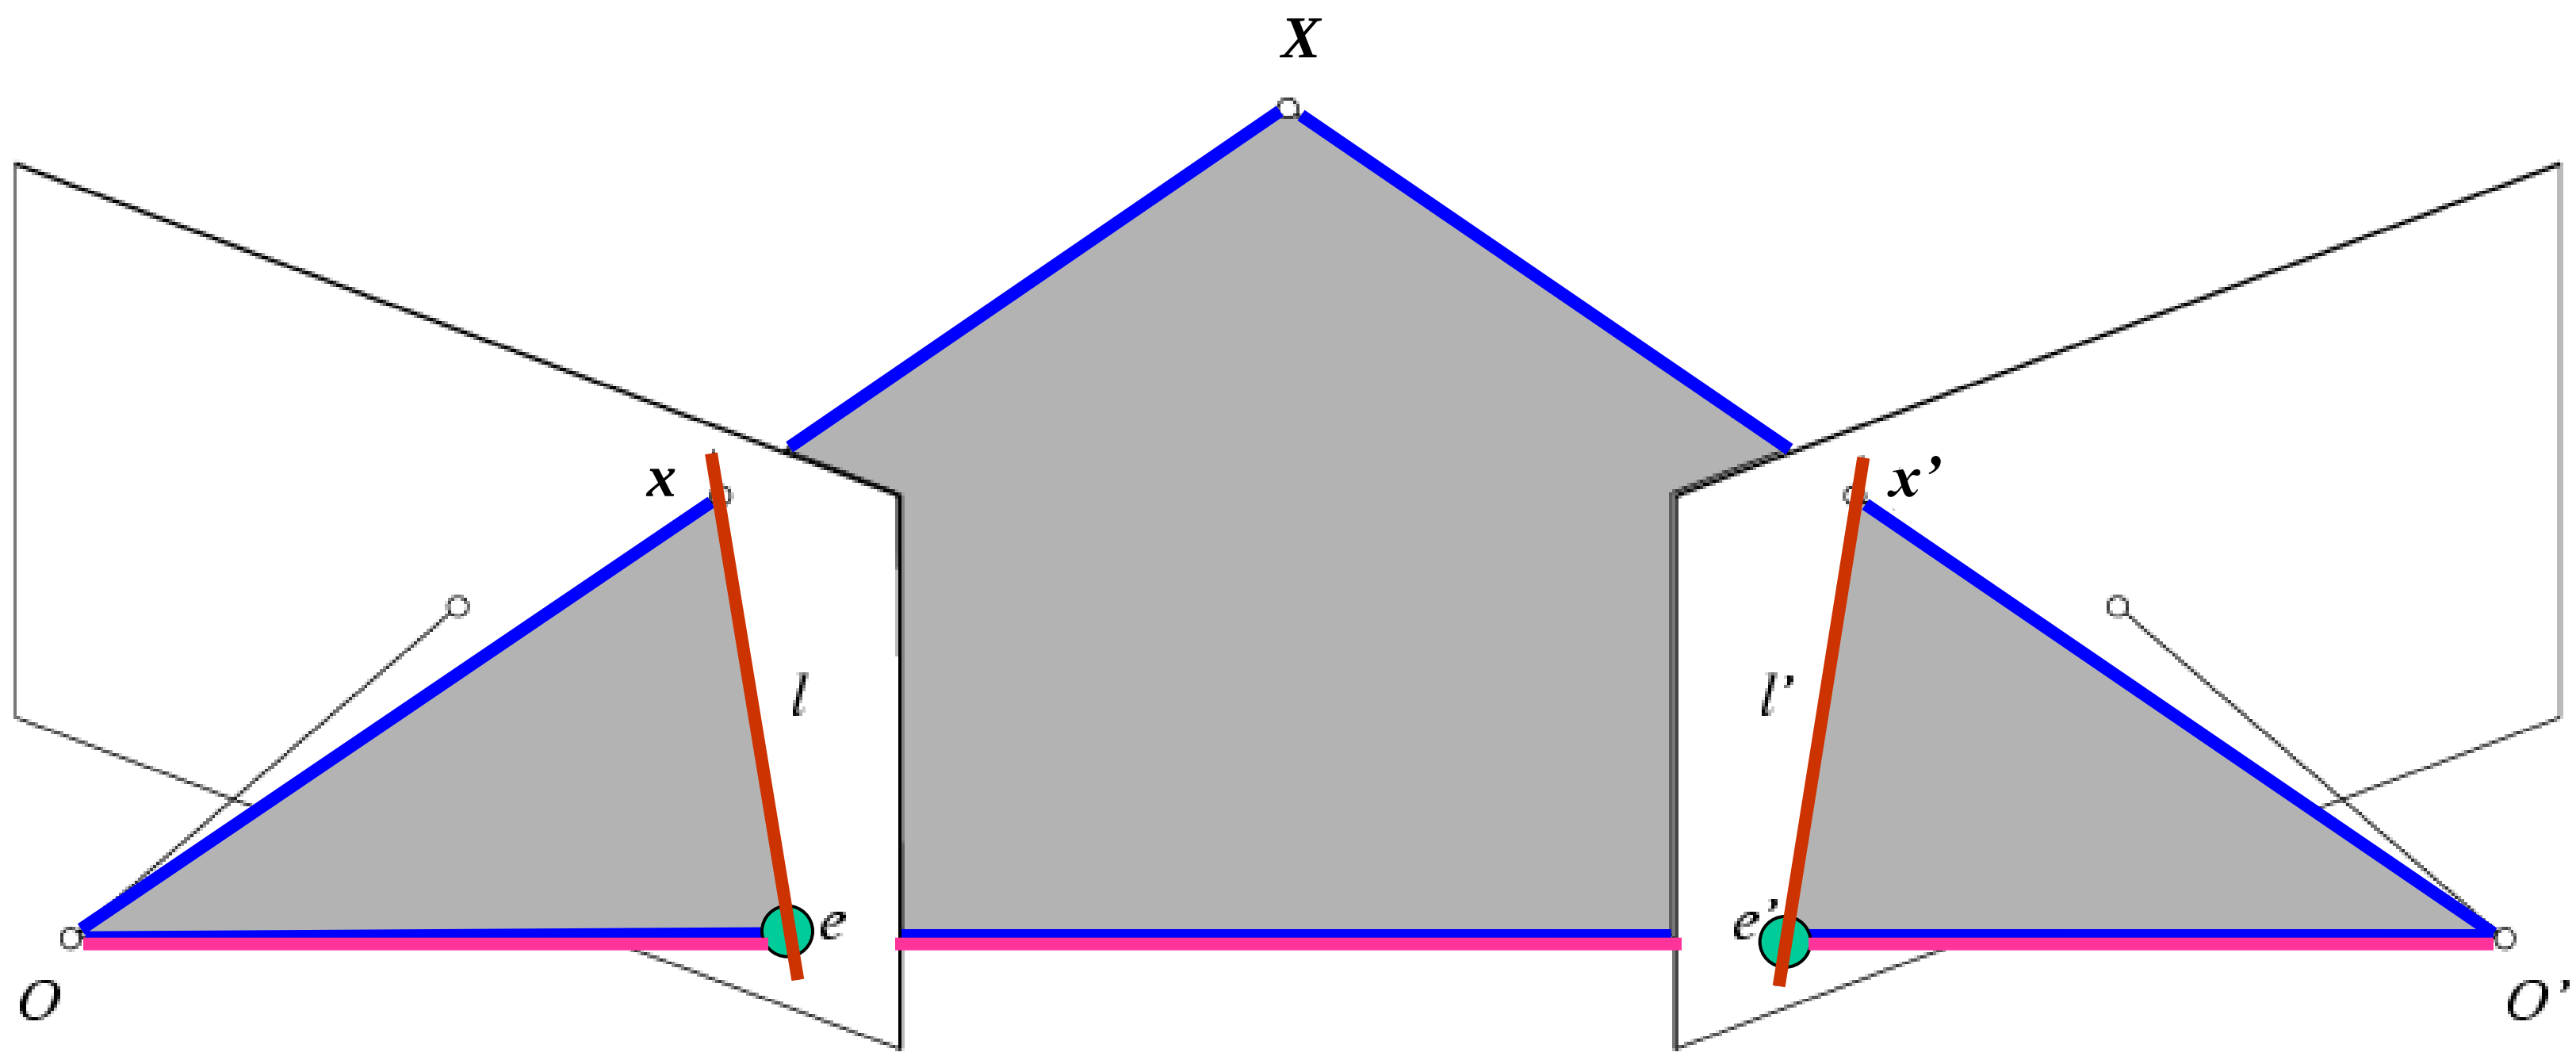

- **Baseline** – line connecting the two camera centers
- **Epipolar Plane** – plane containing baseline (1D family)
- **Epipoles**
  = intersections of baseline with image planes
  = projections of the other camera center
- **Epipolar Lines** - intersections of epipolar plane with image planes (always come in corresponding pairs)

Example: Converging cameras

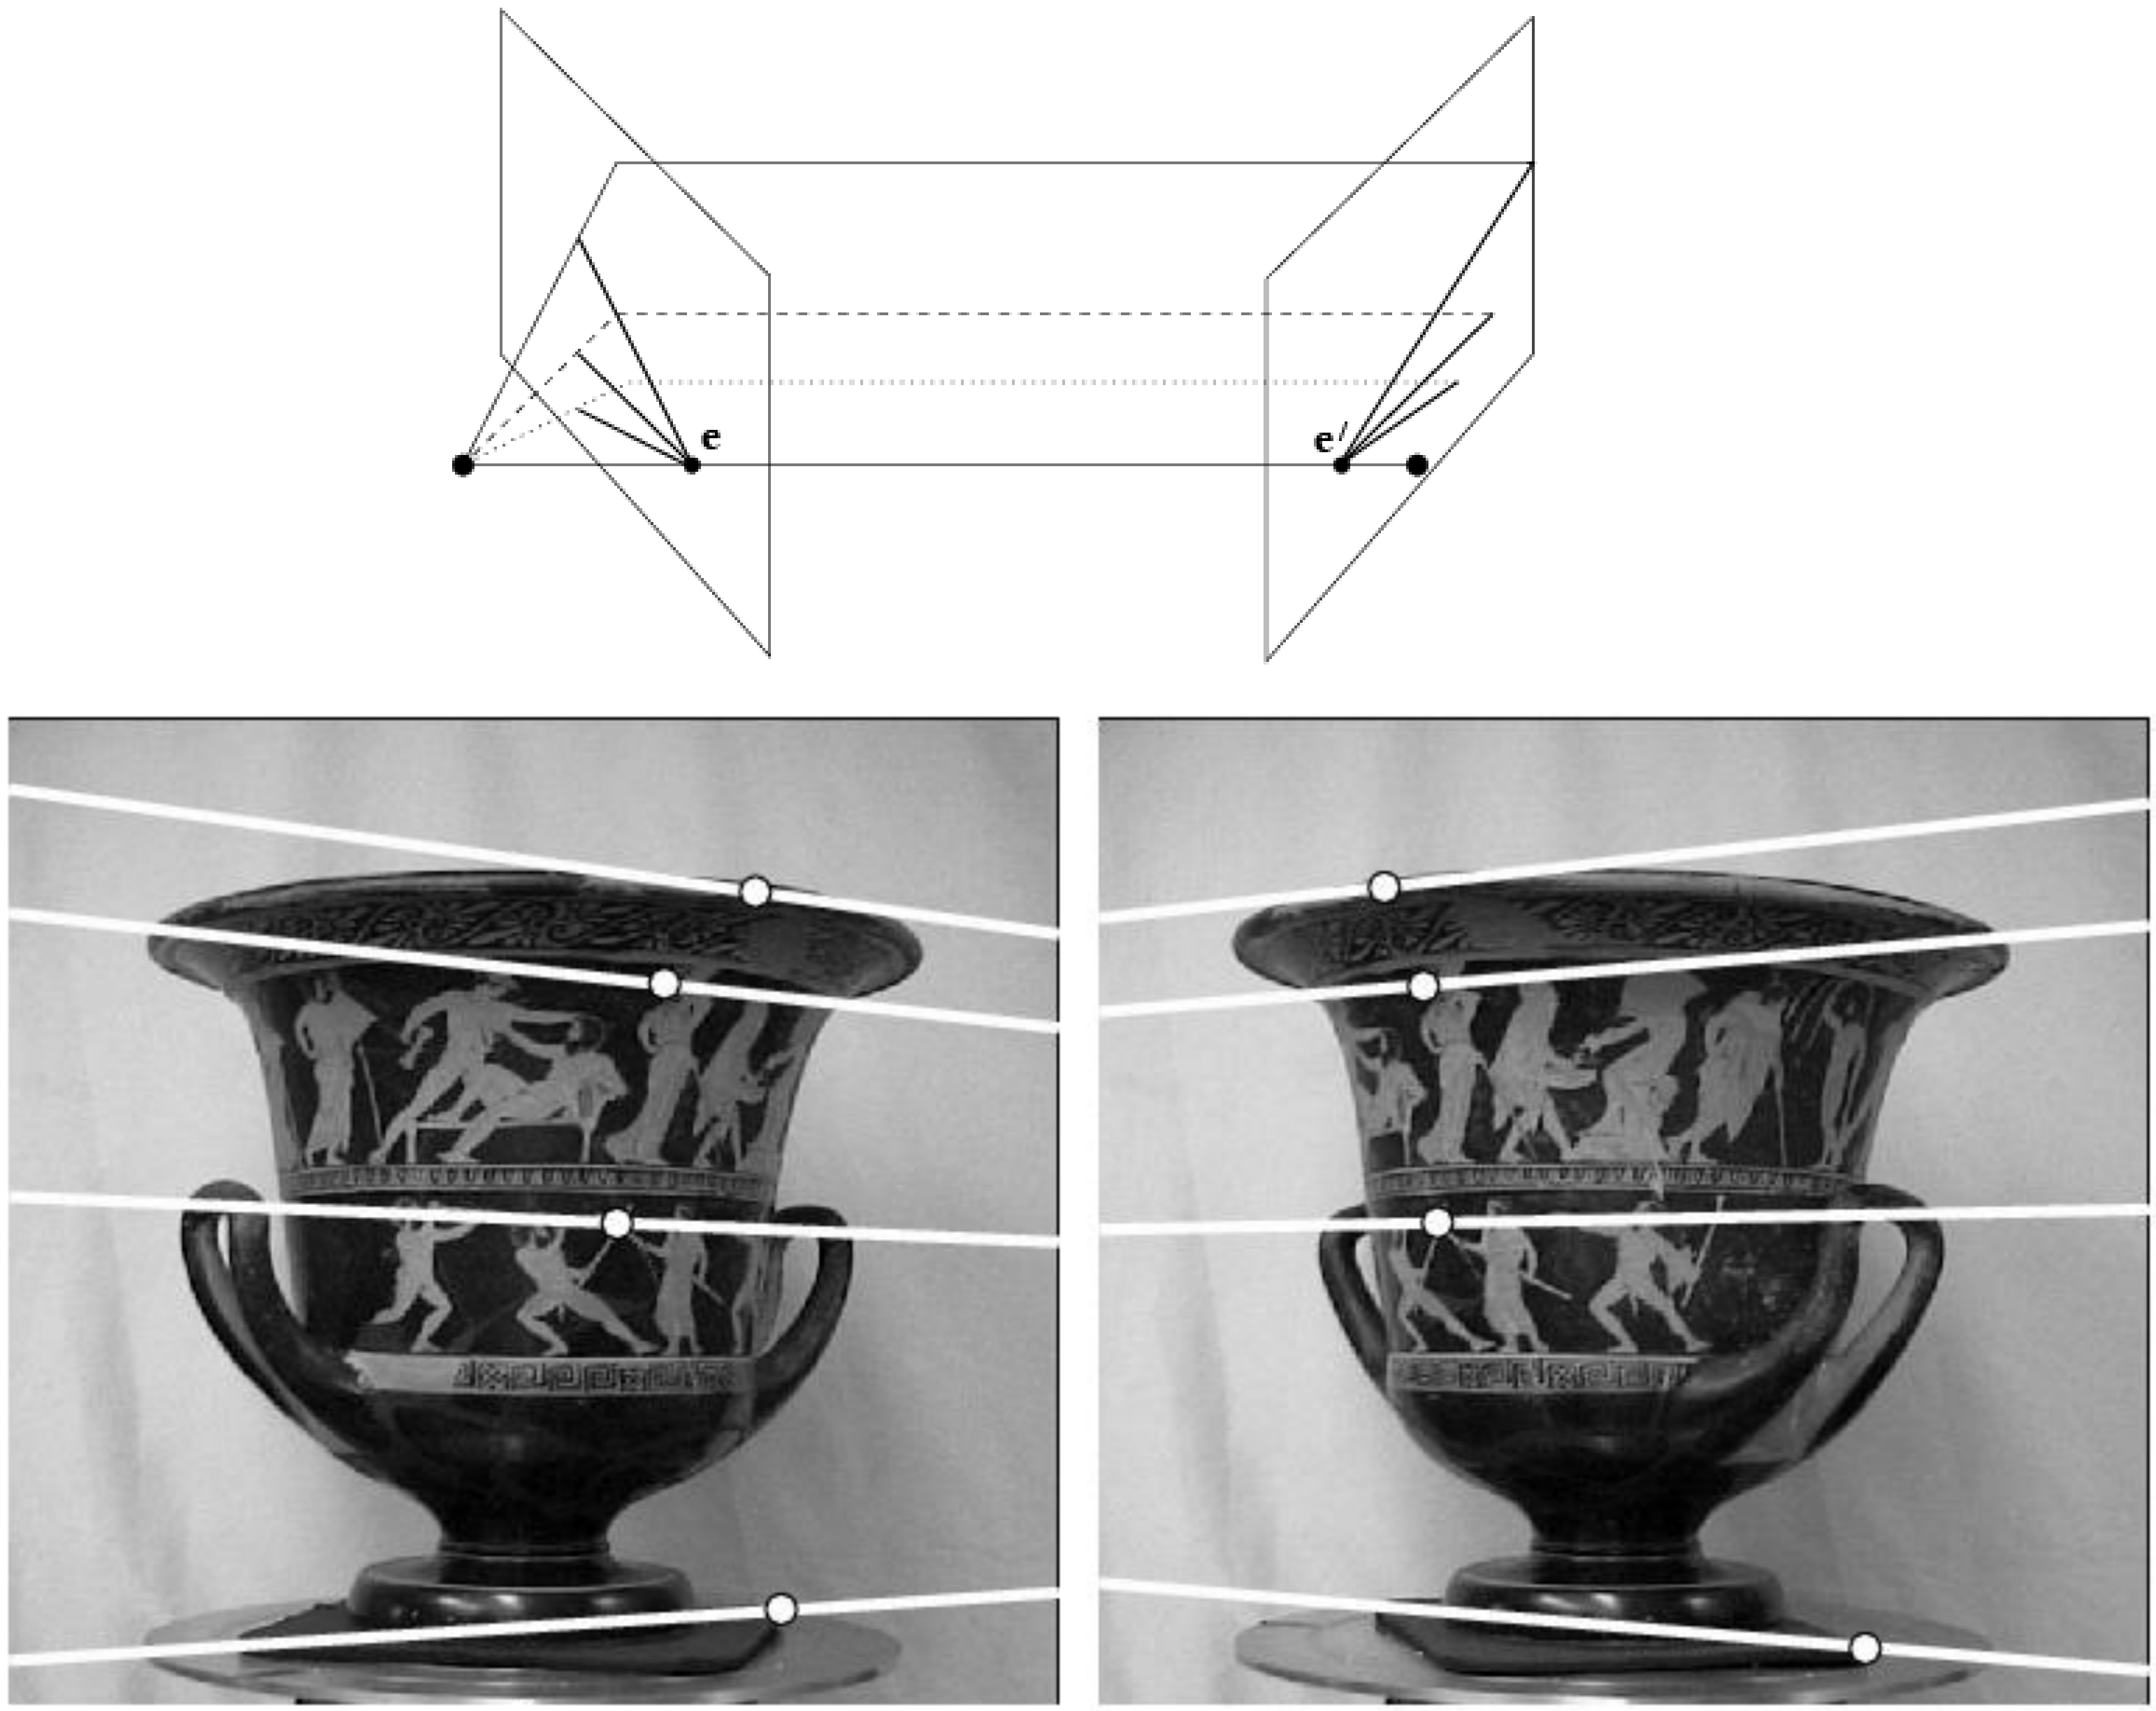

Example: Motion parallel to image plane

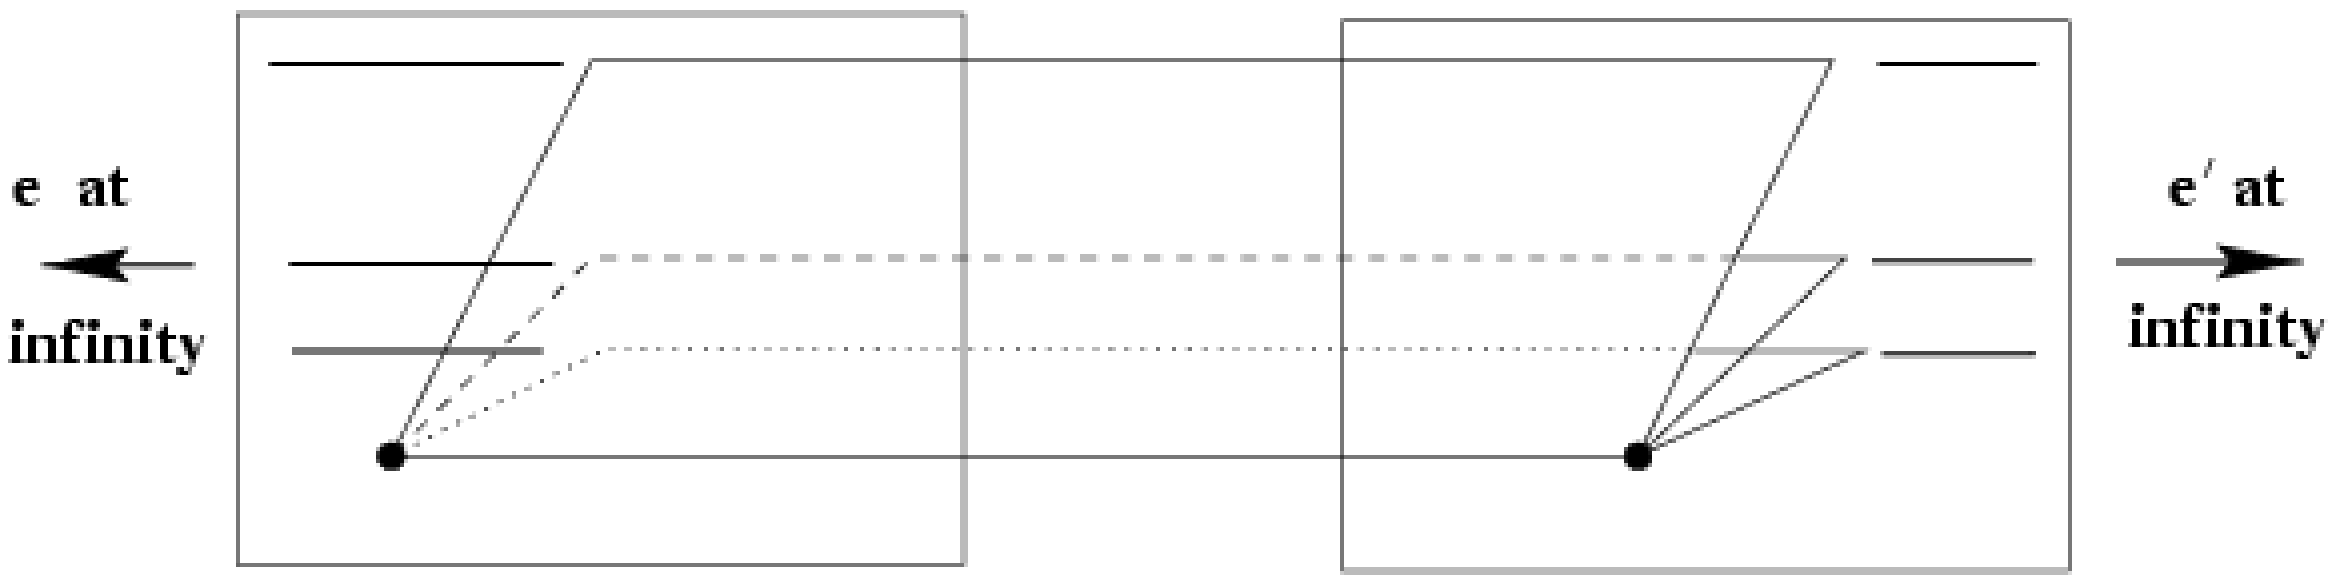

Example: Motion perpendicular to image plane

Example: Motion perpendicular to image plane

Example: Motion perpendicular to image plane

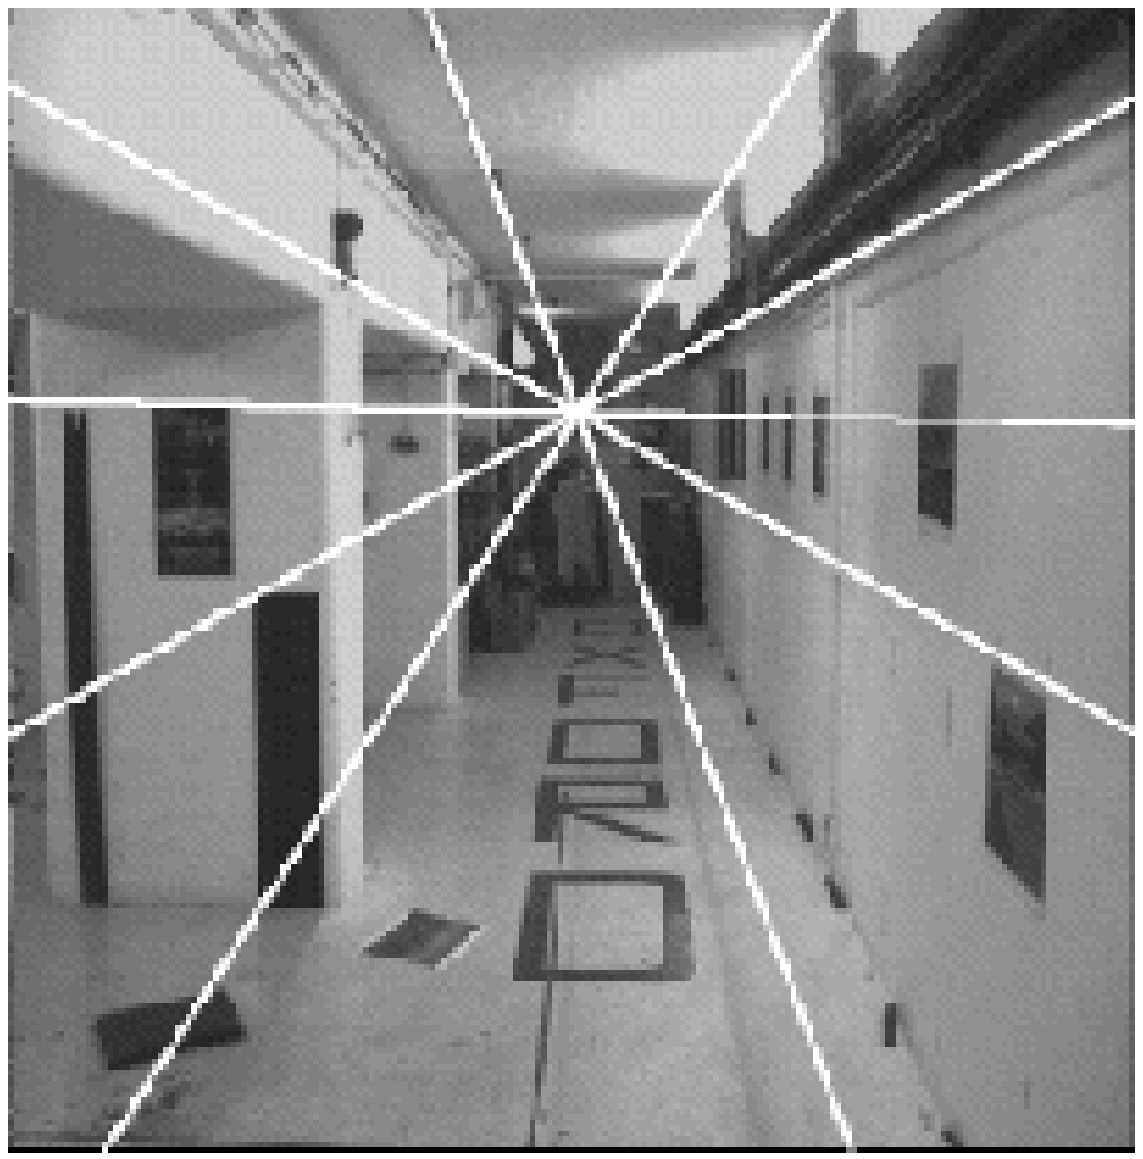

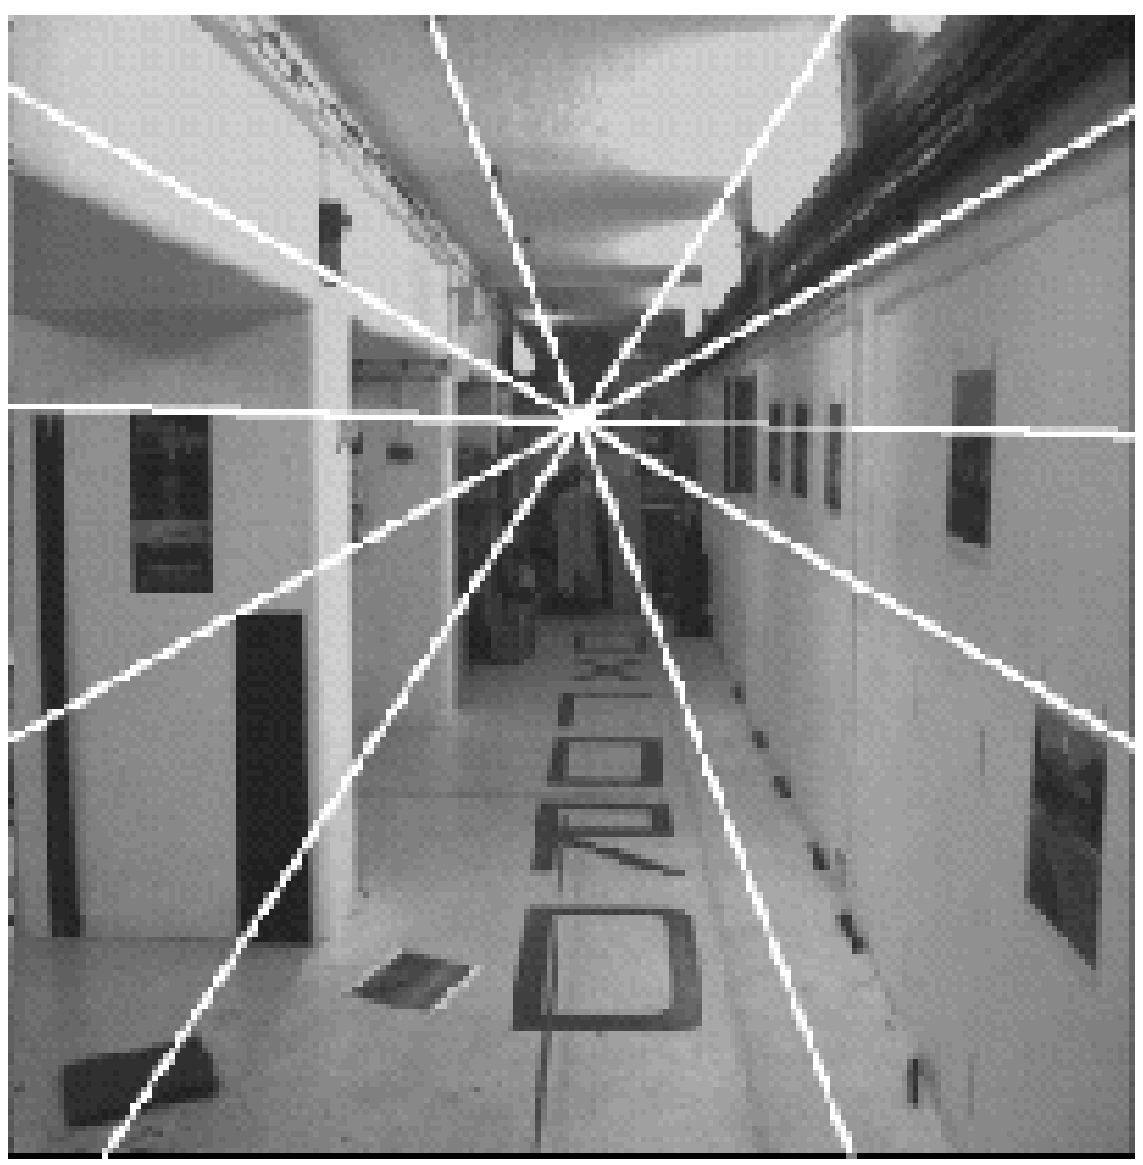

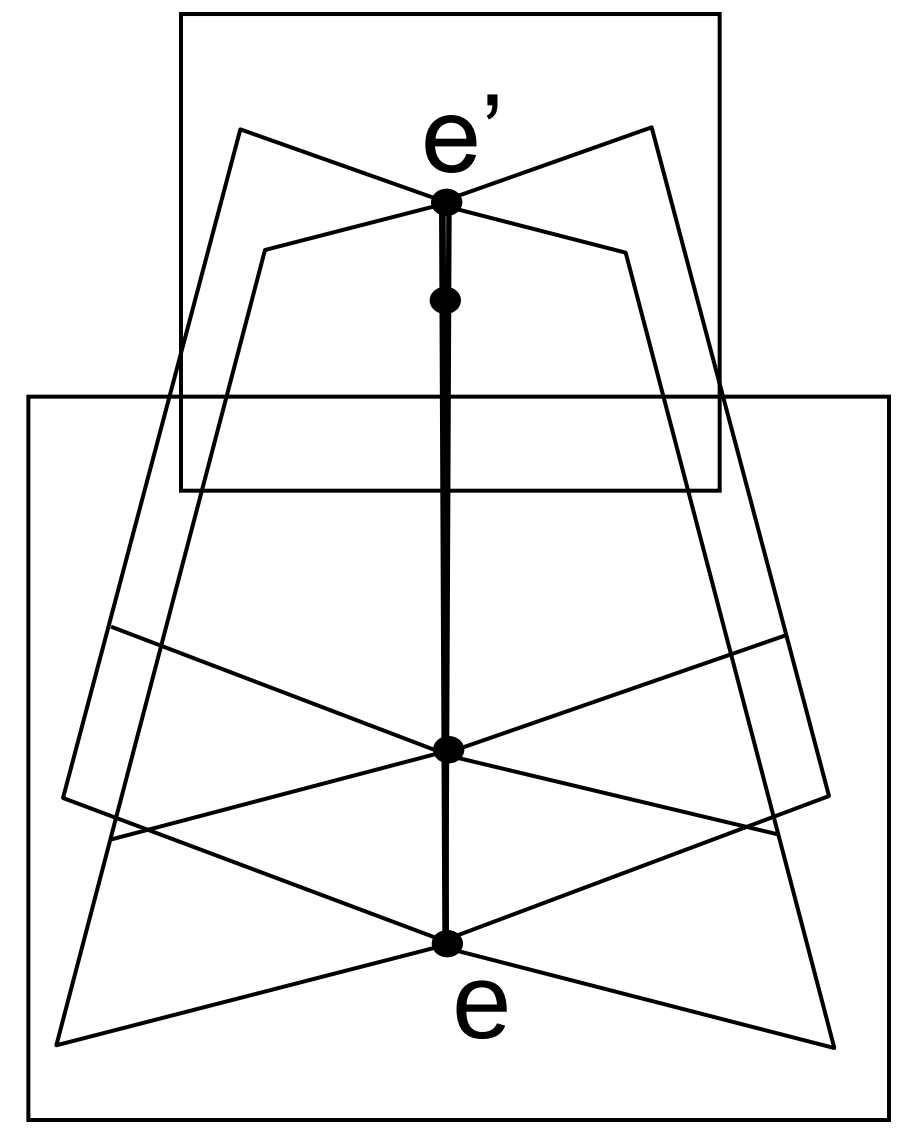

Epipole has same coordinates in both images.
Points move along lines radiating from e: "Focus of expansion"

Epipolar constraint

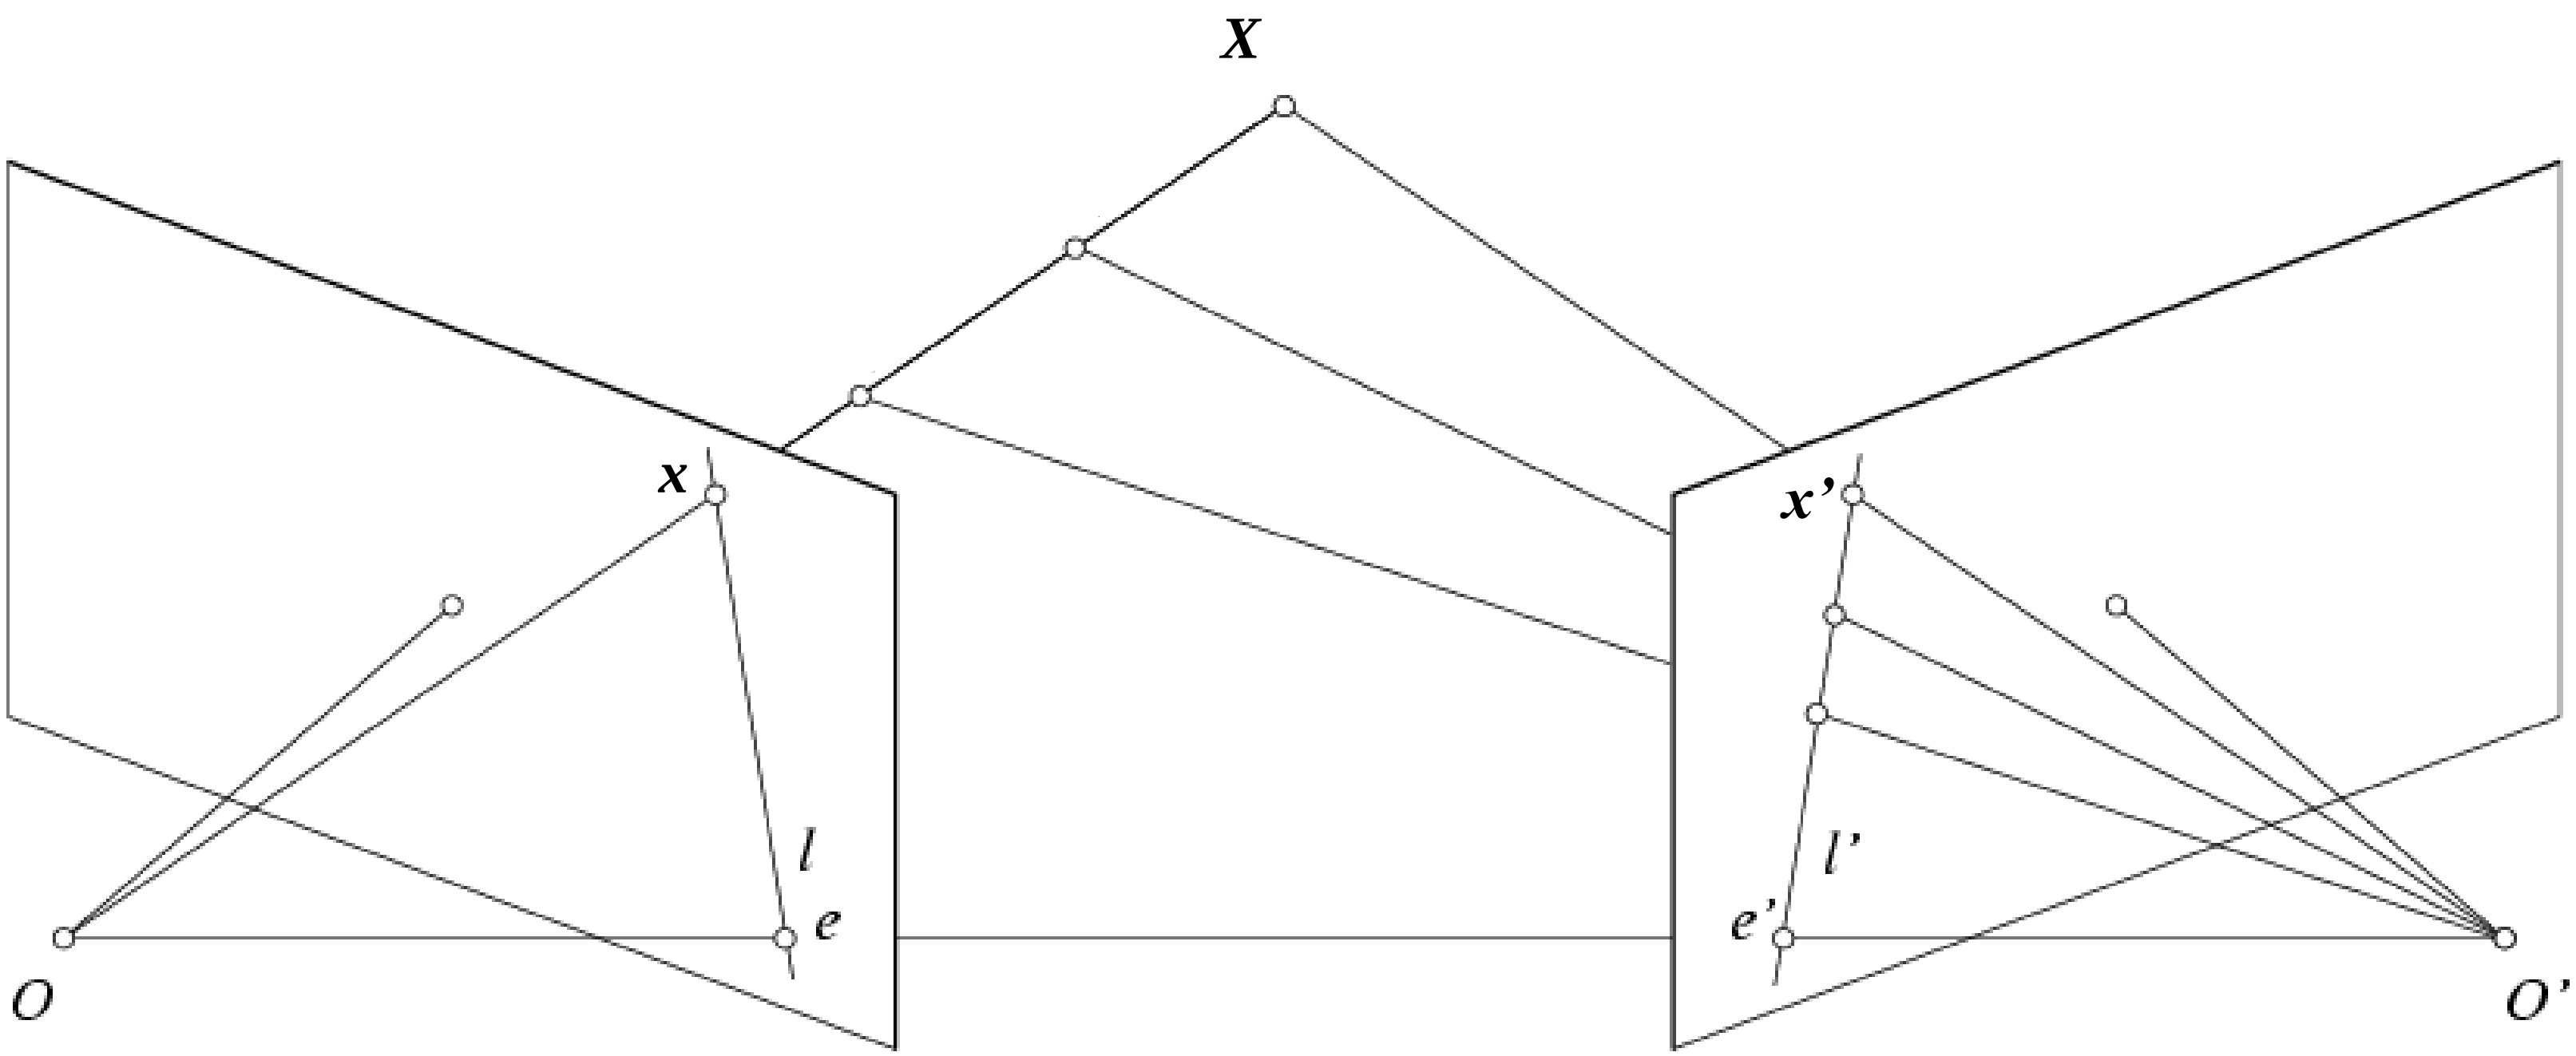

- If we observe a point x in one image, where can the corresponding point x' be in the other image?

Epipolar constraint

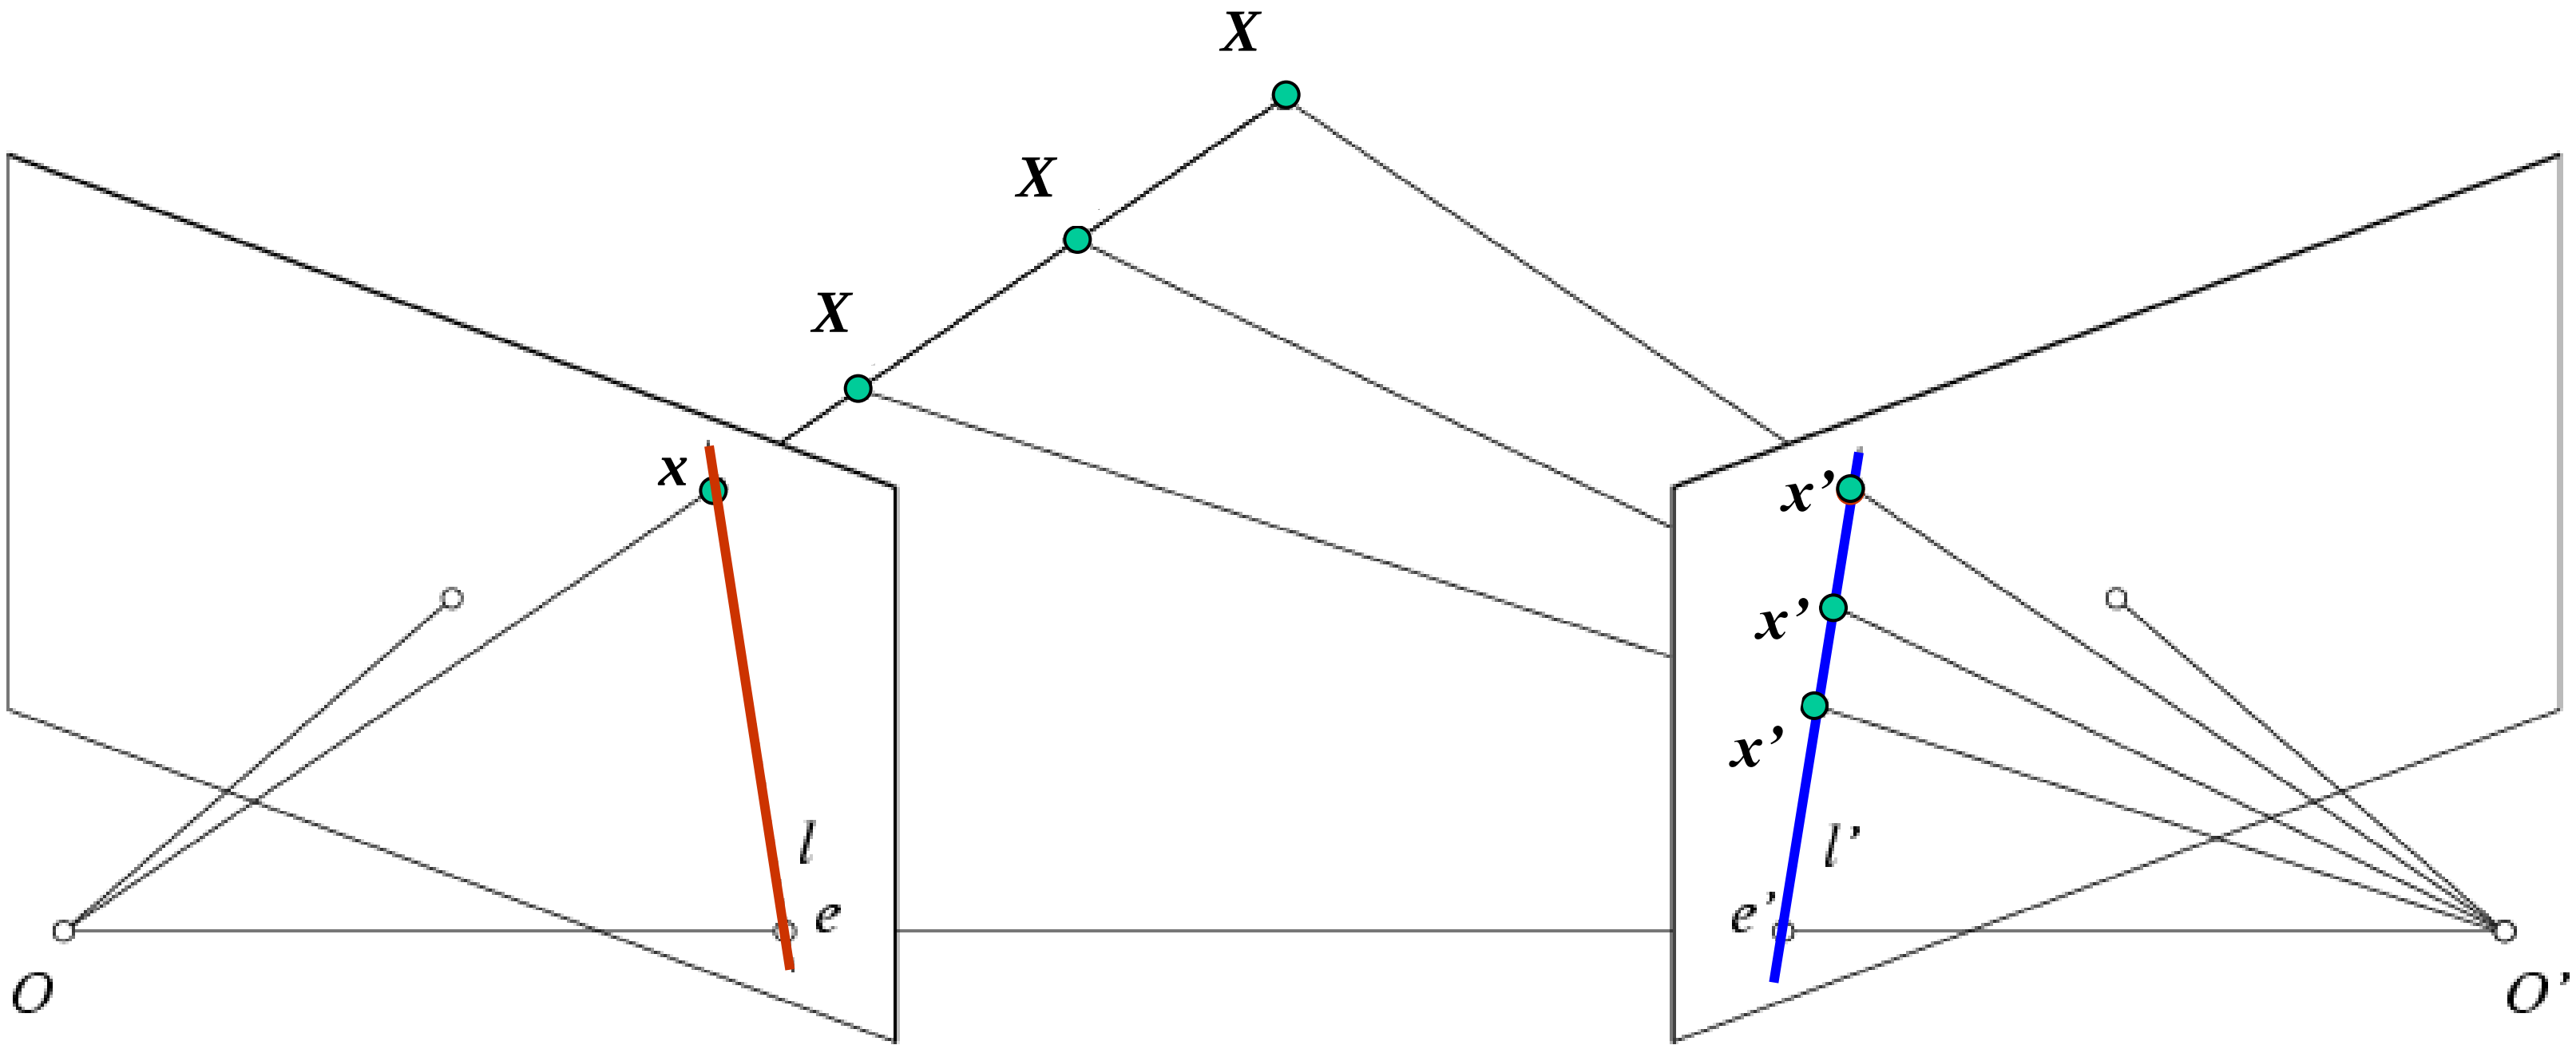

- Potential matches for *x* have to lie on the corresponding epipolar line *l'*.

- Potential matches for *x'* have to lie on the corresponding epipolar line *l*.

Epipolar constraint example

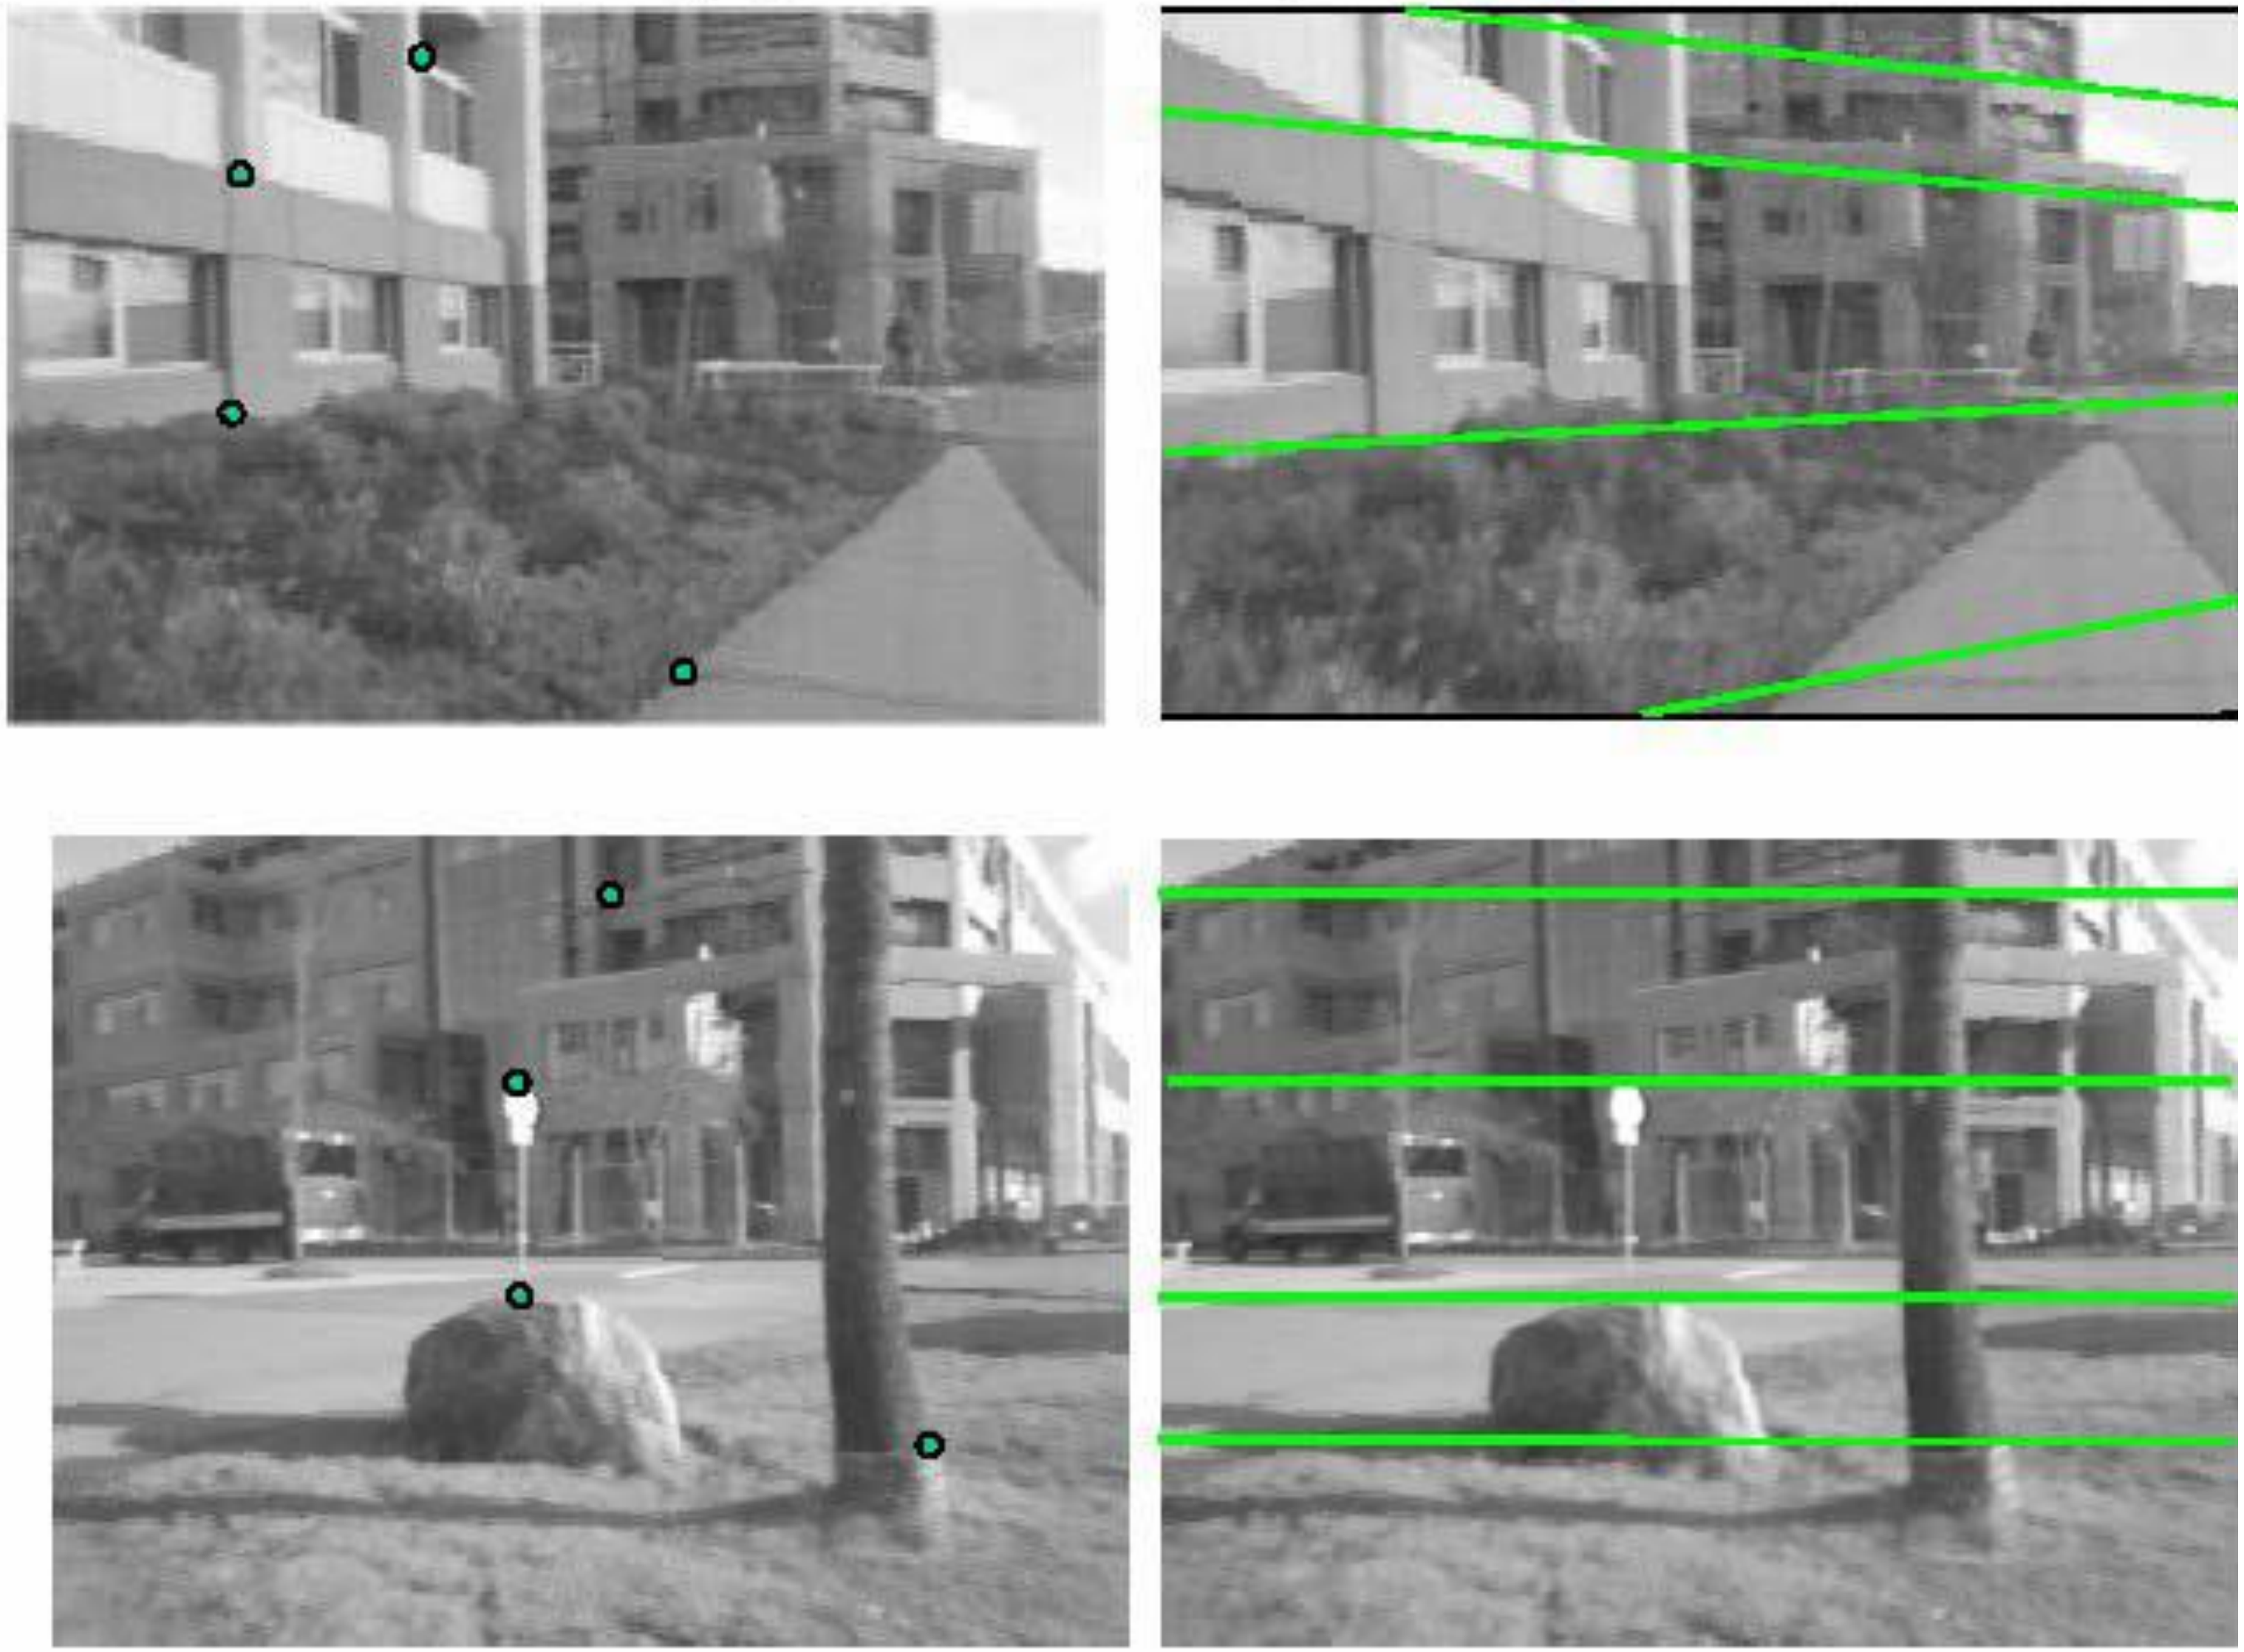

Epipolar constraint: Calibrated case

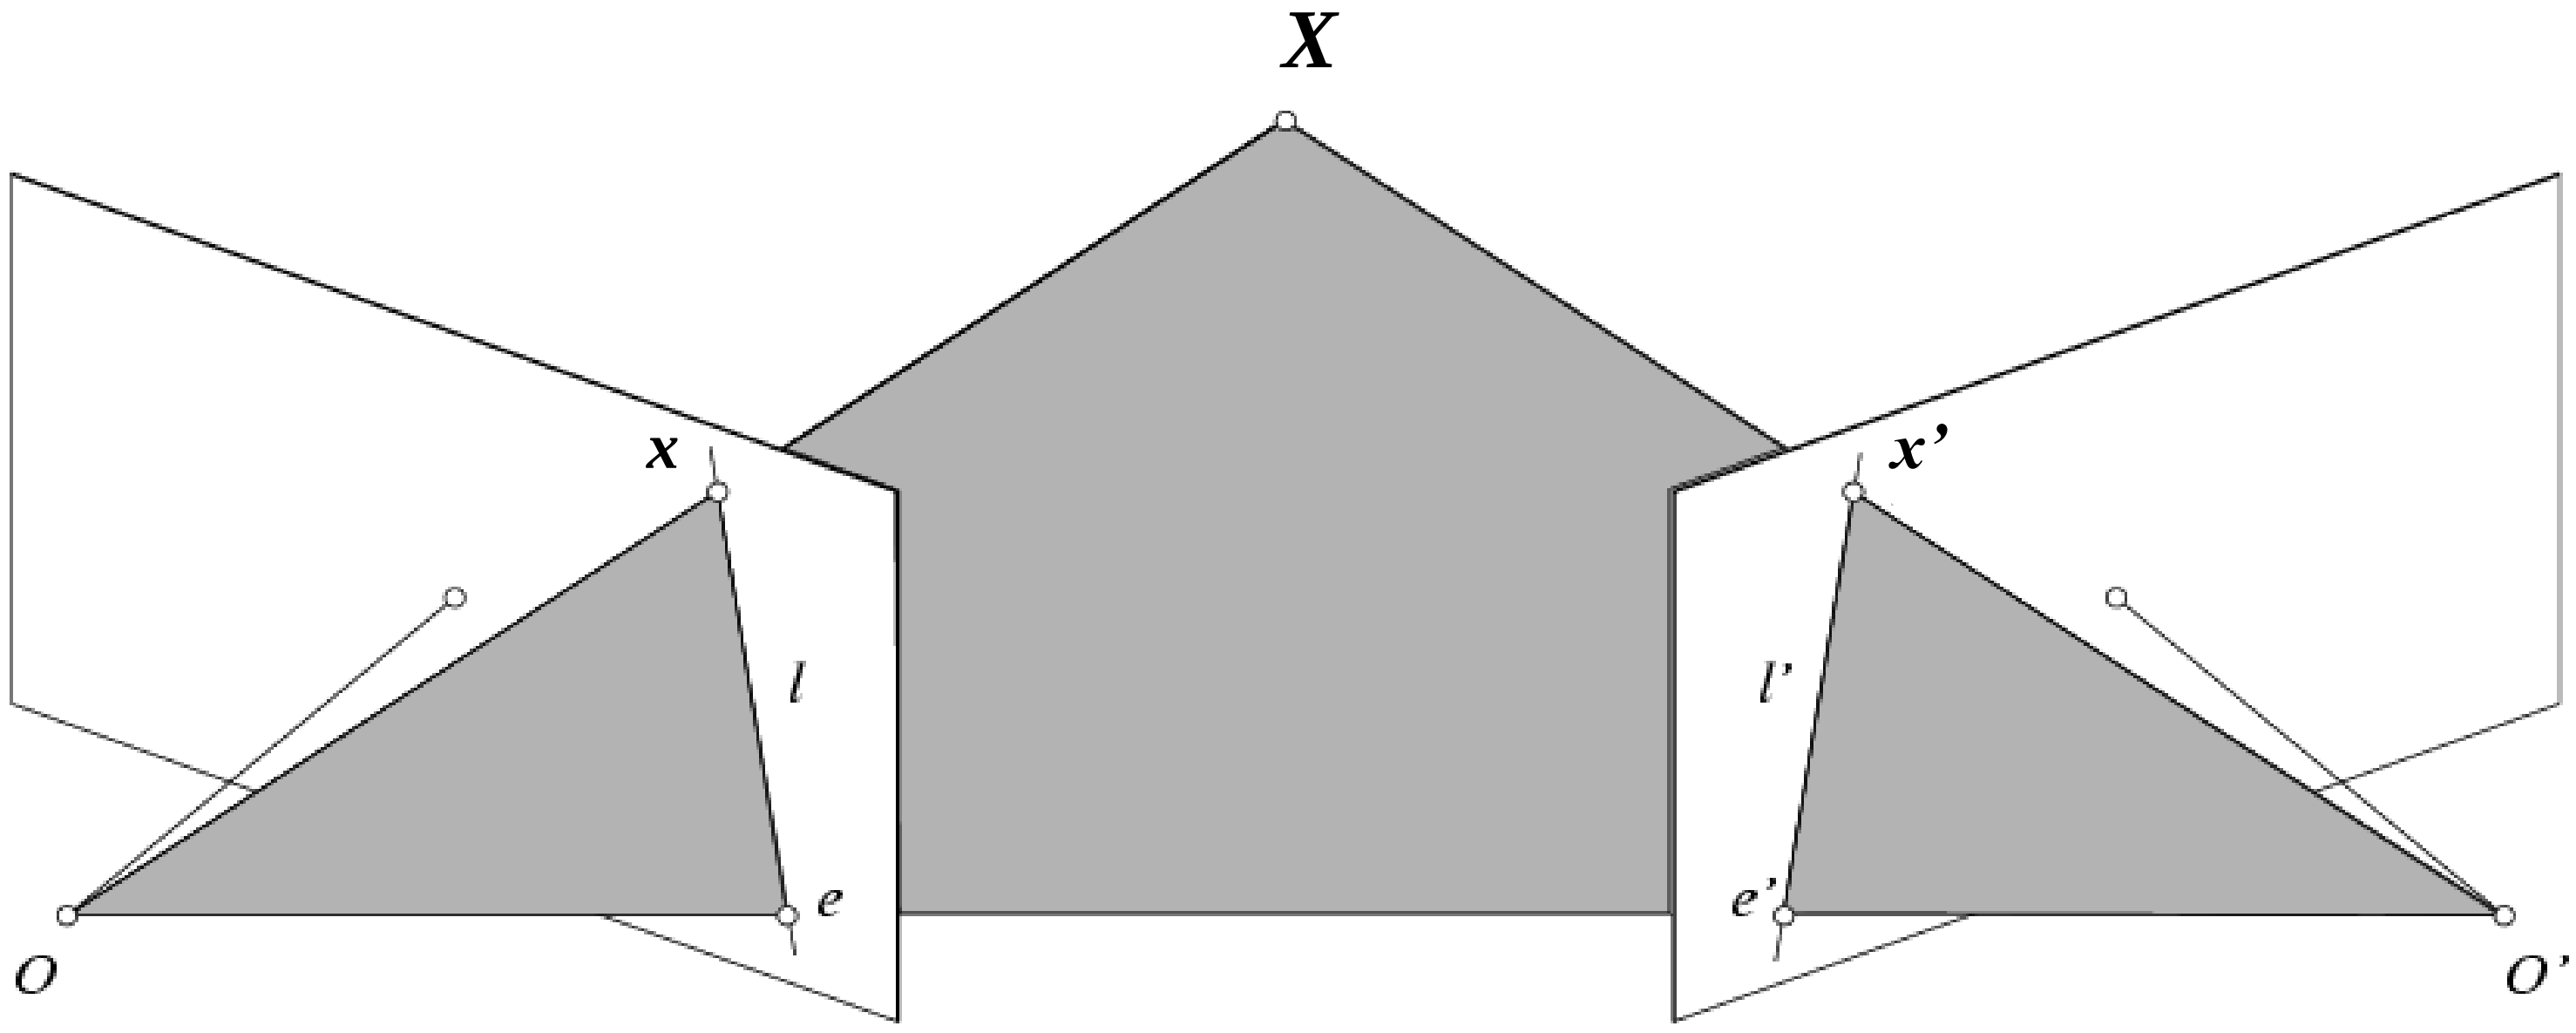

- Assume that the intrinsic and extrinsic parameters of the cameras are known
- We can multiply the projection matrix of each camera (and the image points) by the inverse of the calibration matrix to get *normalized* image coordinates
- We can also set the global coordinate system to the coordinate system of the first camera. Then the projection matrix of the first camera is $[\mathbf{I} \mid \mathbf{0}]$.

Epipolar constraint: Calibrated case

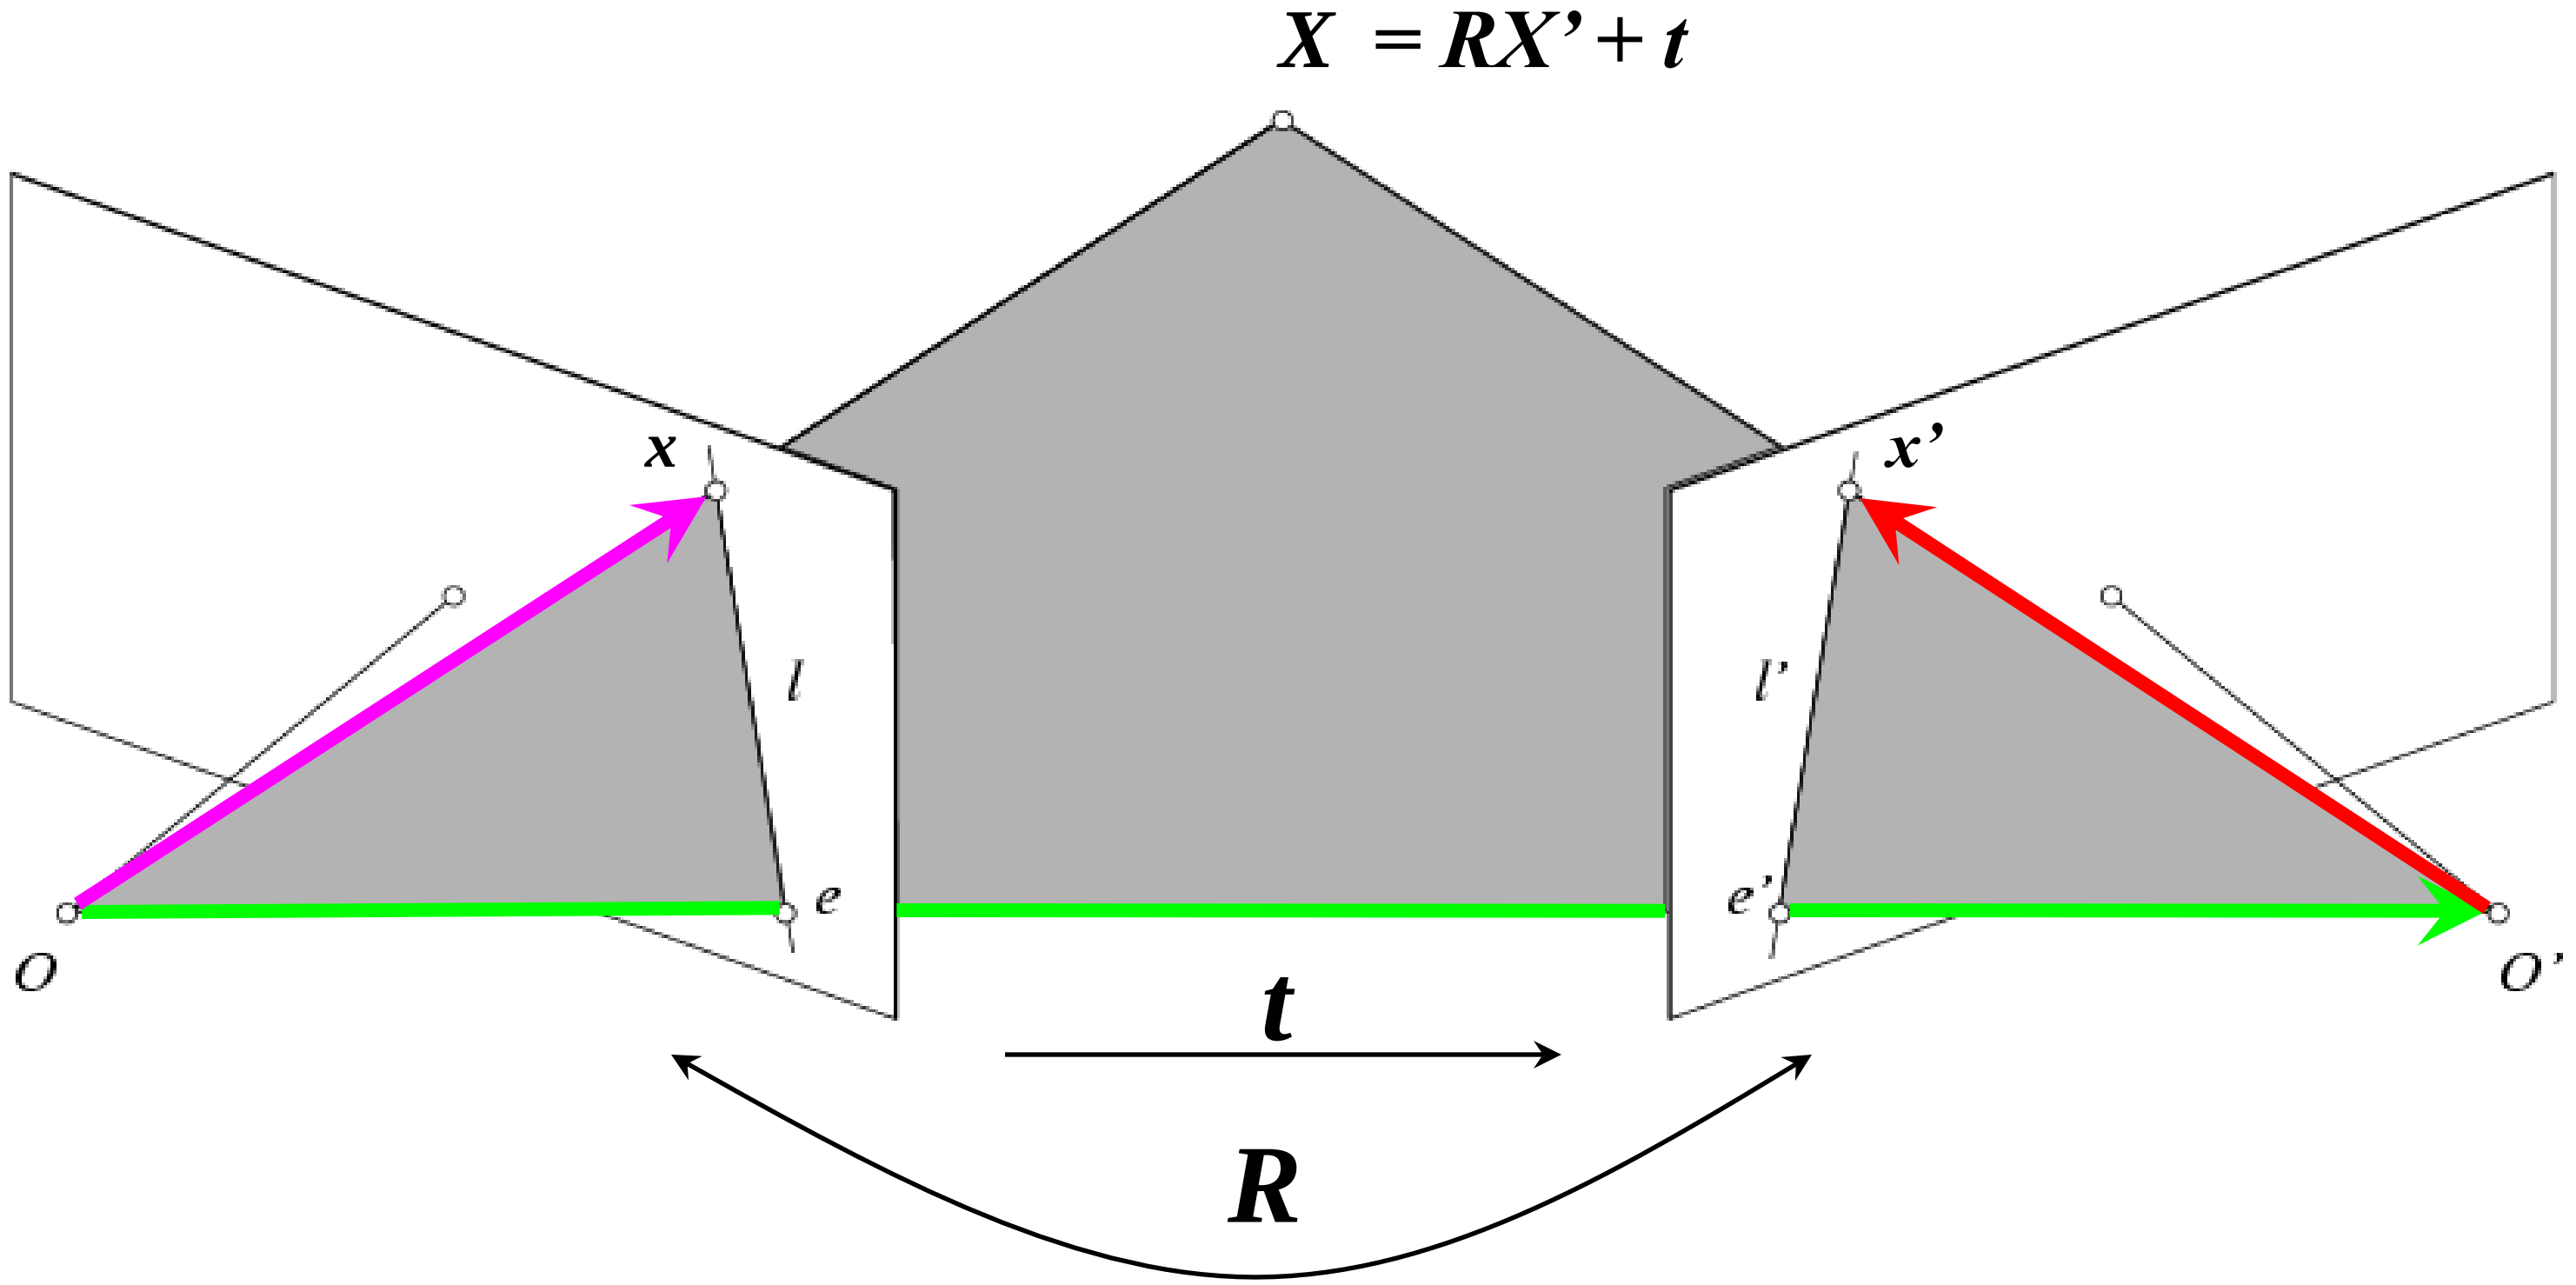

The vectors $\boldsymbol{x}$, $\boldsymbol{t}$, and $\boldsymbol{Rx'}$ are coplanar

Epipolar constraint: Calibrated case

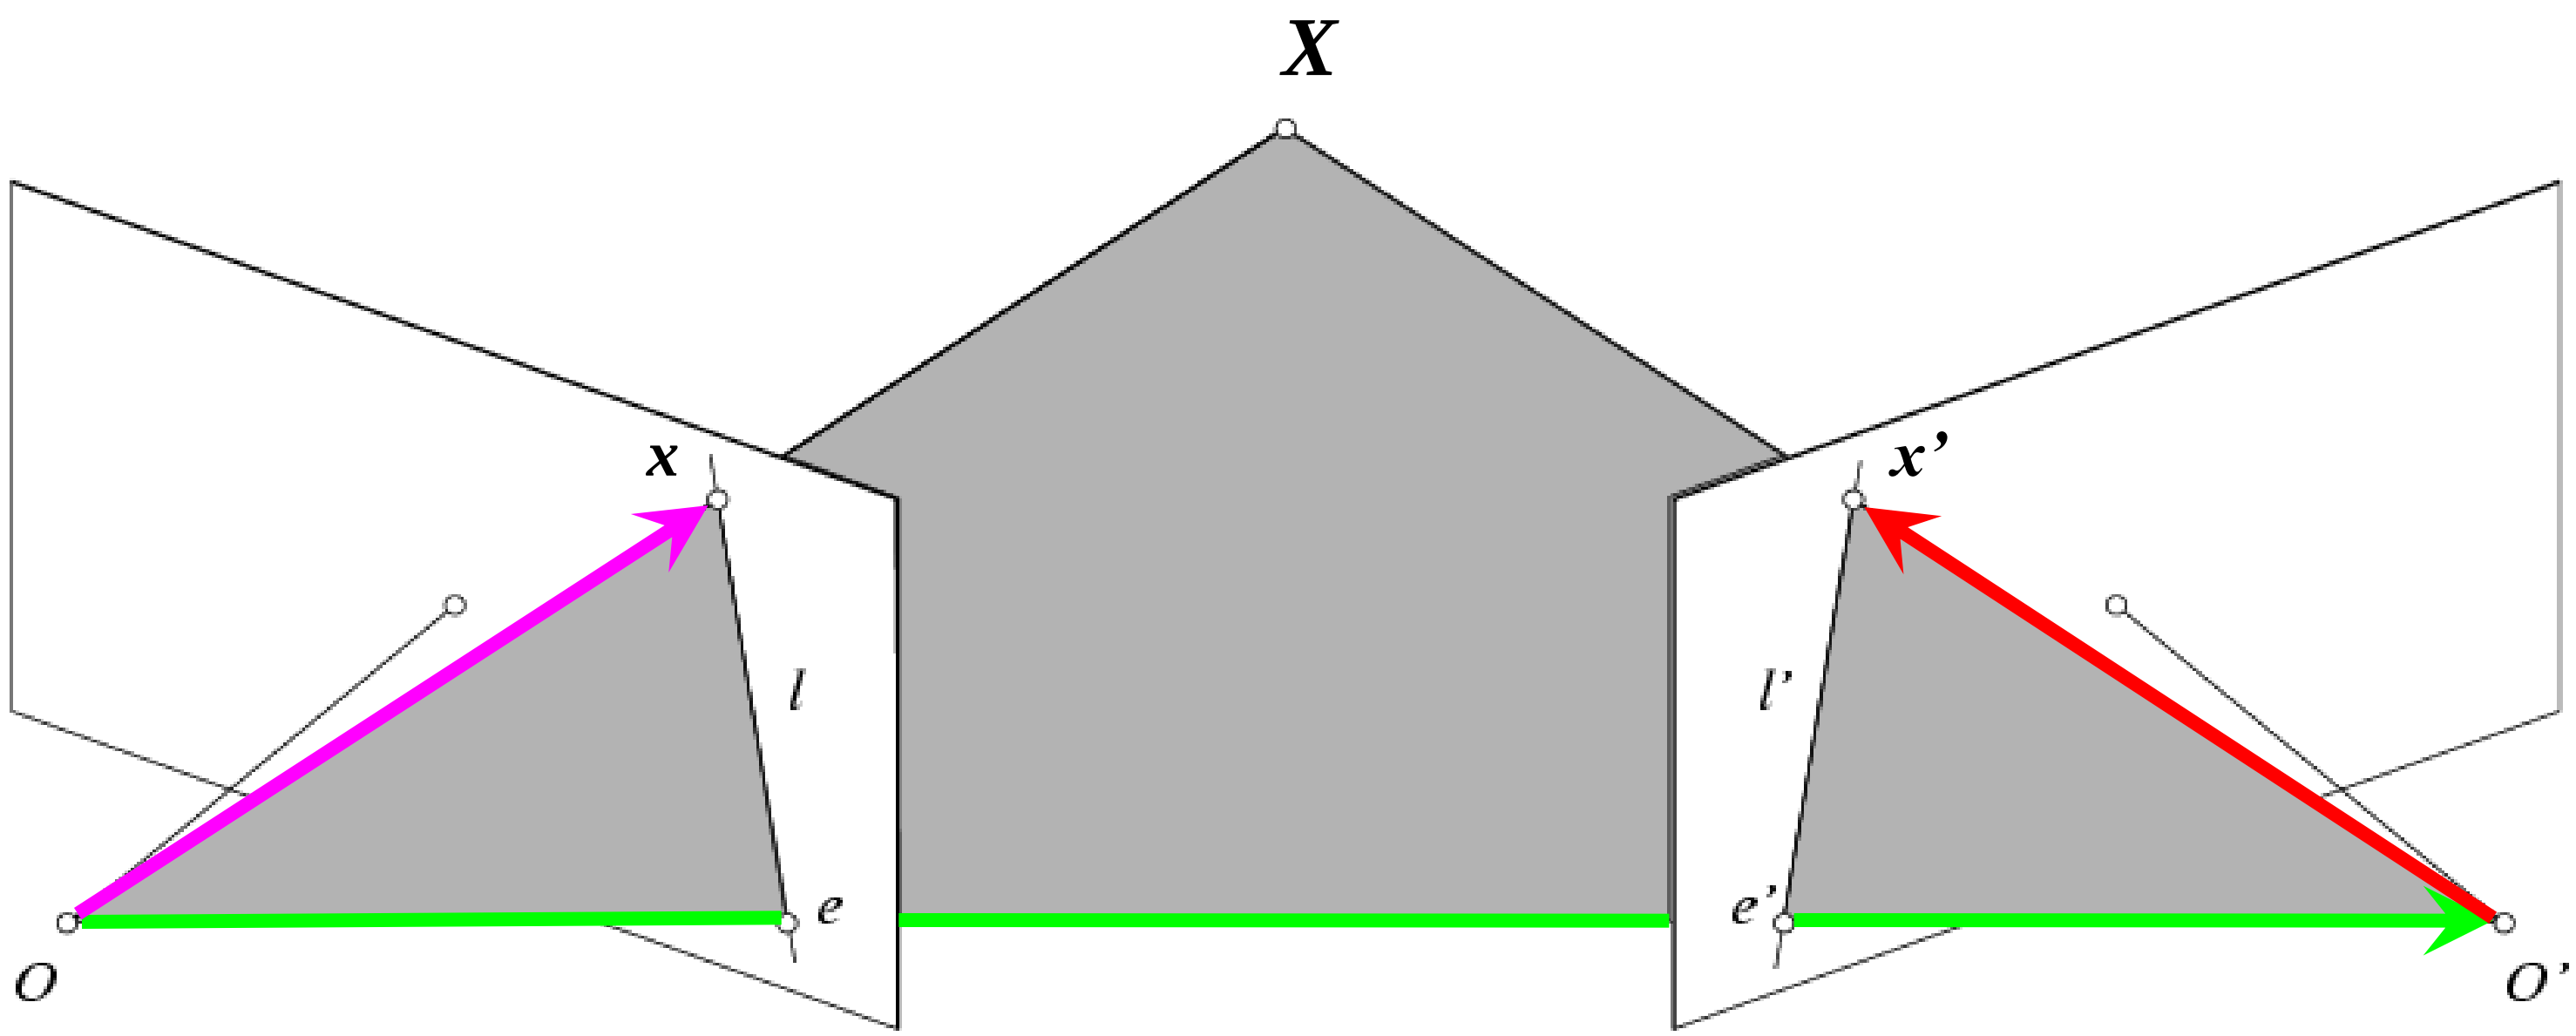

$$x \cdot [t \times (R x')] = 0 \quad \Rightarrow \quad x^T E x' = 0 \quad \text{with} \quad E = [t_\times] R$$

Essential Matrix
(Longuet-Higgins, 1981)

The vectors ***x***, ***t***, and ***Rx'*** are coplanar

Epipolar constraint: Calibrated case

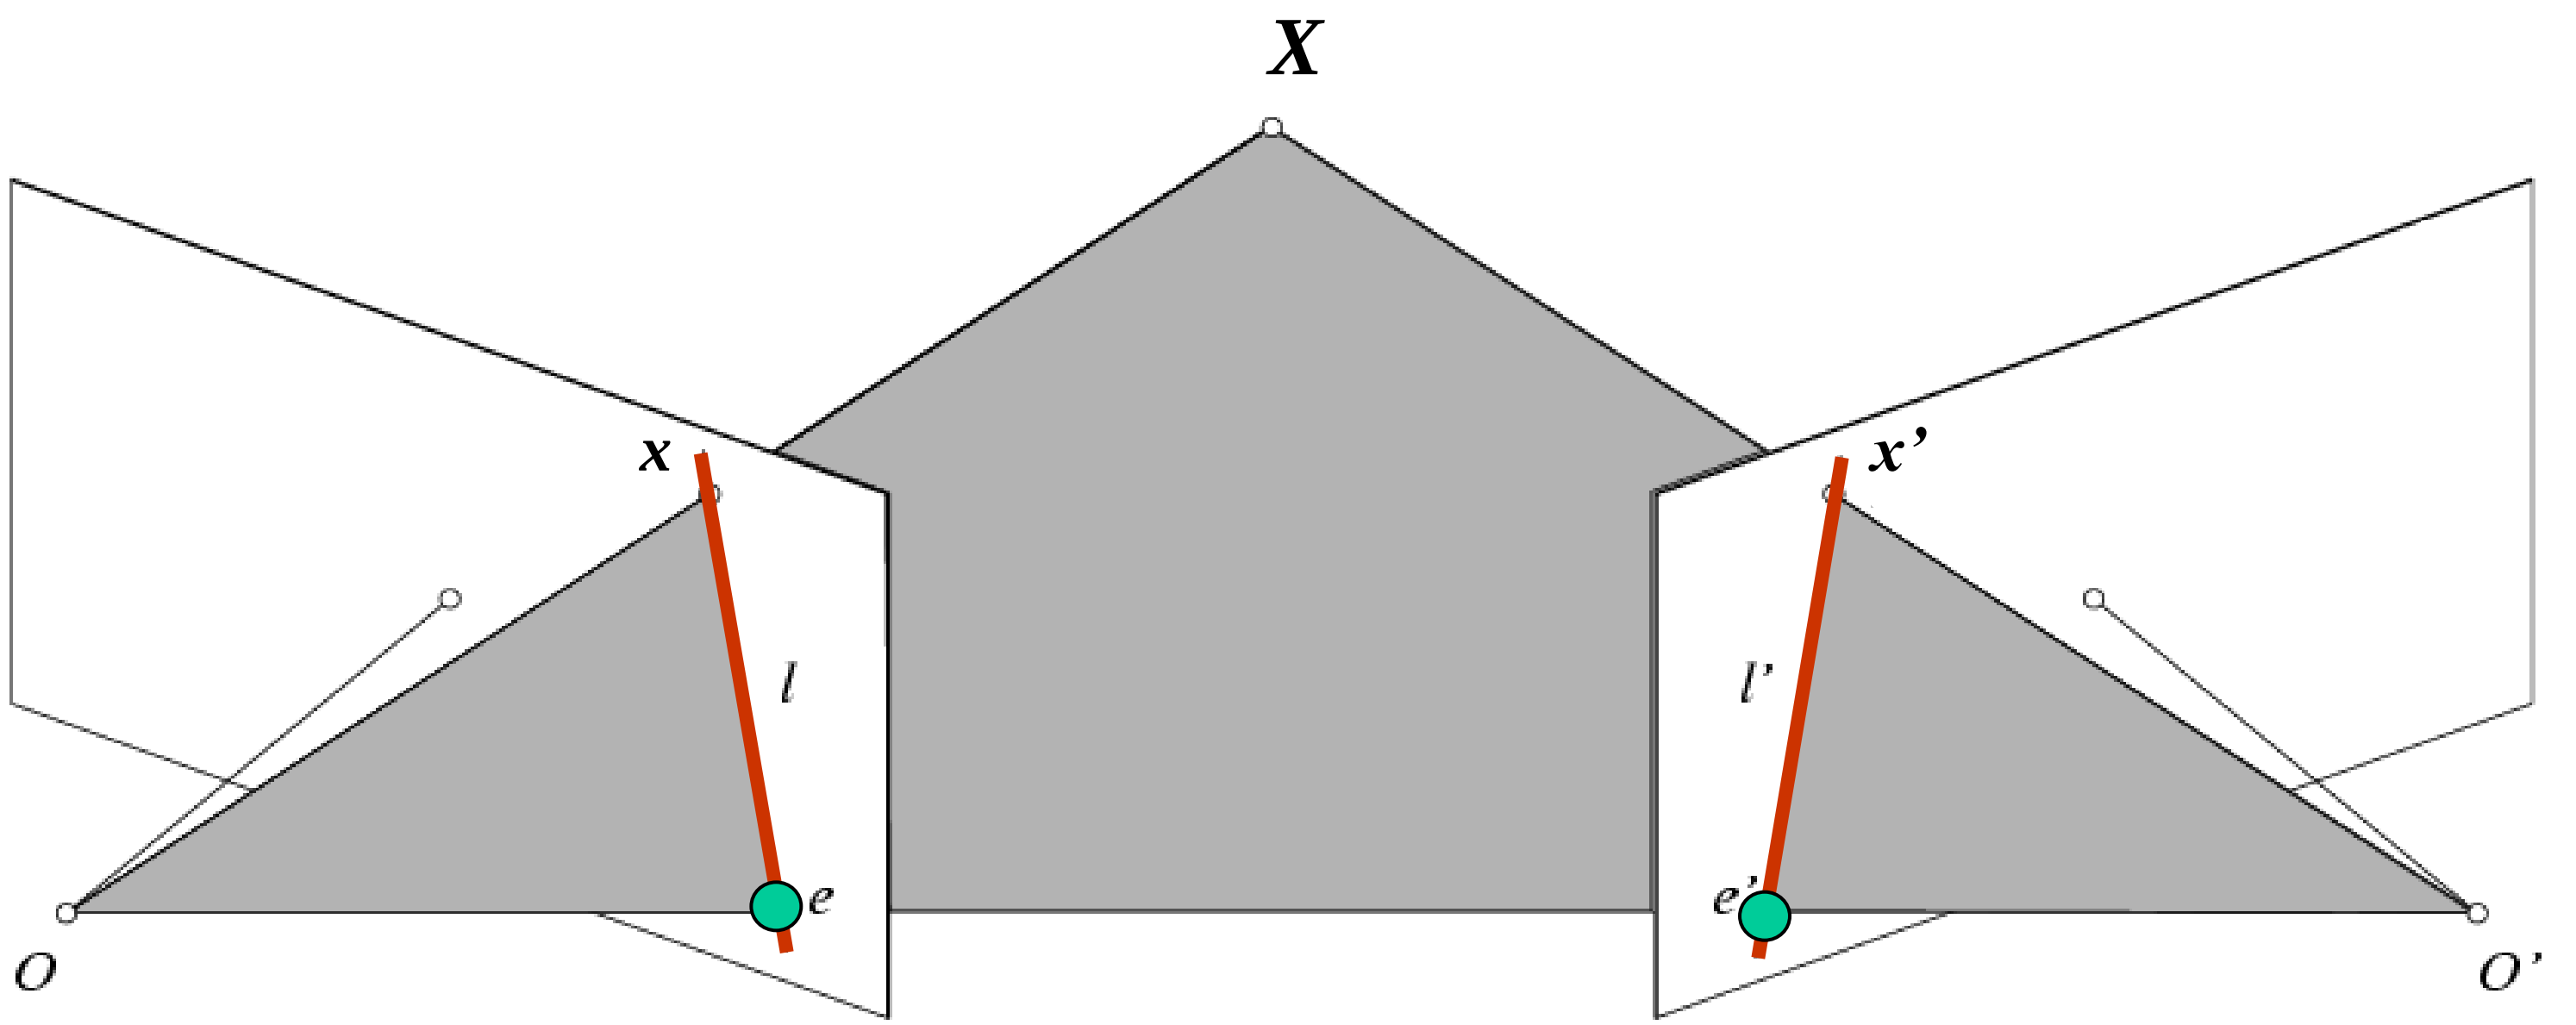

$$x \cdot [t \times (Rx')] = 0 \quad \Rightarrow \quad x^T E x' = 0 \quad \text{with} \quad E = [t_\times]R$$

- *E x'* is the epipolar line associated with *x'* (*l* = *E x'*)
- $E^T x$ is the epipolar line associated with *x* ($l' = E^T x$)
- *E e'* = 0 and $E^T e = 0$
- *E* is singular (rank two)
- *E* has five degrees of freedom

Epipolar constraint: Uncalibrated case

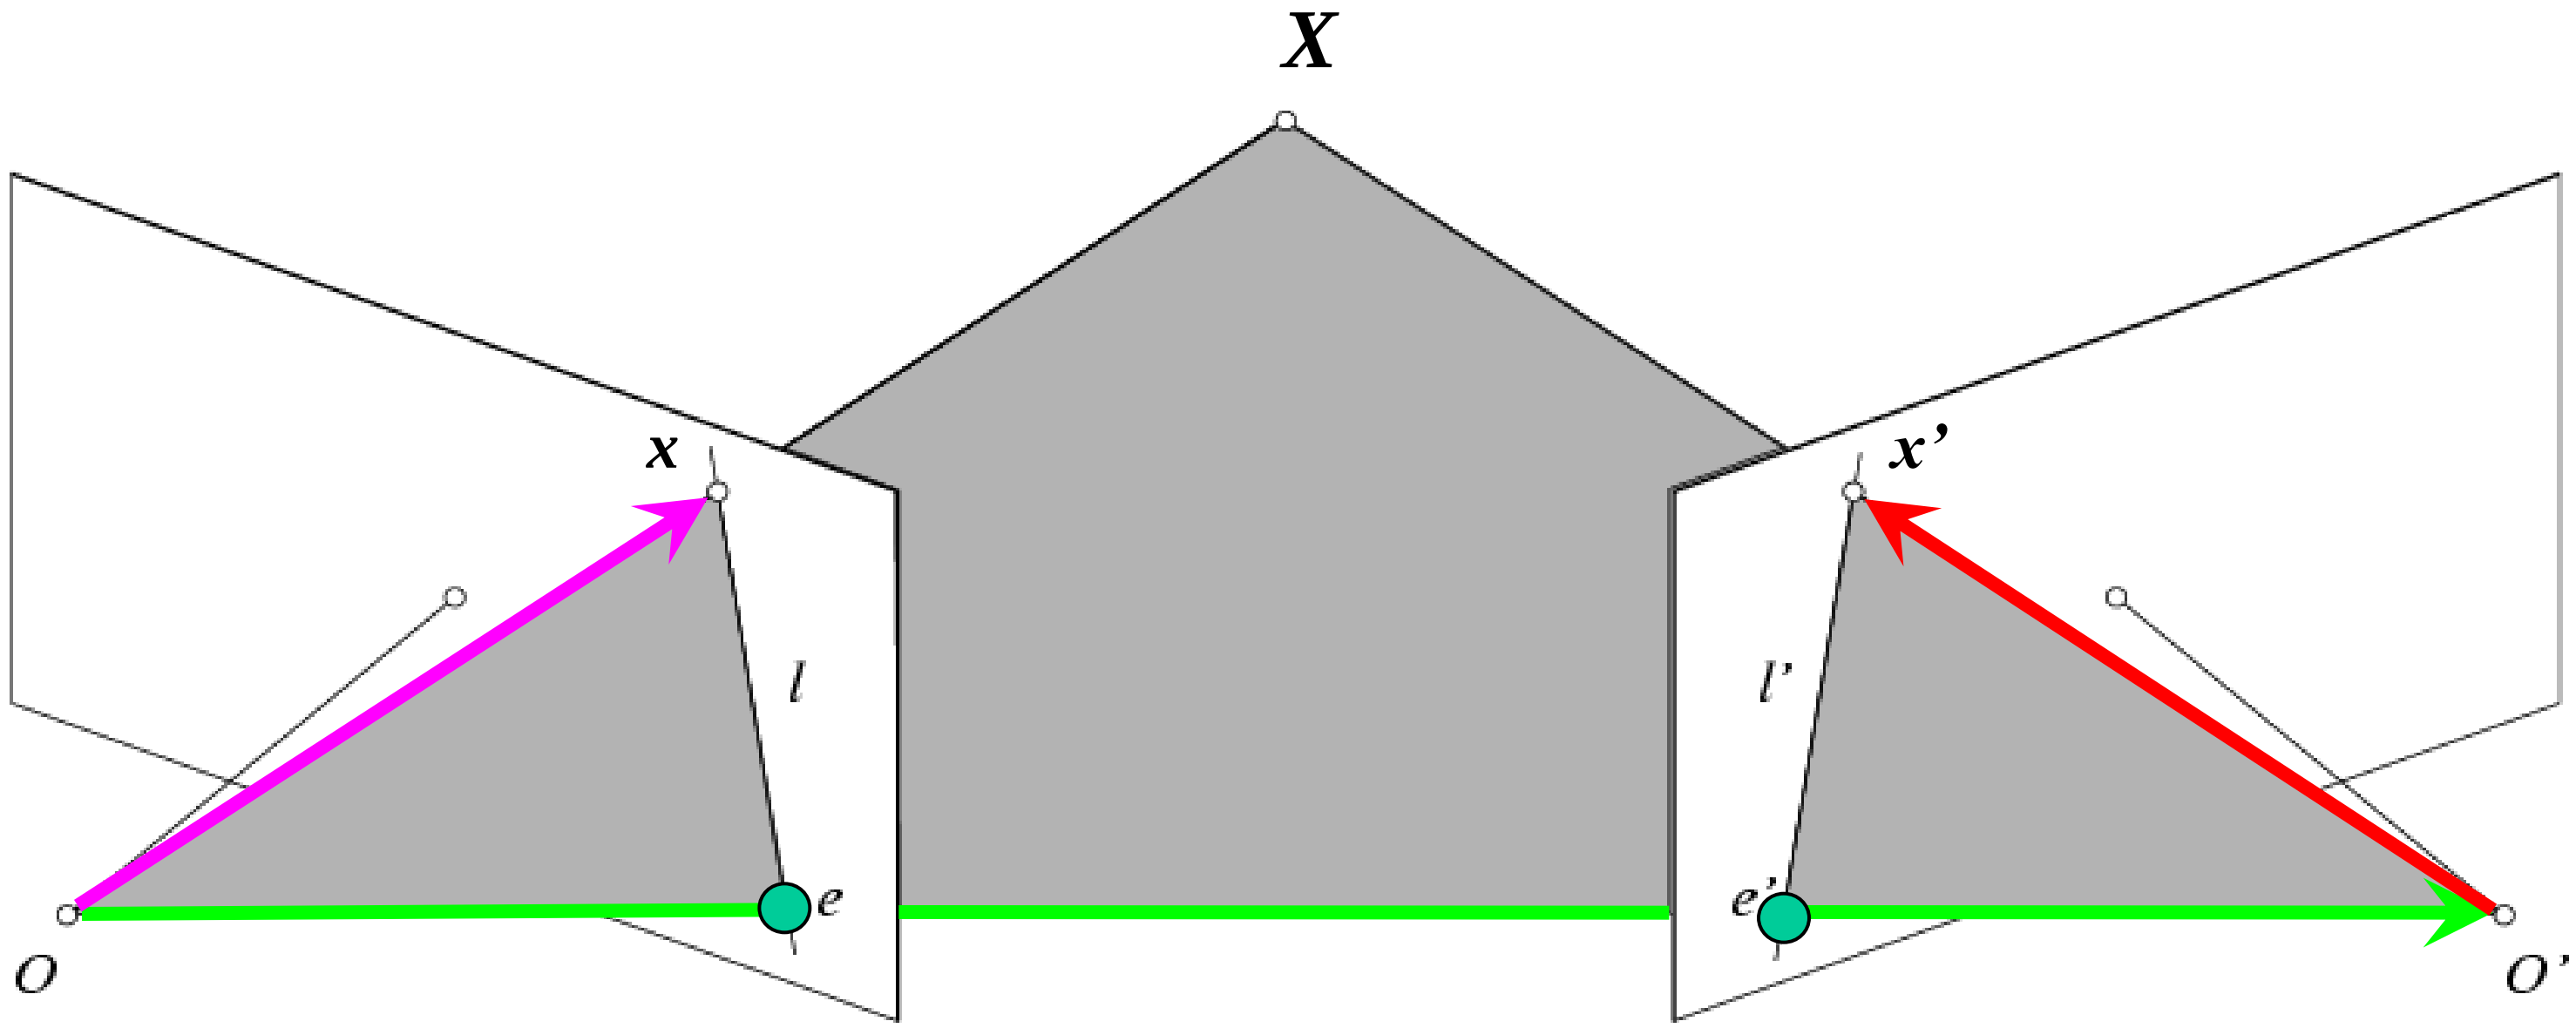

- The calibration matrices *K* and *K'* of the two cameras are unknown
- We can write the epipolar constraint in terms of *unknown* normalized coordinates:

$$\hat{x}^T E \hat{x}' = 0 \qquad\qquad x = K\hat{x}, \quad x' = K'\hat{x}'$$

Epipolar constraint: Uncalibrated case

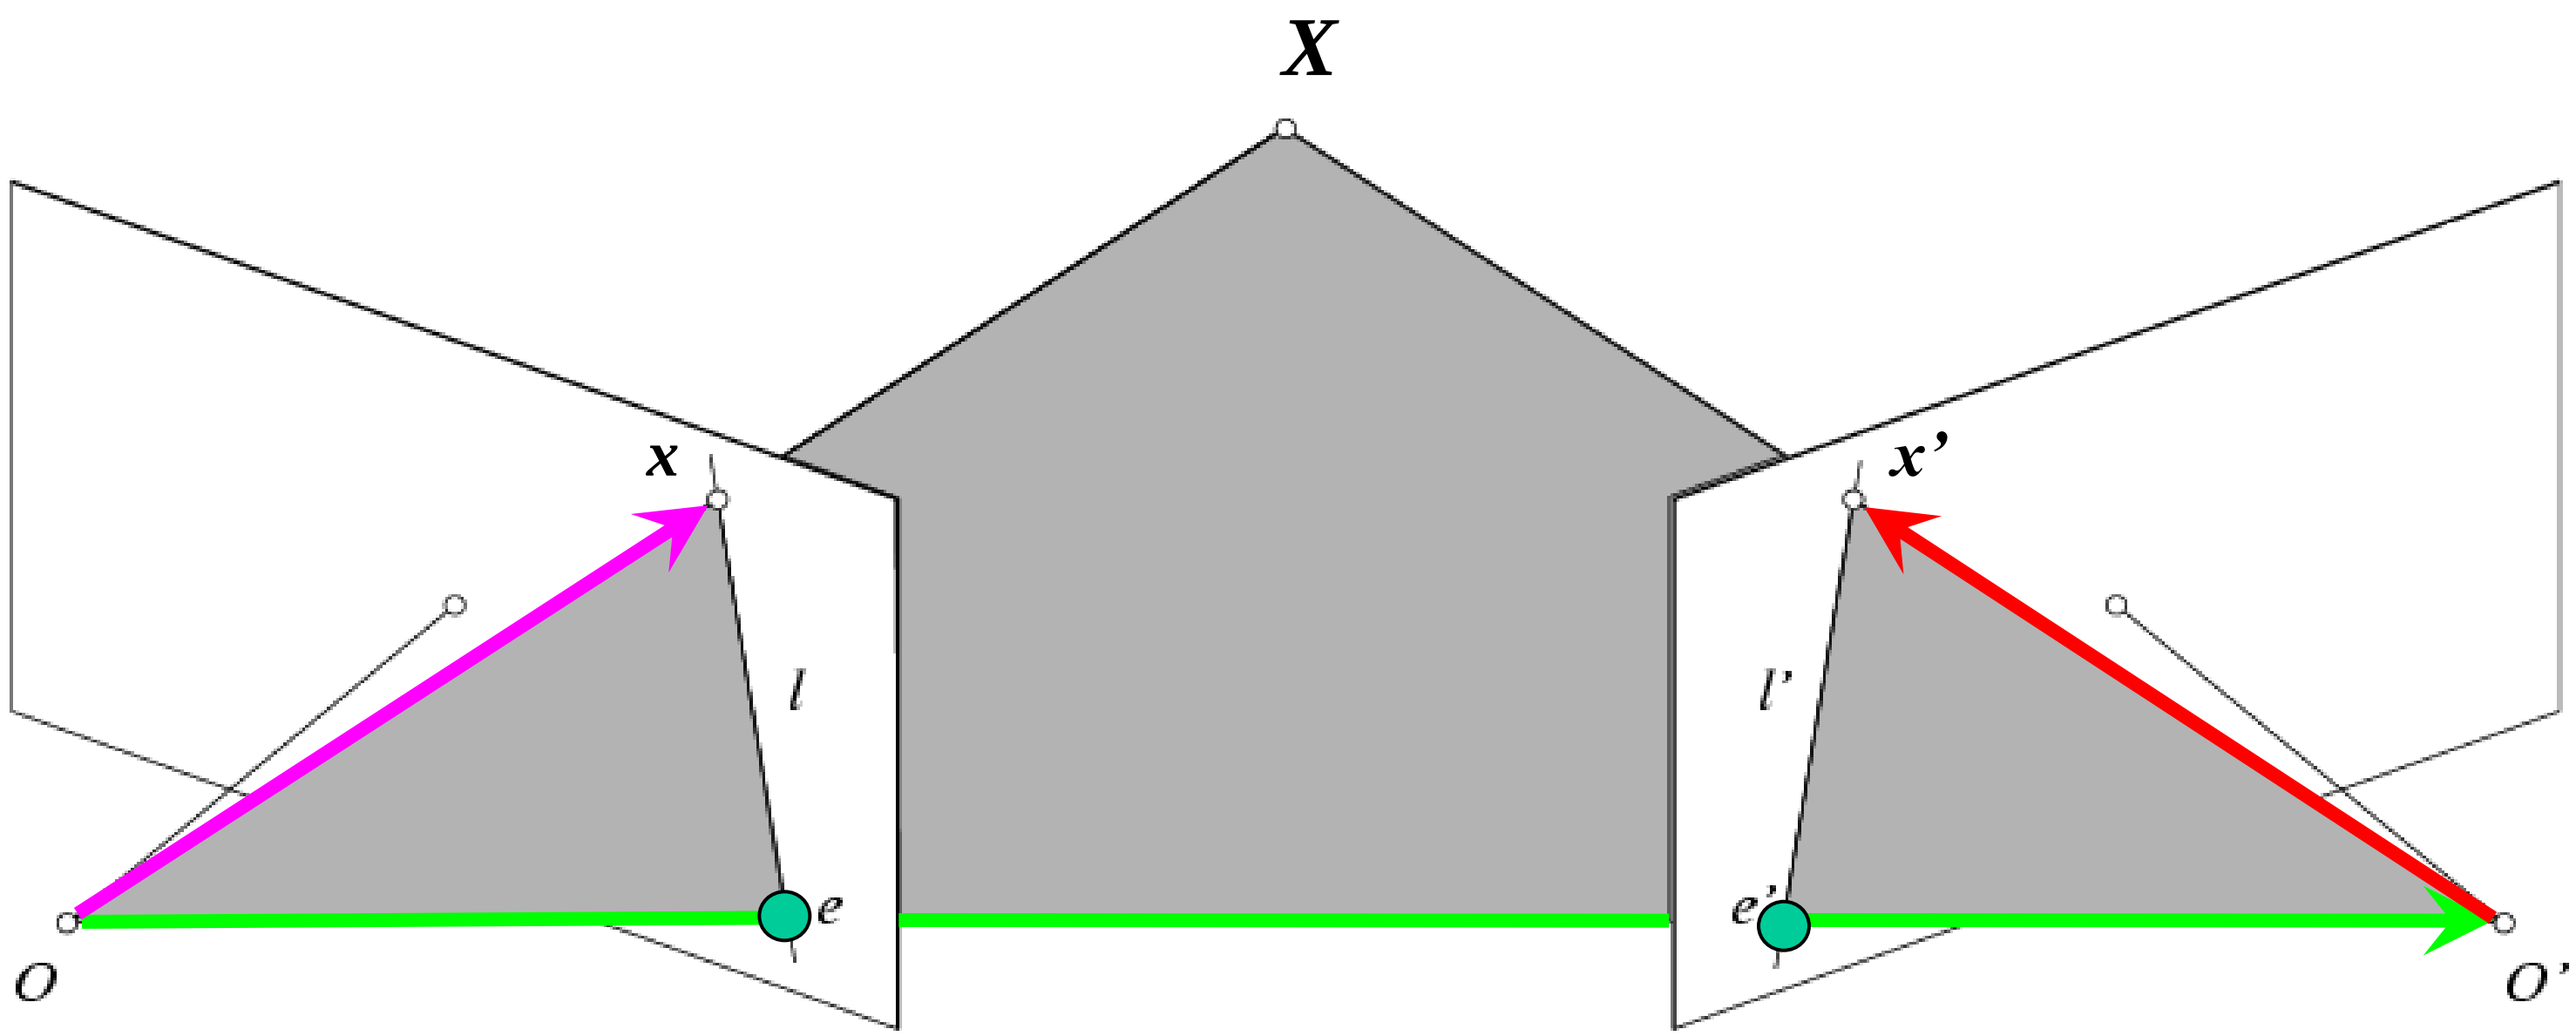

$$\hat{x}^T E \hat{x}' = 0 \quad \Rightarrow \quad x^T F x' = 0 \quad \text{with} \quad F = K^{-T} E K'^{-1}$$

$$\hat{x} = K^{-1} x$$

$$\hat{x}' = K'^{-1} x'$$

Fundamental Matrix

(Faugeras and Luong, 1992)

Epipolar constraint: Uncalibrated case

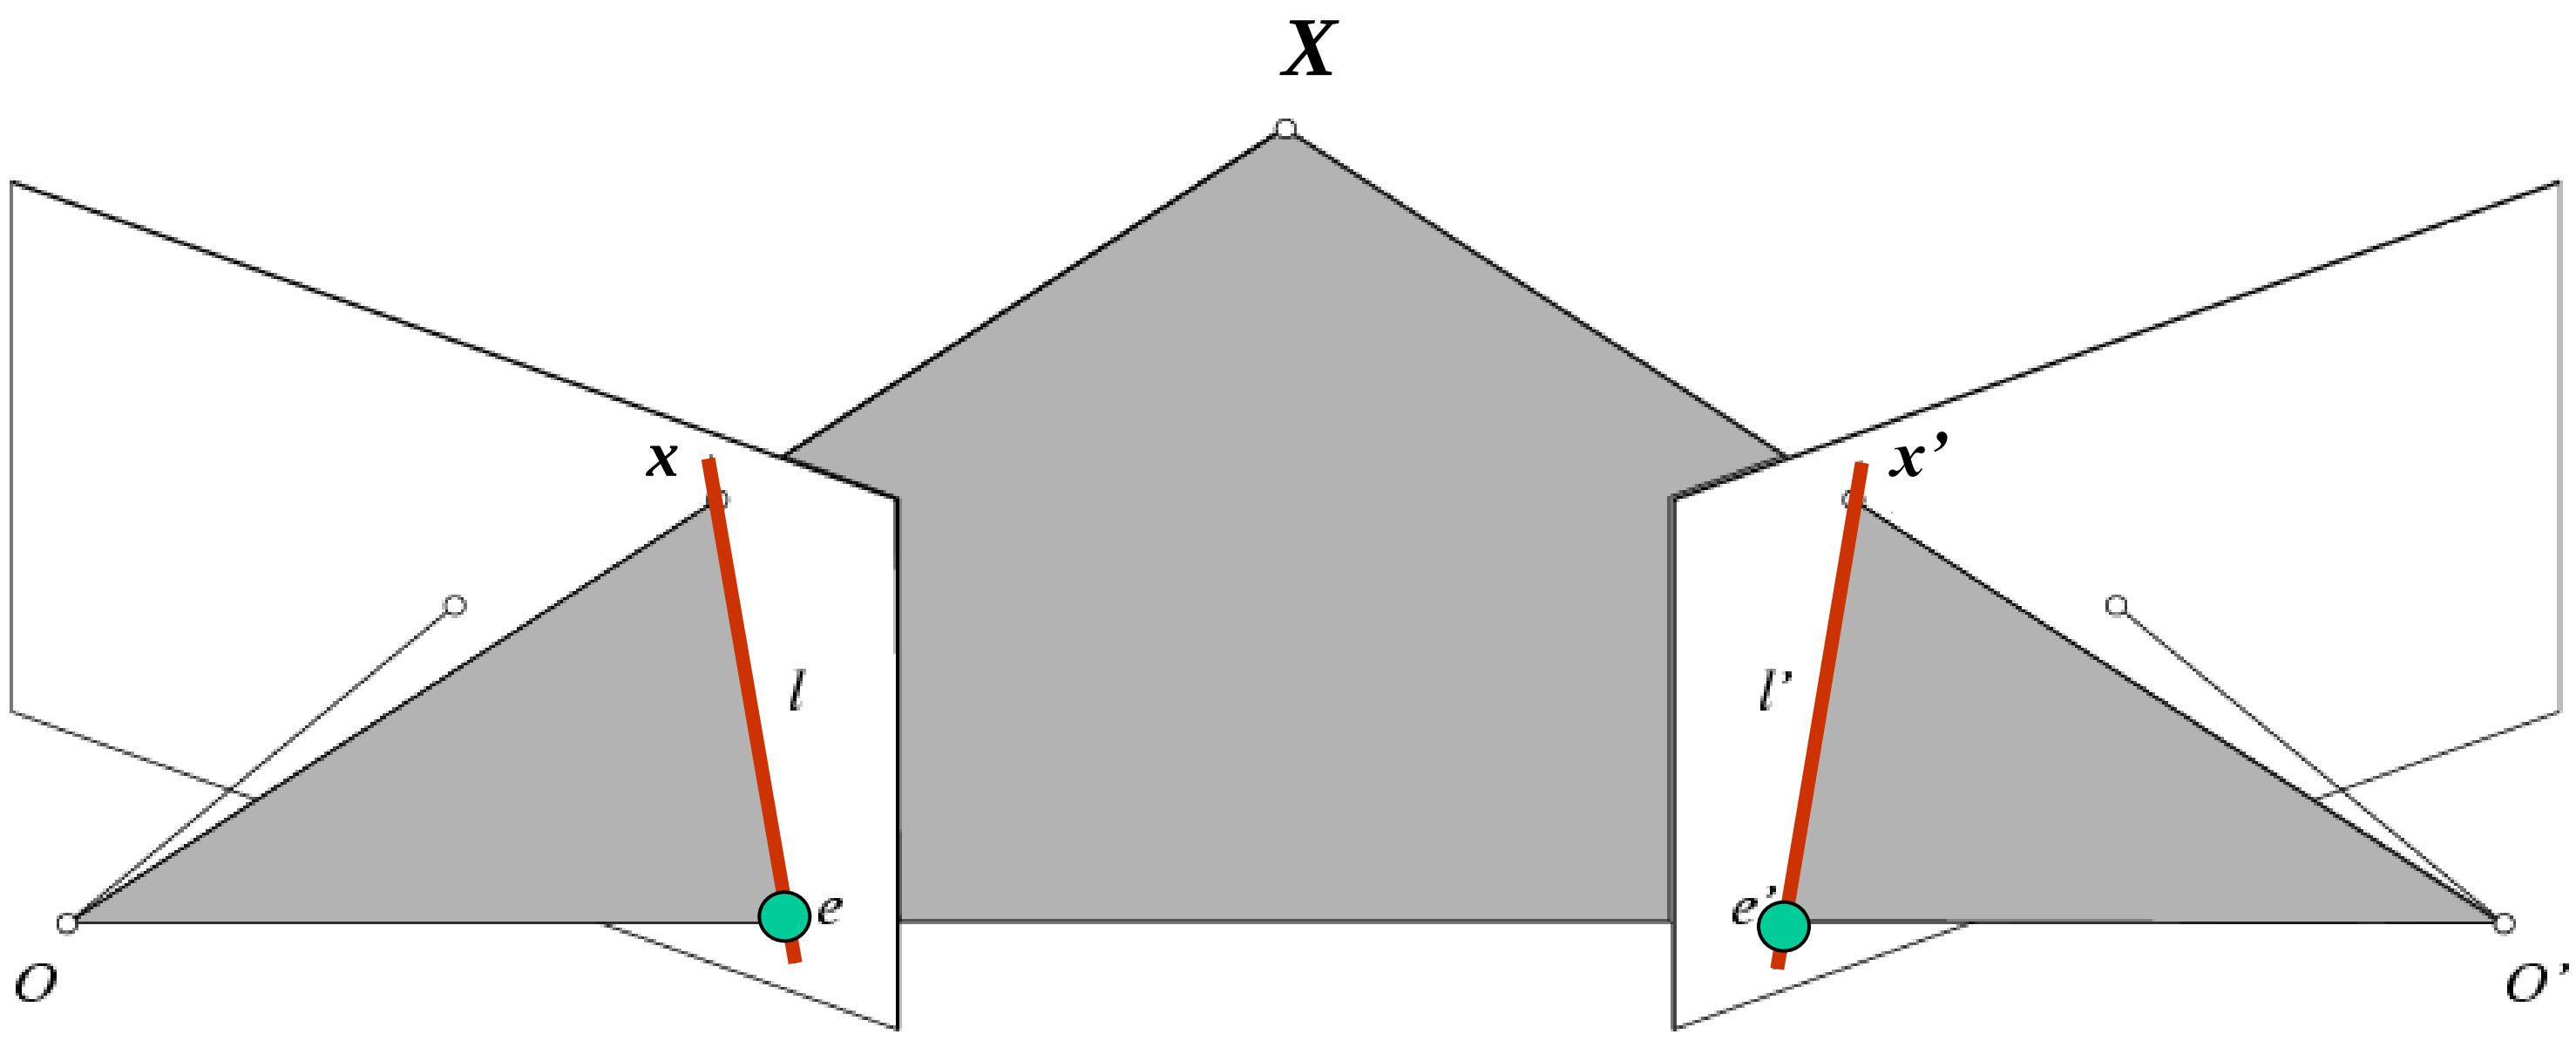

$$\hat{x}^T E \hat{x}' = 0 \quad \Rightarrow \quad x^T F x' = 0 \quad \text{with} \quad F = K^{-T} E K'^{-1}$$

- $F x'$ is the epipolar line associated with x' ($l = F x'$)
- $F^T x$ is the epipolar line associated with x ($l' = F^T x$)
- $F e' = 0$ and $F^T e = 0$
- F is singular (rank two)
- F has seven degrees of freedom

The eight-point algorithm

$\boldsymbol{x} = (u, v, 1)^T, \quad \boldsymbol{x'} = (u', v', 1)^T$

$$(u, v, 1)\begin{pmatrix} F_{11} & F_{12} & F_{13} \\ F_{21} & F_{22} & F_{23} \\ F_{31} & F_{32} & F_{33} \end{pmatrix}\begin{pmatrix} u' \\ v' \\ 1 \end{pmatrix} = 0 \quad \Rightarrow \quad (uu', uv', u, vu', vv', v, u', v', 1)\begin{pmatrix} F_{11} \\ F_{12} \\ F_{13} \\ F_{21} \\ F_{22} \\ F_{23} \\ F_{31} \\ F_{32} \\ F_{33} \end{pmatrix} = 0$$

$$\begin{pmatrix} u_1u_1' & u_1v_1' & u_1 & v_1u_1' & v_1v_1' & v_1 & u_1' & v_1' \\ u_2u_2' & u_2v_2' & u_2 & v_2u_2' & v_2v_2' & v_2 & u_2' & v_2' \\ u_3u_3' & u_3v_3' & u_3 & v_3u_3' & v_3v_3' & v_3 & u_3' & v_3' \\ u_4u_4' & u_4v_4' & u_4 & v_4u_4' & v_4v_4' & v_4 & u_4' & v_4' \\ u_5u_5' & u_5v_5' & u_5 & v_5u_5' & v_5v_5' & v_5 & u_5' & v_5' \\ u_6u_6' & u_6v_6' & u_6 & v_6u_6' & v_6v_6' & v_6 & u_6' & v_6' \\ u_7u_7' & u_7v_7' & u_7 & v_7u_7' & v_7v_7' & v_7 & u_7' & v_7' \\ u_8u_8' & u_8v_8' & u_8 & v_8u_8' & v_8v_8' & v_8 & u_8' & v_8' \end{pmatrix}\begin{pmatrix} F_{11} \\ F_{12} \\ F_{13} \\ F_{21} \\ F_{22} \\ F_{23} \\ F_{31} \\ F_{32} \end{pmatrix} = -\begin{pmatrix} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \end{pmatrix} \quad \Rightarrow$$

Minimize:

$$\sum_{i=1}^{N} (x_i^T F x_i')^2$$

under the constraint

$$F_{33} = 1$$

The eight-point algorithm

- Meaning of error $\sum_{i=1}^{N}(x_i^T F x_i')^2$:

  sum of Euclidean distances between points x_i and epipolar lines Fx'_i (or points x'_i and epipolar lines $F^T x_i$) multiplied by a scale factor
- Nonlinear approach: minimize

$$\sum_{i=1}^{N}\left[\mathrm{d}^2(x_i, F x_i') + \mathrm{d}^2(x_i', F^T x_i)\right]$$

Problem with eight-point algorithm

$$\begin{pmatrix} u_1u'_1 & u_1v'_1 & u_1 & v_1u'_1 & v_1v'_1 & v_1 & u'_1 & v'_1 \\ u_2u'_2 & u_2v'_2 & u_2 & v_2u'_2 & v_2v'_2 & v_2 & u'_2 & v'_2 \\ u_3u'_3 & u_3v'_3 & u_3 & v_3u'_3 & v_3v'_3 & v_3 & u'_3 & v'_3 \\ u_4u'_4 & u_4v'_4 & u_4 & v_4u'_4 & v_4v'_4 & v_4 & u'_4 & v'_4 \\ u_5u'_5 & u_5v'_5 & u_5 & v_5u'_5 & v_5v'_5 & v_5 & u'_5 & v'_5 \\ u_6u'_6 & u_6v'_6 & u_6 & v_6u'_6 & v_6v'_6 & v_6 & u'_6 & v'_6 \\ u_7u'_7 & u_7v'_7 & u_7 & v_7u'_7 & v_7v'_7 & v_7 & u'_7 & v'_7 \\ u_8u'_8 & u_8v'_8 & u_8 & v_8u'_8 & v_8v'_8 & v_8 & u'_8 & v'_8 \end{pmatrix} \begin{pmatrix} F_{11} \\ F_{12} \\ F_{13} \\ F_{21} \\ F_{22} \\ F_{23} \\ F_{31} \\ F_{32} \end{pmatrix} = - \begin{pmatrix} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \end{pmatrix}$$

Problem with eight-point algorithm

$$
\begin{bmatrix}
250906.36 & 183269.57 & 921.81 & 200931.10 & 146766.13 & 738.21 & 272.19 & 198.81 \\
2692.28 & 131633.03 & 176.27 & 6196.73 & 302975.59 & 405.71 & 15.27 & 746.79 \\
416374.23 & 871684.30 & 935.47 & 408110.89 & 854384.92 & 916.90 & 445.10 & 931.81 \\
191183.60 & 171759.40 & 410.27 & 416435.62 & 374125.90 & 893.65 & 465.99 & 418.65 \\
48988.86 & 30401.76 & 57.89 & 298604.57 & 185309.58 & 352.87 & 846.22 & 525.15 \\
164786.04 & 546559.67 & 813.17 & 1998.37 & 6628.15 & 9.86 & 202.65 & 672.14 \\
116407.01 & 2727.75 & 138.89 & 169941.27 & 3982.21 & 202.77 & 838.12 & 19.64 \\
135384.58 & 75411.13 & 198.72 & 411350.03 & 229127.78 & 603.79 & 681.28 & 379.48
\end{bmatrix}
\begin{pmatrix} F_{11} \\ F_{12} \\ F_{13} \\ F_{21} \\ F_{22} \\ F_{23} \\ F_{31} \\ F_{32} \end{pmatrix}
= -
\begin{pmatrix} 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \\ 1 \end{pmatrix}
$$

Poor numerical conditioning

Can be fixed by rescaling the data

The normalized eight-point algorithm

(Hartley, 1995)

- Center the image data at the origin, and scale it so the mean squared distance between the origin and the data points is 2 pixels
- Use the eight-point algorithm to compute *F* from the normalized points
- Enforce the rank-2 constraint (for example, take SVD of *F* and throw out the smallest singular value)
- Transform fundamental matrix back to original units: if T and T' are the normalizing transformations in the two images, than the fundamental matrix in original coordinates is $T^T F T'$

Comparison of estimation algorithms

	8-point	Normalized 8-point	Nonlinear least squares
Av. Dist. 1	2.33 pixels	0.92 pixel	0.86 pixel
Av. Dist. 2	2.18 pixels	0.85 pixel	0.80 pixel

From epipolar geometry to camera calibration

- Estimating the fundamental matrix is known as "weak calibration"
- If we know the calibration matrices of the two cameras, we can estimate the essential matrix: $E = K^T F K'$
- The essential matrix gives us the relative rotation and translation between the cameras, or their extrinsic parameters