




SMA wire Sub-Assembly

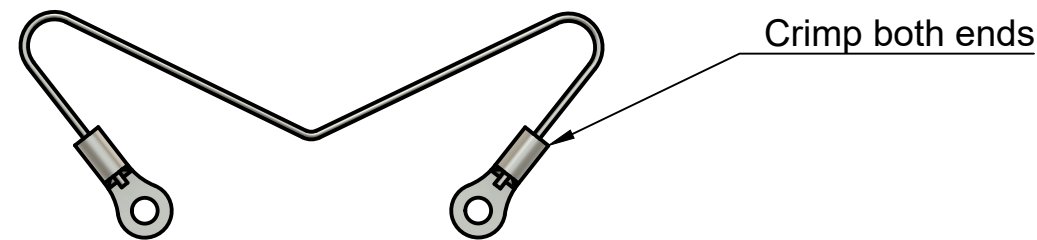

Step-1

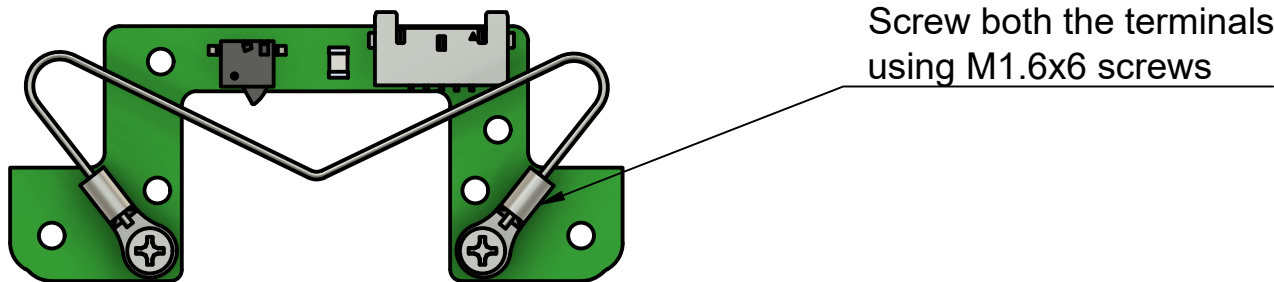


Step-2

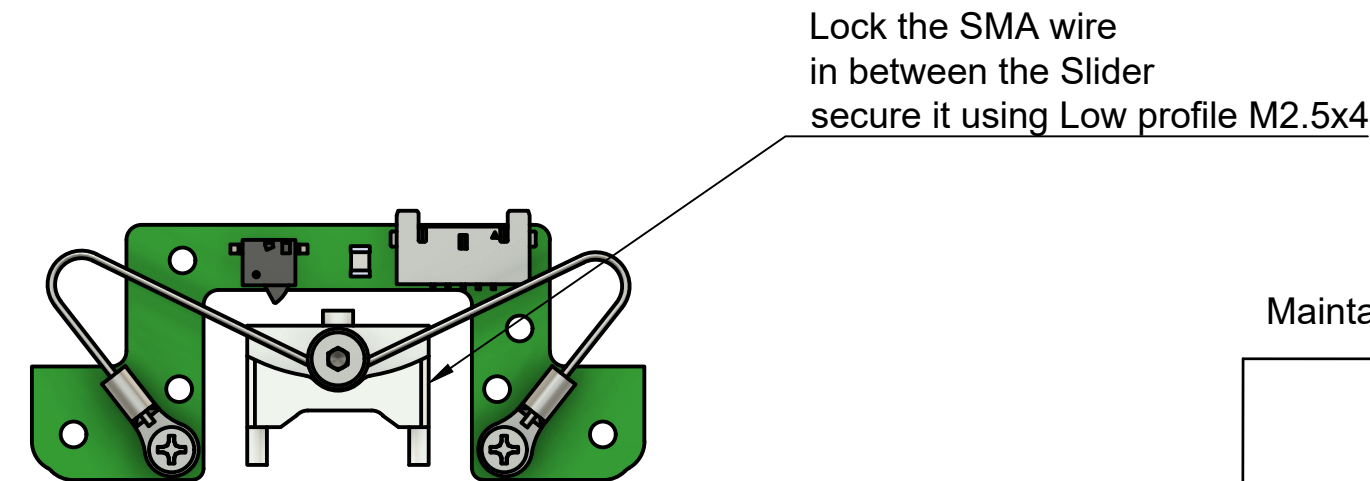

Step-3

Maintain distance between the crimps at 64mm to achieve tension.



Unless otherwise specified: All dimensions are in mm Deviation for non-toleranced dimensions: IS-2102 - MEDIUM GRADE 0.5 < - < 5 ±0.1 5 < - < 30 ±0.2 30 < - < 120 ±0.3 120 < - < 400 ±0.5 400 < - < 1000 ±0.8 1000 < - < 2000 ±1.2 2000 < - < 4000 ±2.0		Project: TM2S HDRM Part name: HDRM Assembly Drawing Material: ---- Mass: Quantity: Drawing scale: 2:1	
		Created by: Rahul Approved by: Sharat Kamidi Date created: 21-07-2025 Date of issue:	
		Revision: A	Sheet: 2/3

