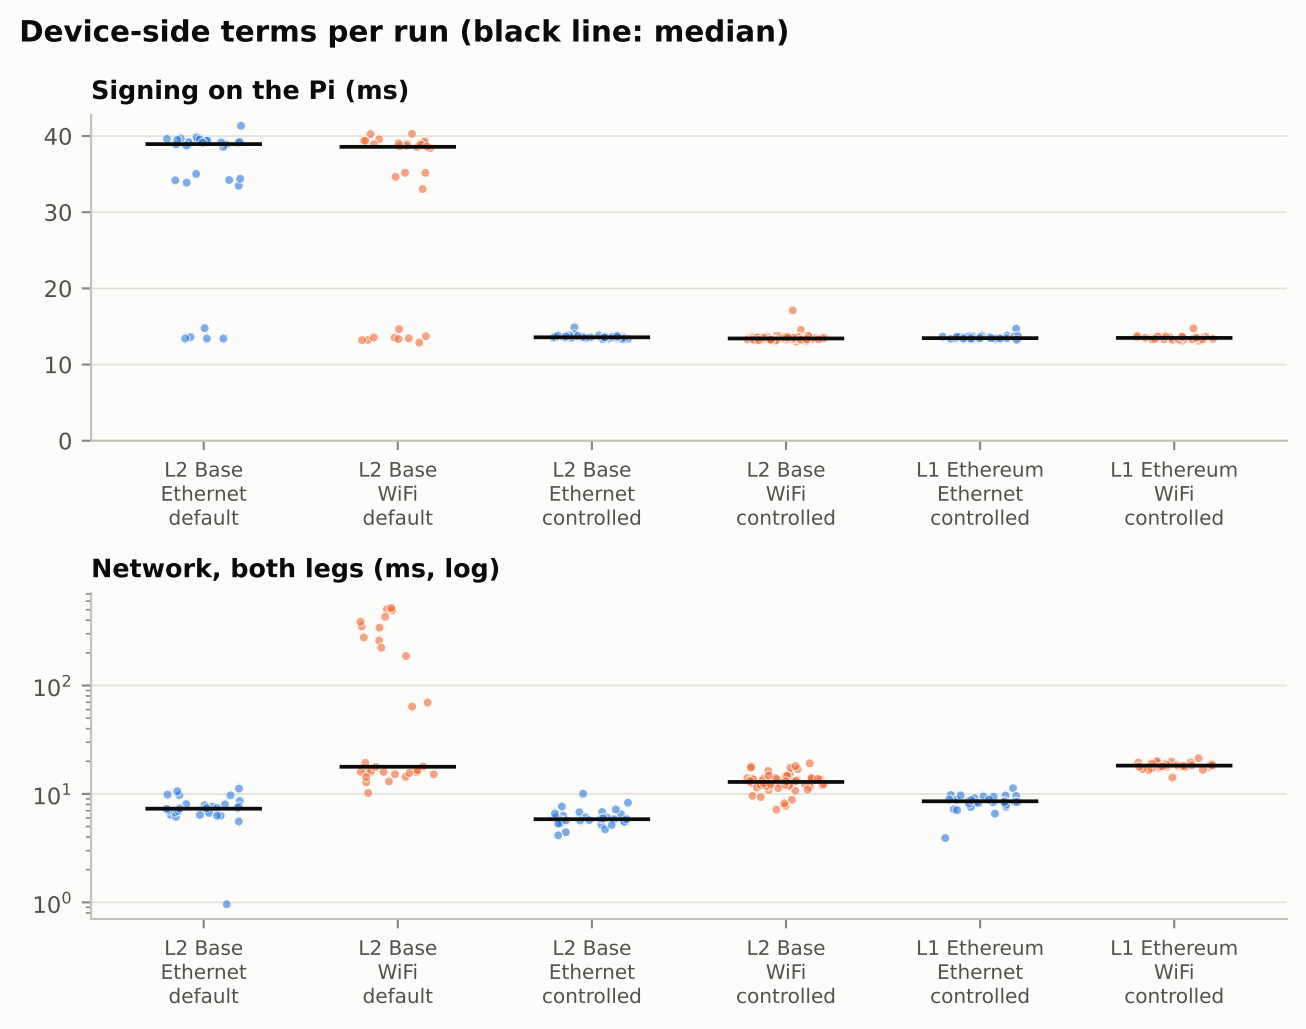
Device-side terms per run (black line: median)
Signing on the Pi (ms)
40
30
20
10
0
L2 Base Ethernet default
L2 Base WiFi default
L2 Base Ethernet controlled
L2 Base WiFi controlled
L1 Ethereum Ethernet controlled
L1 Ethereum WiFi controlled
Network, both legs (ms, log)
10^2
10^1
10^0
L2 Base Ethernet default
L2 Base WiFi default
L2 Base Ethernet controlled
L2 Base WiFi controlled
L1 Ethereum Ethernet controlled
L1 Ethereum WiFi controlled