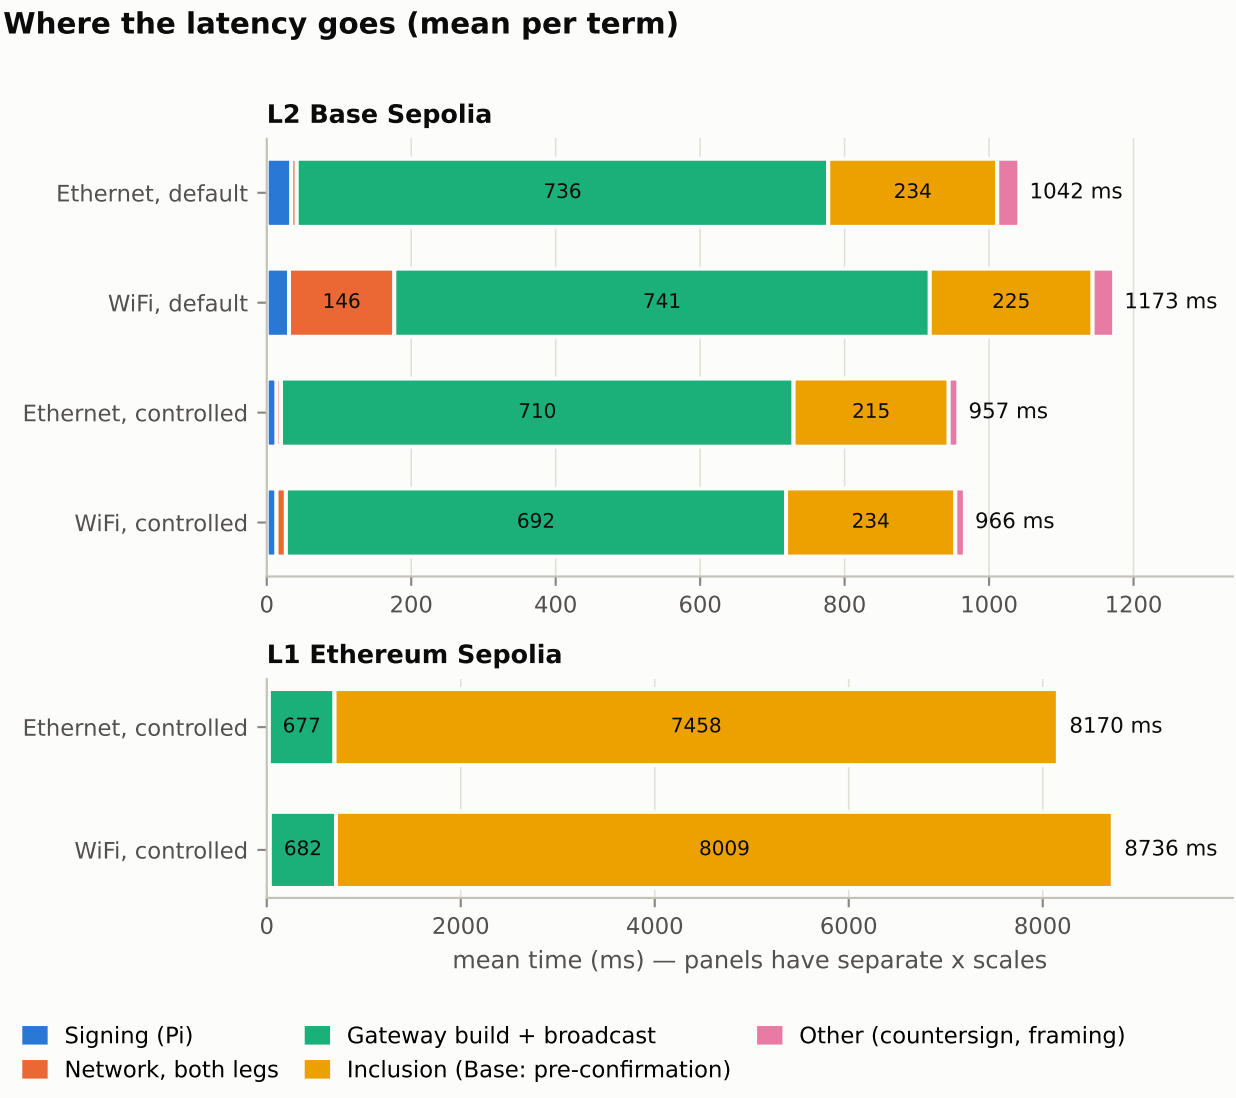
Where the latency goes (mean per term)
L2 Base Sepolia
Ethernet, default
736
234
1042 ms
WiFi, default
146
741
225
1173 ms
Ethernet, controlled
710
215
957 ms
WiFi, controlled
692
234
966 ms
0
200
400
600
800
1000
1200
L1 Ethereum Sepolia
Ethernet, controlled
677
7458
8170 ms
WiFi, controlled
682
8009
8736 ms
0
2000
4000
6000
8000
mean time (ms) — panels have separate x scales
Signing (Pi)
Network, both legs
Gateway build + broadcast
Inclusion (Base: pre-confirmation)
Other (countersign, framing)