

## Location Identification

### Introduction

The following kinds of parameters in the MTNM specification need exact identification of the signal direction or signal location to which they apply to:

- Performance Parameters
- Probable Causes
- Layered Parameters


### Performance Parameters

The location identification for the performance parameters is modelled with the additional attribute "pmLocation" which is attached to every parameter.

The attribute pmLocation is used to identify three different items:

- the physical direction of the monitored signal (i.e. which bitstream is supervised), identified by "Contra"/""
- the logical direction of the monitored signal (i.e. to which direction the information of the supervised bits of the physical bitstream refer to), identified by "Near\_End"/"Far\_End"
- the type (i.e. sink or source) of atomic function that measures the signal, identified by "Rx"/"Tx".

Refer to **Figure 1** for clarification.

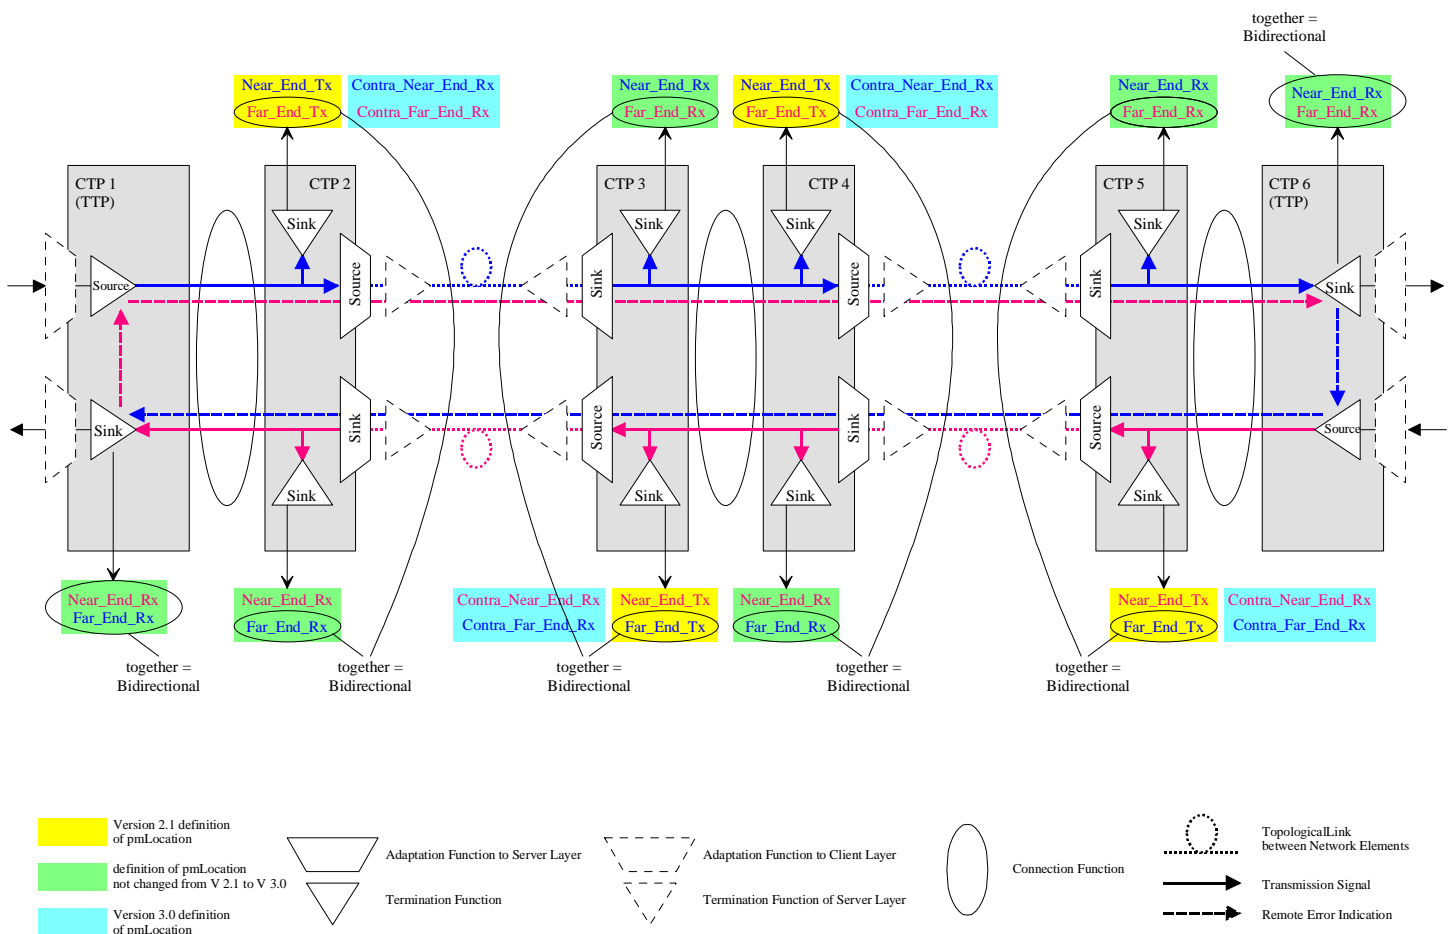

**Figure 1: Measurement points identified by pmLocation**

The attribute pmLocation can contain seven values to define the location of the measurement:

- **Bidirectional**  
Identifies a bidirectional measurement (i.e. both directions of the signal are taken into account for this measure)
- **Near\_End\_Rx**  
Identifies a unidirectional measurement provided by a sink monitoring function that supervises the signal which is related to the sink atomic function of this TP. The direction of the supervised signal is measured.
- **Far\_End\_Rx**  
Identifies a unidirectional measurement provided by a sink monitoring function that supervises the signal which is related to the sink atomic function of this TP. The opposite direction of the supervised signal is measured.
- **Contra\_Near\_End\_Rx**  
Identifies a unidirectional measurement provided by a sink monitoring function that supervises the signal which is related to the source atomic function of this TP. The direction of the supervised signal is measured.
- **Contra\_Far\_End\_Rx**  
Identifies a unidirectional measurement provided by a sink monitoring function that supervises the signal which is related to the source atomic function of this TP. The opposite direction of the supervised signal is measured.
- **Near\_End\_Tx**  
Identifies a unidirectional measurement provided by a source monitoring function of this TP. The direction of the supervised signal is measured.
- **Far\_End\_Tx**  
Identifies a unidirectional measurement provided by a source monitoring function of this TP. The opposite direction of the supervised signal is measured.

## Probable Causes

Termination Points can detect alarms on both directions of the signal. The definition of the direction is done with respect to the type of the atomic function that processes that direction of the signal. The identification of the direction is modelled in the **Name** of the probable cause.

All probable causes defined (see ProbableCauses supporting document) identify alarms detected on the signal which is related to the sink atomic function. For alarms detected on the signal which is related to the source atomic function, the prefix "Contra\_" has to be used (e.g. SSF → **Contra\_SSF** or TCM\_AIS → **Contra\_TCM\_AIS**).

Refer to **Figure 2** depicting a 2 Mbit/s port as an example.

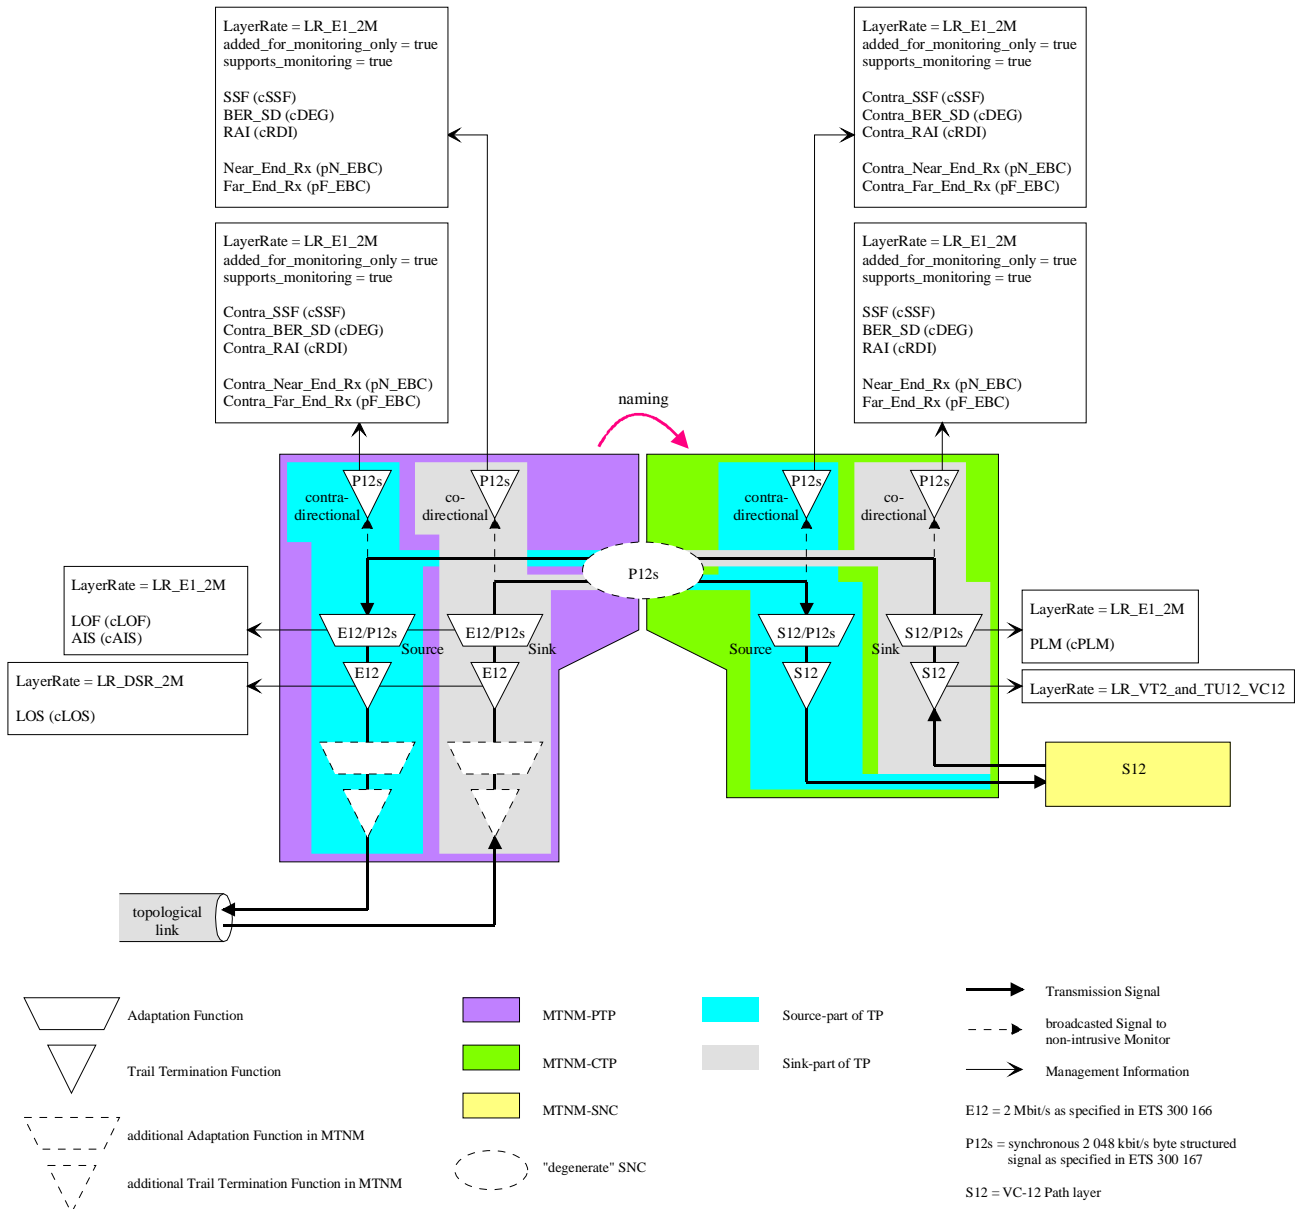


Figure 2: Parameters associated to a 2 Mbit/s Port

In addition it is also possible, that **one** Termination Point is physically located in **two** distinct located network elements (refer to DSL modelling as an example). This TP may detect the same probable cause in the local and in the remote network element.

In order to differentiate these two probable causes, an additional prefix "RU\_" (RU for Remote Unit) has to be used in the **Name** of the probable cause.

e.g. SSF → **RU\_SSF** or Contra\_TCM\_AIS → **RU\_Contra\_TCM\_AIS**

## Layered Parameters

In some cases **one** layered parameter is defined for **each** direction of the signal.

In order to differentiate these two parameters, the direction of the signal will be defined by the terms Codirectional and Contradirectional. For the Codirectional case no additional identification is necessary. For the Contradirectional case an additional inter-syllable "Contra" has to be used in the **Name** of the parameter (refer to TCM related parameters as an example).

e.g. TCMTrailTraceActualRx → TCM**Contra**TrailTraceActualRx

Definition of both terms:

- **Codirectional** transmission functions mean those which work in the same direction as the direction of the port, i.e.
  - sink functions related to information which is mapped from the signal received by the containing PTP
  - source functions related to the information which is mapped to the signal transmitted by the containing PTP.
- **Contradirectional** transmission functions mean those which work in the opposite direction as the direction of the port, i.e.
  - sink functions related to information which is mapped to the signal transmitted by the containing PTP
  - source functions related to the information which is mapped from the signal received by the containing PTP.

Refer to Figure 3 (below) for an example of a TCM function.

## Sx-Trail



## Revision History

Version	Date	Description of Change
3.0	April 2005	

## Acknowledgements

<FirstName>	<LastName>	<Company>

## How to comment on the document

Comments and requests for information must be in written form and addressed to the contact identified below:

Keith	Dorking	CIENA
Phone:	+1 678 867 5007	
Fax:	+1 678 867 5010	
e-mail:	Kdorking@ciena.com	

Please be specific, since your comments will be dealt with by the team evaluating numerous inputs and trying to produce a single text. Thus we appreciate significant specific input. We are looking for more input than "wordsmith" items, however editing and structural help are greatly appreciated where better clarity is the result.