SW-ACC1

```
Password:
Password:
SW-ACC1#show
SW-ACC1#show v
SW-ACC1#show vla
SW-ACC1#show vlan b
SW-ACC1#show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
10   Direccion                        active    Et0/0, Et0/1
99   Gestion                          active
999  Blackhole                        active    Et1/0, Et1/1, Et1/2, Et1/3
```

```
SW-ACC1#show interfaces trunk

Port        Mode             Encapsulation  Status        Native vlan
Et0/2       on               802.1q         trunking      1
Et0/3       on               802.1q         trunking      1

Port        Vlans allowed on trunk
Et0/2       10,99,999
Et0/3       10,99,999

Port        Vlans allowed and active in management domain
Et0/2       10,99,999
Et0/3       10,99,999

Port        Vlans in spanning tree forwarding state and not pruned
Et0/2       10,99,999
Et0/3       10,99,999
```

SW-ACC2

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
20   Administracion                   active    Et0/0, Et0/1
99   Gestion                          active
999  Blackhole                        active    Et1/0, Et1/1, Et1/2, Et1/3
```

```
SW-ACC2#show interfaces trunk

Port        Mode             Encapsulation  Status        Native vlan
Et0/2       on               802.1q         trunking      1
Et0/3       on               802.1q         trunking      1

Port        Vlans allowed on trunk
Et0/2       20,99,999
Et0/3       20,99,999

Port        Vlans allowed and active in management domain
Et0/2       20,99,999
Et0/3       20,99,999

Port        Vlans in spanning tree forwarding state and not pruned
Et0/2       20,99,999
Et0/3       20,99,999
```

SW-ACC3

```
SW-ACC3#show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
30   IT                               active    Et0/0, Et0/1
99   Gestion                          active
999  Blackhole                        active    Et1/0, Et1/1, Et1/2, Et1/3
```

```
SW-ACC3#show interfaces trunk

Port        Mode             Encapsulation  Status        Native vlan
Et0/2       on               802.1q         trunking      1
Et0/3       on               802.1q         trunking      1

Port        Vlans allowed on trunk
Et0/2       30,99,999
Et0/3       30,99,999

Port        Vlans allowed and active in management domain
Et0/2       30,99,999
Et0/3       30,99,999

Port        Vlans in spanning tree forwarding state and not pruned
Et0/2       30,99,999
Et0/3       30,99,999
```

SW-ACC4

```
SW-ACC4#Show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Et2/0, Et2/1, Et2/2, Et2/3
                                                Et3/0, Et3/1, Et3/2, Et3/3
40   Comercial                        active    Et0/0, Et0/1
99   Gestion                          active
999  Blackhole                        active    Et1/0, Et1/1, Et1/2, Et1/3
```

```
SW-ACC4#show interfaces trunk

Port        Mode             Encapsulation  Status        Native vlan
Et0/2       on               802.1q         trunking      1
Et0/3       on               802.1q         trunking      1

Port        Vlans allowed on trunk
Et0/2       40,99,999
Et0/3       40,99,999

Port        Vlans allowed and active in management domain
Et0/2       40,99,999
Et0/3       40,99,999

Port        Vlans in spanning tree forwarding state and not pruned
Et0/2       40,99,999
Et0/3       40,99,999
```

Core 1

```
Core1#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
Ethernet0/0            unassigned      YES unset  up                    up
Ethernet0/1            unassigned      YES unset  up                    up
Ethernet0/2            unassigned      YES unset  up                    up
Ethernet0/3            unassigned      YES unset  up                    up
Ethernet1/0            unassigned      YES unset  up                    up
Ethernet1/1            unassigned      YES unset  up                    up
Ethernet1/2            unassigned      YES unset  administratively down down
Ethernet1/3            unassigned      YES unset  administratively down down
Ethernet2/0            unassigned      YES unset  up                    up
Ethernet2/1            unassigned      YES unset  administratively down down
Ethernet2/2            unassigned      YES unset  administratively down down
Ethernet2/3            unassigned      YES unset  administratively down down
Ethernet3/0            unassigned      YES unset  administratively down down
Ethernet3/1            unassigned      YES unset  administratively down down
Ethernet3/2            unassigned      YES unset  administratively down down
Ethernet3/3            unassigned      YES unset  administratively down down
Serial4/0              unassigned      YES NVRAM  administratively down down
Serial4/1              unassigned      YES NVRAM  administratively down down
Serial4/2              unassigned      YES NVRAM  administratively down down
Serial4/3              unassigned      YES NVRAM  administratively down down
Serial5/0              unassigned      YES NVRAM  administratively down down
```

```
Vlan10                 192.168.0.2     YES NVRAM  down                    down
Vlan20                 192.168.1.2     YES NVRAM  down                    down
Vlan30                 192.168.2.2     YES NVRAM  down                    down
Vlan40                 192.168.3.2     YES NVRAM  down                    down
Vlan50                 192.168.50.1    YES NVRAM  up                      up
Vlan99                 10.99.99.1      YES NVRAM  down                    down
Core1#
Core1#
```

```
Core1#show standby brief
                     P indicates configured to preempt.
                     |
Interface   Grp  Pri P State   Active          Standby         Virtual IP
Vl10        10   110 P Init    unknown         unknown         192.168.0.1
Vl20        20   110 P Init    unknown         unknown         192.168.1.1
Vl30        30   110 P Init    unknown         unknown         192.168.2.1
Vl40        40   110 P Init    unknown         unknown         192.168.3.1
```

```
ool VLAN10 :
Utilization mark (high/low)    : 100 / 0
Subnet size (first/next)       : 0 / 0
Total addresses                : 254
Leased addresses               : 0
Excluded addresses             : 10
Pending event                  : none
1 subnet is currently in the pool :
Current index        IP address range                    Leased/Excluded/Total
192.168.0.1          192.168.0.1      - 192.168.0.254     0     / 10    / 254

ool VLAN20 :
Utilization mark (high/low)    : 100 / 0
Subnet size (first/next)       : 0 / 0
Total addresses                : 254
Leased addresses               : 0
Excluded addresses             : 10
Pending event                  : none
1 subnet is currently in the pool :
Current index        IP address range                    Leased/Excluded/Total
192.168.1.1          192.168.1.1      - 192.168.1.254     0     / 10    / 254
```

```
Pool VLAN30 :
 Utilization mark (high/low)    : 100 / 0
 Subnet size (first/next)       : 0 / 0
 Total addresses                : 254
 Leased addresses               : 0
 Excluded addresses             : 10
 Pending event                  : none
 1 subnet is currently in the pool :
 Current index        IP address range                    Leased/Excluded/Total
 192.168.2.1          192.168.2.1      - 192.168.2.254     0     / 10    / 254

Pool VLAN40 :
 Utilization mark (high/low)    : 100 / 0
 Subnet size (first/next)       : 0 / 0
 Total addresses                : 254
 Leased addresses               : 0
 Excluded addresses             : 10
 Pending event                  : none
 1 subnet is currently in the pool :
 Current index        IP address range                    Leased/Excluded/Total
 192.168.3.1          192.168.3.1      - 192.168.3.254     0     / 10    / 254

Pool VLAN50-Backup :
 Utilization mark (high/low)    : 100 / 0
 Subnet size (first/next)       : 0 / 0
 Total addresses                : 254
 Leased addresses               : 0
 Excluded addresses             : 10
 Pending event                  : none
 1 subnet is currently in the pool :
 Current index        IP address range                    Leased/Excluded/Total
 192.168.50.1         192.168.50.1     - 192.168.50.254    0     / 10    / 254
Core1#
```

core 2

```
Core2#show ip interface  brief
Interface              IP-Address      OK? Method Status                Protocol
Ethernet0/0            unassigned      YES unset  up                    up
Ethernet0/1            unassigned      YES unset  up                    up
Ethernet0/2            unassigned      YES unset  up                    up
Ethernet0/3            unassigned      YES unset  up                    up
Ethernet1/0            unassigned      YES unset  up                    up
Ethernet1/1            unassigned      YES unset  administratively down down
Ethernet1/2            unassigned      YES unset  administratively down down
Ethernet1/3            unassigned      YES unset  administratively down down
Ethernet2/0            172.16.1.2      YES manual up                    up
Ethernet2/1            unassigned      YES unset  up                    up
Ethernet2/2            unassigned      YES unset  up                    up
Ethernet2/3            unassigned      YES unset  up                    up
Ethernet3/0            unassigned      YES unset  up                    up
Ethernet3/1            unassigned      YES unset  up                    up
Ethernet3/2            unassigned      YES unset  up                    up
Ethernet3/3            unassigned      YES unset  up                    up
Serial4/0              unassigned      YES unset  administratively down down
Serial4/1              unassigned      YES unset  administratively down down
Serial4/2              unassigned      YES unset  administratively down down
Serial4/3              unassigned      YES unset  administratively down down
Serial5/0              unassigned      YES unset  administratively down down
Serial5/1              unassigned      YES unset  administratively down down
Serial5/2              unassigned      YES unset  administratively down down
Serial5/3              unassigned      YES unset  administratively down down
Vlan10                 192.168.0.3     YES manual up                    up
Vlan20                 192.168.1.3     YES manual up                    up
Vlan30                 192.168.2.3     YES manual up                    up
Vlan40                 192.168.3.3     YES manual up                    up
Vlan50                 192.168.50.2    YES manual up                    up
Vlan99                 10.99.99.2      YES manual up                    up
```

```
Core2#show standby brief
                     P indicates configured to preempt.
                     |
Interface   Grp  Pri P State   Active          Standby         Virtual IP
Vl10        10   100   Active  local           unknown         192.168.0.1
Vl20        20   100   Active  local           unknown         192.168.1.1
Vl30        30   100   Active  local           unknown         192.168.2.1
Vl40        40   100   Active  local           unknown         192.168.3.1
```

```
Core2#show interfaces trunk

Port        Mode             Encapsulation  Status        Native vlan
Et0/0       on               802.1q         trunking      1
Et0/1       on               802.1q         trunking      1
Et0/2       on               802.1q         trunking      1
Et0/3       on               802.1q         trunking      1
Et1/0       on               802.1q         trunking      1

Port        Vlans allowed on trunk
Et0/0       10,99,999
Et0/1       20,99,999
Et0/2       30,99,999
Et0/3       40,99,999
Et1/0       10,20,30,40,50,99,999

Port        Vlans allowed and active in management domain
Et0/0       10,99,999
Et0/1       20,99,999
Et0/2       30,99,999
Et0/3       40,99,999
Et1/0       10,20,30,40,50,99,999

Port        Vlans in spanning tree forwarding state and not pruned
Et0/0       10,99,999
Et0/1       20,99,999
Et0/2       30,99,999
Et0/3       40,99,999
Et1/0       10,20,30,40,50,99,999
```

```
Core2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       + - replicated route, % - next hop override

Gateway of last resort is 172.16.1.1 to network 0.0.0.0

S*    0.0.0.0/0 [1/0] via 172.16.1.1
      10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        10.99.99.0/24 is directly connected, Vlan99
L        10.99.99.2/32 is directly connected, Vlan99
      172.16.0.0/16 is variably subnetted, 2 subnets, 2 masks
C        172.16.1.0/30 is directly connected, Ethernet2/0
L        172.16.1.2/32 is directly connected, Ethernet2/0
      192.168.0.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.0.0/24 is directly connected, Vlan10
L        192.168.0.3/32 is directly connected, Vlan10
      192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.1.0/24 is directly connected, Vlan20
L        192.168.1.3/32 is directly connected, Vlan20
      192.168.2.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.2.0/24 is directly connected, Vlan30
L        192.168.2.3/32 is directly connected, Vlan30
      192.168.3.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.3.0/24 is directly connected, Vlan40
L        192.168.3.3/32 is directly connected, Vlan40
      192.168.50.0/24 is variably subnetted, 2 subnets, 2 masks
C        192.168.50.0/24 is directly connected, Vlan50
L        192.168.50.2/32 is directly connected, Vlan50
```

```
Core2#show run | include ip route
ip route 0.0.0.0 0.0.0.0 172.16.1.1
```

ISP 1

```
ISP1#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
Ethernet0/0            203.0.113.1     YES manual up                    up
Ethernet0/1            unassigned      YES NVRAM  administratively down down
Ethernet0/2            unassigned      YES NVRAM  administratively down down
Ethernet0/3            unassigned      YES NVRAM  administratively down down
Ethernet1/0            unassigned      YES NVRAM  administratively down down
Ethernet1/1            unassigned      YES NVRAM  administratively down down
Ethernet1/2            unassigned      YES NVRAM  administratively down down
Ethernet1/3            unassigned      YES NVRAM  administratively down down
Serial2/0              unassigned      YES NVRAM  administratively down down
Serial2/1              unassigned      YES NVRAM  administratively down down
Serial2/2              unassigned      YES NVRAM  administratively down down
Serial2/3              unassigned      YES NVRAM  administratively down down
Serial3/0              unassigned      YES NVRAM  administratively down down
Serial3/1              unassigned      YES NVRAM  administratively down down
Serial3/2              unassigned      YES NVRAM  administratively down down
Serial3/3              unassigned      YES NVRAM  administratively down down
```

```
ISP1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       + - replicated route, % - next hop override

Gateway of last resort is not set

S     172.16.0.0/16 [1/0] via 203.0.113.2
S     192.168.0.0/22 [1/0] via 203.0.113.2
S     192.168.50.0/24 [1/0] via 203.0.113.2
      203.0.113.0/24 is variably subnetted, 2 subnets, 2 masks
C        203.0.113.0/30 is directly connected, Ethernet0/0
L        203.0.113.1/32 is directly connected, Ethernet0/0
ISP1#
```

ISP 2

```
ISP2#SHOW IP INTErface BRIef
Interface              IP-Address      OK? Method Status                Protocol
Ethernet0/0            198.51.100.1    YES manual up                    up
Ethernet0/1            unassigned      YES NVRAM  administratively down down
Ethernet0/2            unassigned      YES NVRAM  administratively down down
Ethernet0/3            unassigned      YES NVRAM  administratively down down
Ethernet1/0            unassigned      YES NVRAM  administratively down down
Ethernet1/1            unassigned      YES NVRAM  administratively down down
Ethernet1/2            unassigned      YES NVRAM  administratively down down
Ethernet1/3            unassigned      YES NVRAM  administratively down down
Serial2/0              unassigned      YES NVRAM  administratively down down
Serial2/1              unassigned      YES NVRAM  administratively down down
Serial2/2              unassigned      YES NVRAM  administratively down down
Serial2/3              unassigned      YES NVRAM  administratively down down
Serial3/0              unassigned      YES NVRAM  administratively down down
Serial3/1              unassigned      YES NVRAM  administratively down down
Serial3/2              unassigned      YES NVRAM  administratively down down
Serial3/3              unassigned      YES NVRAM  administratively down down
ISP2#
```

```
ISP2#SHOW IP ROUTE
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       + - replicated route, % - next hop override

Gateway of last resort is not set

S     172.16.0.0/16 [1/0] via 198.51.100.2
S     192.168.0.0/22 [1/0] via 198.51.100.2
S     192.168.50.0/24 [1/0] via 198.51.100.2
      198.51.100.0/24 is variably subnetted, 2 subnets, 2 masks
C        198.51.100.0/30 is directly connected, Ethernet0/0
L        198.51.100.1/32 is directly connected, Ethernet0/0
ISP2#
```

ç

FW1

```
FW1(config)#hostname FW1
FW1(config)#enable secret Cisco1234
FW1(config)#no ip domain-lookup
FW1(config)#service password-encryption
FW1(config)#interface e0/0
FW1(config-if)# description WAN1-ISP1
FW1(config-if)# ip address 203.0.113.2 255.255.255.252
FW1(config-if)# ip nat outside
FW1(config-if)# no shutdown
FW1(config-if)#interface e0/1
FW1(config-if)# description HA-SYNC-FW2
FW1(config-if)# ip address 172.16.99.1 255.255.255.252
FW1(config-if)# no shutdown
FW1(config-if)#interface e0/2
FW1(config-if)# description DMZ
FW1(config-if)# ip address 172.16.10.1 255.255.255.0
FW1(config-if)# ip nat inside
FW1(config-if)# no shutdown
FW1(config-if)#interface e0/3
FW1(config-if)# description LAN-CORE1
FW1(config-if)# ip address 172.16.0.1 255.255.255.252
FW1(config-if)# ip nat inside
FW1(config-if)# no shutdown
FW1(config-if)#ip route 0.0.0.0 0.0.0.0 203.0.113.1
FW1(config)#ip route 192.168.0.0 255.255.252.0 172.16.0.2
FW1(config)#ip route 192.168.50.0 255.255.255.0 172.16.0.2
FW1(config)#access-list 10 permit 192.168.0.0 0.0.3.255
FW1(config)#access-list 10 permit 192.168.50.0 0.0.0.255
FW1(config)#access-list 10 permit 172.16.10.0 0.0.0.255
FW1(config)#ip nat inside source list 10 interface e0/0 overload
FW1(config)#ip access-list extended FW-ENTRADA-WAN
FW1(config-ext-nacl)# permit tcp any any established
FW1(config-ext-nacl)# permit icmp any any echo-reply
FW1(config-ext-nacl)# permit tcp any host 172.16.10.10 eq 80
```

```
FW1(config-ext-nacl)#interface e0/2
FW1(config-if)# ip access-group FW-DMZ-POLICY in
FW1(config-if)#end
FW1#write memory
*Mar 22 09:26:37.111: %SYS-5-CONFIG_I: Configured from console by console
FW1#write memory
```

FW2

```
FW2#enable
FW2#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
FW2(config)#hostname FW2
FW2(config)#enable secret Cisco1234
FW2(config)#no ip domain-lookup
FW2(config)#service password-encryption
FW2(config)#interface e0/0
FW2(config-if)# description WAN2-ISP2
FW2(config-if)# ip address 198.51.100.2 255.255.255.252
FW2(config-if)# ip nat outside
FW2(config-if)# no shutdown
FW2(config-if)#interface e0/1
FW2(config-if)# description HA-SYNC-FW1
FW2(config-if)# ip address 172.16.99.2 255.255.255.252
FW2(config-if)# no shutdown
FW2(config-if)#interface e0/2
FW2(config-if)# description DMZ-BACKUP
FW2(config-if)# ip address 172.16.10.2 255.255.255.0
FW2(config-if)# ip nat inside
FW2(config-if)# no shutdown
FW2(config-if)#interface e0/3
FW2(config-if)# description LAN-CORE2
FW2(config-if)# ip address 172.16.1.1 255.255.255.252
FW2(config-if)# ip nat inside
FW2(config-if)# no shutdown
FW2(config-if)#ip route 0.0.0.0 0.0.0.0 198.51.100.1
FW2(config)#ip route 192.168.0.0 255.255.252.0 172.16.1.2
FW2(config)#ip route 192.168.50.0 255.255.255.0 172.16.1.2
FW2(config)#access-list 10 permit 192.168.0.0 0.0.3.255
FW2(config)#access-list 10 permit 192.168.50.0 0.0.0.255
FW2(config)#access-list 10 permit 172.16.10.0 0.0.0.255
FW2(config)#ip nat inside source list 10 interface e0/0 overload
FW2(config)#ip access-list extended FW-ENTRADA-WAN
FW2(config-ext-nacl)# permit tcp any any established
FW2(config-ext-nacl)# permit icmp any any echo-reply
FW2(config-ext-nacl)# permit tcp any host 172.16.10.10 eq 80
```

```
FW2(config-ext-nacl)# deny ip 172.16.10.0 0.0.0.255 192.168.0.0 0.0.3.255 log
FW2(config-ext-nacl)#$2.16.10.0 0.0.0.255 192.168.50.0 0.0.0.255 log
FW2(config-ext-nacl)# permit ip 172.16.10.0 0.0.0.255 any
FW2(config-ext-nacl)#interface e0/2
FW2(config-if)# ip access-group FW-DMZ-POLICY in
FW2(config-if)#end
FW2#write memory
*Mar 22 09:27:26.531: %SYS-5-CONFIG_I: Configured from console by console
FW2#write memory
```

PING ENTRE VLANS PC1 A PC3

```
PC1> ip dhcp
DORA IP 192.168.0.12/24 GW 192.168.0.2

PC1> ping 192.168.1.11

84 bytes from 192.168.1.11 icmp_seq=1 ttl=63 time=1.646 ms
84 bytes from 192.168.1.11 icmp_seq=2 ttl=63 time=0.615 ms
84 bytes from 192.168.1.11 icmp_seq=3 ttl=63 time=0.605 ms
84 bytes from 192.168.1.11 icmp_seq=4 ttl=63 time=0.542 ms
84 bytes from 192.168.1.11 icmp_seq=5 ttl=63 time=0.506 ms

PC1>
```

```
PC3> ip 192.168.1.11 255.255.255.0 192.168.1.2
Checking for duplicate address...
PC3 : 192.168.1.11 255.255.255.0 gateway 192.168.1.2

PC3> dhcp
DORA IP 192.168.1.11/24 GW 192.168.1.2

PC3>
```

Ping PC1 DMZ-Web (172.16.10.10)

PC1 ping 172.16.10.11 (DMZ-Mail)

```
PC1> ping 172.16.10.11

84 bytes from 172.16.10.11 icmp_seq=1 ttl=62 time=1.242 ms
84 bytes from 172.16.10.11 icmp_seq=2 ttl=62 time=0.763 ms
84 bytes from 172.16.10.11 icmp_seq=3 ttl=62 time=0.831 ms
84 bytes from 172.16.10.11 icmp_seq=4 ttl=62 time=0.732 ms
84 bytes from 172.16.10.11 icmp_seq=5 ttl=62 time=0.791 ms
```

PC1 ping 172.16.10.12 (DMZ-DNS)

```
PC1> ping 172.16.10.12

84 bytes from 172.16.10.12 icmp_seq=1 ttl=62 time=1.415 ms
84 bytes from 172.16.10.12 icmp_seq=2 ttl=62 time=0.772 ms
84 bytes from 172.16.10.12 icmp_seq=3 ttl=62 time=0.665 ms
84 bytes from 172.16.10.12 icmp_seq=4 ttl=62 time=0.784 ms
84 bytes from 172.16.10.12 icmp_seq=5 ttl=62 time=0.840 ms
```

PC1 ping 203.0.113.1 (ISP1 — Internet

```
PC1> ping 203.0.113.1

84 bytes from 203.0.113.1 icmp_seq=1 ttl=253 time=0.683 ms
84 bytes from 203.0.113.1 icmp_seq=2 ttl=253 time=0.743 ms
84 bytes from 203.0.113.1 icmp_seq=3 ttl=253 time=0.678 ms
84 bytes from 203.0.113.1 icmp_seq=4 ttl=253 time=0.610 ms
84 bytes from 203.0.113.1 icmp_seq=5 ttl=253 time=0.704 ms
```

PC1 ping 192.168.2.11 (PC5 VLAN30)

```
PC1> ping 192.168.2.11

84 bytes from 192.168.2.11 icmp_seq=1 ttl=63 time=0.542 ms
84 bytes from 192.168.2.11 icmp_seq=2 ttl=63 time=0.865 ms
84 bytes from 192.168.2.11 icmp_seq=3 ttl=63 time=0.626 ms
84 bytes from 192.168.2.11 icmp_seq=4 ttl=63 time=0.572 ms
84 bytes from 192.168.2.11 icmp_seq=5 ttl=63 time=0.541 ms
```

PC1 ping 192.168.3.11 (PC7 VLAN40)
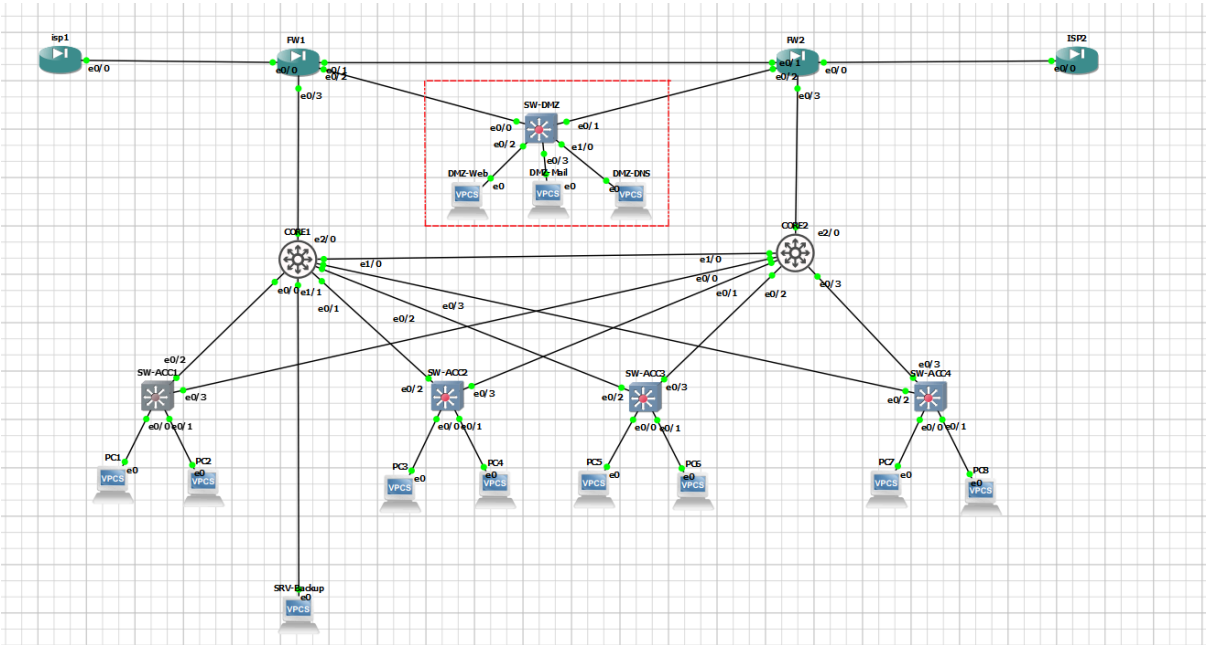
```
PC1> ping 192.168.3.11

84 bytes from 192.168.3.11 icmp_seq=1 ttl=63 time=0.855 ms
84 bytes from 192.168.3.11 icmp_seq=2 ttl=63 time=0.945 ms
84 bytes from 192.168.3.11 icmp_seq=3 ttl=63 time=0.843 ms
84 bytes from 192.168.3.11 icmp_seq=4 ttl=63 time=0.877 ms
84 bytes from 192.168.3.11 icmp_seq=5 ttl=63 time=0.887 ms
```