STATEMENT OF WORK
FALL ARREST SYSTEM INSPECTION
Fairchild Air Force Base, Washington

DESCRIPTION OF WORK. Contractor shall perform annual inspections of the fall protection systems located in building 2050 hangars No. 1, 2, 3, & 4 located at Fairchild AFB, Washington. Building 2050 is located in a controlled area. Escorts will be provided by the government as coordinated in advance to perform services. Non-U.S. citizen workers are prohibited from accessing the controlled area. The annual inspection shall be performed in accordance with all federal, state, local regulations and manufacturer recommendations. The inspection is necessary to ensure continued compliance with OSHA Regulations and manufacturer recommendations. The contractor shall provide an 85-foot lift to access the system.

As a minimum the inspection shall consist of the following actions:

- A hands on inspection of all components of the installed system
- Visually verify all end terminations
- Tighten all lock nuts to the required torque
- Inspect for presence of cotter pins where appropriate
- Check for damage to all components including cable along its entire length, intermediate brackets and end termination
- Inspect intermediate brackets for excessive deformation
- Perform minor repairs as needed
- Photo document any in-depth repairs that may be required
- Inspect user equipment supplied with the original system or replacement of same make and model, including harnesses and lanyards.
- Perform all other actions required to comply with OSHA and/or manufacturer's inspection requirements.

The inspection will be limited to the engineered system components installed by Evan Corporation or manufactured by Capital Safety Group and installed by others.

At the completion of the inspection, the contractor shall issue a written report attesting to the condition of the system and its conformance with OSHA Regulations. The report shall include an estimate for any repairs that may be required.

OPERATIONS SECURITY (OPSEC) REQUIREMENTS. The contractor will protect critical and/or sensitive information from disclosure. The DoD contractor will:

1. Be familiar with their organization's critical information. When publicly posting or publishing work-related information that potentially contains critical or sensitive information airmen are encouraged to solicit the advice of their immediate supervisor, security office and/or OPSEC Program Manager/Coordinator.

2. Consider attempts by unauthorized personnel to solicit critical and/or sensitive information as human intelligence (HUMINT) gathering and consider it a HUMINT incident. Contract personnel who have been involved in or have knowledge of a possible incident will report all facts immediately to the nearest supporting Air Force Office of Special Investigations (AFOSI) office.

3. If AFOSI is not readily available, HUMINT incidents will be reported to the organization's security manager or commander who will ensure that, without exception, reports are relayed as securely and expeditiously within 24 hours to the nearest AFOSI organization.

HOURS OF OPERATION. The normal hours of operation are 0800-1700, Monday-Friday excluding federal holidays. The following federal holidays are observed:

January 1	New Years Day
3rd Monday in January	Martin Luther King, Jr. Day
3rd Monday in February	President's Day
Last Monday in May	Memorial Day
July 4	Independence Day
1st Monday in September	Labor Day
2nd Monday in October	Columbus Day
November 11	Veterans Day
4th Thursday in November	Thanksgiving Day
December 25	Christmas

ATTACHMENTS:

1. Inspection Criteria

Chapter 13

FALL PROTECTION

13.1. Scope. This chapter provides the requirements to implement an effective fall protection program where employees are exposed to fall hazards while assigned to work at height. Fall protection program requirements include program policies, duties, and responsibilities, fall hazard survey, fall protection procedures, rescue procedures, training, equipment selection, inspections and maintenance, incident investigation, and evaluating program effectiveness. Most DAF operations fall under the following industries:

13.1.1. General Industry. Fall protection requirements will be followed whenever employees are exposed to fall hazards greater than four feet or any height where a fall would land an employee onto or in hazardous machinery/equipment. **(T-0)** Refer to 29 CFR § 1910, Subpart D – *Walking-Working Surfaces,* for additional requirements. The following requirements will be referenced first and areas not prescribed in these chapters will be covered by this chapter. **(T-0)**

13.1.1.1. Telecommunications Work. Refer to **Chapter 28** of this instruction and 29 CFR § 1910.268, *Telecommunications,* for additional requirements and guidance.

13.1.1.2. Electrical Power Generation, Transmission and Distribution Work. Refer to 29 CFR § 1910.269, *Electric Power Generation, Transmission, and Distribution*, for additional requirements and guidance.

13.1.1.3. Aircraft Flightline Operations. Flightline fall protection operations will meet the requirements of this chapter and **Chapter 24**. **(T-1)**

13.1.2. Construction Operations. Fall protection requirements will be followed whenever employees are exposed to fall hazards greater than six feet or any height where a fall would land an employee onto or in hazardous machinery/equipment. **(T-0)** Refer to 29 CFR § 1926, Subpart M – *Fall Protection,* for additional requirements.

13.1.3. This chapter does not apply to the following:

13.1.3.1. Portable Ladders. Refer to **Chapter 7** of this instruction, 29 CFR § 1910.23, *Ladders*, and 29 CFR § 1926.1053, *Ladders*, for additional requirements and guidance.

13.1.3.2. When employers are inspecting, investigating, or assessing workplace conditions or work to be performed prior to the start of the work or after all work has been performed. Refer to 29 CFR § 1910.28. **Note:** This exemption does not apply when fall protection systems or equipment meeting the requirements of 29 CFR § 1910.29 have been installed and are available for employees to use for pre-work and post-work inspections, investigations, or assessments.

13.1.3.3. To fall hazards presented by the exposed perimeters of entertainment stages and the exposed perimeters of rail-station platforms.

13.1.3.4. Powered Platforms, Aerial Lifts and Scaffolding. Refer to **Chapter 16** of this standard, 29 CFRs § 1910.66(j), *Powered Platforms for Building Maintenance,* 1910.67(c)(2)(v), *Vehicle-Mounted Elevating and Rotating Work Platforms*, and 1910.27, *Scaffolds and Rope Descent Systems*, for additional requirements and guidance.

13.1.4. Fire and Emergency Services. Fall protection will be provided for F&ES personnel when exposed to falls greater than four feet during routine operations as stipulated by General Industry standards (29 CFR § 1910, Subpart D) when not working as a rescue service. **(T-0)** When acting as a rescue service, F&ES personnel will adhere to requirements from NFPA 1006, *Standard for Technical Rescue Personnel Professional Qualifications,* NFPA 1670, *Standard on Operations and Training for Technical Search and Rescue Incidents,* NFPA 101, *Life Safety Code,* and other applicable standards. **(T-0)**

13.2. Fall Protection Program.

13.2.1. Fall Protection Policy. A policy statement will be developed that states the commander's commitment to providing a safe workplace for employees working at heights. **(T-1)** The policy will also provide general goals, guidance, and responsibilities for the fall protection program. **(T-1)**

13.2.2. Duties and Responsibilities.

13.2.2.1. Commander. The commander is ultimately responsible for the development and implementation of the fall protection program that promotes a safe and healthy workplace. The commander must ensure that the individuals selected to administer the organization's fall protection program, or act as a qualified or competent person have the required education, training, and experience to safely conduct their duties. **(T-1)**

13.2.2.2. Fall Protection Program Administrator. The fall protection program will be coordinated by a member identified as a qualified or competent person as defined in paragraphs 13.2.2.3 and 13.2.2.4. **(T-1)**

13.2.2.2.1. This person acts as an administrative liaison between the organization and the occupational safety office to ensure fall protection program compliance and will be identified in writing by the commander. **(T-1)**

13.2.2.2.2. The program administrator advocates for needed fall protection training, and equipment identified by supervisors, qualified persons, and competent persons to the commander. Additionally, they maintain the currency of fall protection requirements and ensure self-evaluation of organizational compliance and coordinate incident investigations. **(T-1)**

13.2.2.3. Qualified Person will:

13.2.2.3.1. Be a person, who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training, and experience has successfully demonstrated the ability to solve or resolve problems relating to the subject matter, the work, or the project. **(T-0)**

13.2.2.3.2. Supervise the design, selection, installation, use, and inspection of certified anchorages and horizontal lifelines. **(T-0)**

13.2.2.3.3. Participate in incident investigations for falls while working under this chapter. **(T-1)**

13.2.2.3.4. Be designated in writing by the commander. **(T-1)** If the qualified person comes from outside the organization, documentation of the service agreement will be kept on file. **(T-1)**

13.2.2.4. Competent Person will:

13.2.2.4.1. Be a person who can identify existing and predictable hazards in any personal fall protection system or any component of it, as well as in their application and uses with related equipment, and who has authorization to take prompt, corrective action to eliminate the identified hazards. **(T-0)**

13.2.2.4.2. Supervise use of fall protection equipment and ensure that the equipment has been installed, inspected, and used to meet manufacturer's instructions, OSHA requirements, and this standard. **(T-0)**

13.2.2.4.3. Conduct fall hazard survey IAW **paragraph 13.3**. **(T-1)**

13.2.2.4.4. Prepare, review, update, and approve fall protection and rescue procedures IAW **paragraph 13.4**. **(T-1)**

13.2.2.4.5. Verify that authorized persons have completed fall protection training and remain knowledgeable of current procedures. **(T-1)**

13.2.2.4.6. Inspect fall protection equipment at least quarterly, and ensure defective or damaged equipment is removed from service. **(T-1)**

13.2.2.4.7. Participate in incident investigations related to falls from heights. **(T-1)**

13.2.2.4.8. Be designated in writing by the commander. **(T-1)**

13.2.2.5. Authorized Person will:

13.2.2.5.1. Know the nature of the fall hazards in their work area and how to recognize them. **(T-0)**

13.2.2.5.2. Follow the procedures required in the installation, inspection, operation, maintenance, and disassembly of personal fall protection systems used. **(T-0)**

13.2.2.5.3. Correctly use the assigned personal fall protection systems. **(T-0)**

13.2.2.5.4. Follow the instructions of competent persons and know how to report all unsafe or hazardous conditions. **(T-0)**

13.2.2.5.5. Conduct pre-use inspections of personal fall protection equipment for defects or damage and notify the competent person of any discrepancies. **(T-1)** Defective or damaged equipment will be properly disposed of per competent person direction and not used. **(T-0)**

13.2.2.6. Occupational Safety. The occupational safety staff (or applicable tenant safety staff) will provide advice and guidance to the Fall Protection Program Administrator of the organizational fall protection program elements. **(T-1)** **Note**: Occupational safety professionals do not fully meet the requirements of a qualified or competent person and will not be used to fulfill those roles in an organization's program. **(T-1)** These duties include:

13.2.2.6.1. Assisting in fall hazard surveys and development of written fall protection and rescue procedures to ensure rescue procedures, equipment, and training meet fall protection requirements in **paragraph 13.4**. **(T-1)**

13.2.2.6.2. Identifying unabated fall hazards and providing a RAC and tracked IAW DAFI 91-202. **(T-1)**

13.2.2.6.3. Conducting thorough annual review of fall protection program elements and documenting results annually in safety inspection/assessment reports. **(T-1)**

13.2.2.7. F&ES Flight. The F&ES Flight will assist in the fall hazard surveys and development of written fall protection and rescue procedures. The F&ES Flight will ensure equipment and training meet fall protection requirements in **paragraph 13.3** and **paragraph 13.4**. **(T-1)** The F&ES Flight may also act as the competent rescuer when trained and equipped to meet the needs to perform rescues at height under the organization's specific requirements, when included in the organizational rescue plan and agreed to by the fire chief.

13.2.2.8. Authorized Rescuers will:

13.2.2.8.1. Be trained to evaluate and recognize the hazards that may endanger them during rescue operations at height. **(T-1)**

13.2.2.8.2. Inspect the rescue equipment prior to a rescue event, verify that all equipment is in operable condition, and ensure the equipment is securely stored until needed. **(T-1)**

13.2.2.8.3. Verify that a rescue procedure has been developed for the fall arrest system(s) in use and review the procedure prior to use to properly implement the procedure. **(T-1)**

13.2.2.9. Supervisors. Supervisors will: (**Note**: Refer to DAFI 91-202 for additional responsibilities.)

13.2.2.9.1. Ensure each authorized, qualified, and competent person using a fall protection/fall arrest system is trained and evaluated on proper use, application, and inspection of fall protection/fall arrest systems. **(T-1)** A supervisor may also be a qualified, competent and/or authorized person if they meet the requirements of **Chapter 13.6.**

13.2.2.9.2. Be familiar with the shop's typical work assignments and where fall protection/fall arrest systems are required. **(T-1)**

13.2.2.9.3. Be responsible for the procurement of fall protection and fall arrest systems required by the organization or shop as directed by the qualified person. **(T-1)**

13.2.2.9.4. Be able to provide recommendations for qualified and competent personnel in the organization to the commander. **(T-1)**

13.2.2.10. Trainers. Trainers will be designated in writing by the commander. **(T-1)** Trainers will have the required experience and knowledge to deliver training at the level they are expected to instruct and be qualified, as an instructor, to train personnel on fall protection requirements. **(T-1) Note**: If the trainer comes from outside the organization, documentation of the service agreement will be kept on file. **(T-1)**

13.3. Fall Hazard Survey. A fall hazard survey will be conducted in all work areas where employees are exposed to fall hazards. **(T-1)** The survey team will be led by the organization's competent/qualified person(s) and be made up of the work center supervisors, authorized persons,

occupational safety office, and F&ES Flight. **(T-1)** Team composition allows all personnel to provide input identifying fall hazards and how to protect against those hazards. Proper identification of fall hazards and appropriate controls for each work area and/or task will ensure that the best solutions are used. **(T-1)**

13.3.1. A fall hazard survey will include:

13.3.1.1. Identification of fall hazards and include details of each hazard such as: **(T-1)**

13.3.1.1.1. Means of access to the fall hazards.

13.3.1.1.2. Locations of the fall hazards.

13.3.1.1.3. Tasks that create exposure to fall hazards.

13.3.1.1.4. Hidden fall hazards that are not always readily apparent.

13.3.1.2. Pertinent information about the fall hazards to include showing its basic configuration. **(T-1) Note**: Use of graphics, drawings and/or photographs are highly encouraged.

13.3.1.3. Identification of environmental factors that will affect the installation, use, inspection, maintenance, and dismantling of any fall protection system. **(T-1) Note:** This is not an all-inclusive list of fall or environmental hazards:

13.3.1.3.1. Electrical. Wire rope or rope covered wire lanyards, some plastics (such as nylon), and wet lanyards are conductive and will not be used near electrical hazards.

13.3.1.3.2. Thermal. Heat that can damage equipment or injure employees, such as welding splatter.

13.3.1.3.3. Chemical. Some chemicals can degrade the PPE material and/or injure an employee.

13.3.1.3.4. Sharp edges and abrasive surfaces can cut lanyards and/or injure employees.

13.3.1.4. Conduct a risk assessment to determine the level of risk for each fall hazard identified. **(T-1)** Each hazard will be assigned a RAC, as necessary. **(T-1)** Refer to DAFI 91-202 for additional guidance on RACs.

13.3.1.5. Appropriate abatement actions, as required by DAFI 91-202. **(T-1)**

13.3.1.6. Selected fall protection method(s) for each identified hazard. **Note**: If PFAS are selected, the calculation of all clearances will be included in the written fall protection procedures. Employees will not use PFAS until adequate clearances are available.

13.3.1.7. Appropriate PPE based on hazards identified will be addressed in the Fall Hazard Survey. Refer to **Chapter 14** for additional information.

13.3.2. Competent or qualified person will prepare the fall hazard survey report and submit copies to the fall protection program administrator, F&ES Flight, and occupational safety office. **(T-1)**

13.3.3. Fall hazard surveys will be updated or re-accomplished when changes occur in the work center. **(T-1)** Copies of completed fall hazard surveys will be maintained by the fall

protection program administrator and be available to all qualified, competent, and authorized employees for reference. **(T-1)**

13.3.4. When fall hazards are identified resulting from item or equipment upgrades, modification or replacements, the DAF item managers (depot level) will perform necessary functions (e.g., describing planned upgrades, costs, timetables, and prioritization), for DAF equipment not meeting fall protection standards. **(T-1)**

13.4. Written Fall Protection and Rescue Procedures. Fall protection and rescue procedures will be documented specifically for each workplace (location) and/or task they are applied to when the use of fall protection is required. **(T-1)** If a procedure can be effectively used in multiple workplaces/tasks, then the same procedure can be used. Procedures will be prepared and modified by a qualified or competent person as defined in this chapter. **(T-1)** Fall protection and rescue procedures will be reviewed at least annually for currency and accuracy. **(T-1) Note:** Fall protection equipment/procedures that are effective in one location or for a specific task, can be completely unacceptable in another location or for other tasks.

13.4.1. Written procedures will include:

13.4.1.1. Purpose of the fall protection procedure. **(T-1)**

13.4.1.2. Location and photographs/diagrams of the fall hazard(s) and fall protection system setup. **(T-1)**

13.4.1.3. Appropriate standards, regulations or requirements for the task(s) conducted at height. **(T-1)**

13.4.1.4. Training requirements for the fall protection procedure based on the fall protection equipment required. **(T-1)**

13.4.1.5. Fall protection system design parameters that assure 100% protection from fall hazards. **(T-1) Note**: Include fall calculations based on identified equipment and equipment design parameters, which include a detailed list of PPE, who developed the procedure, when it was developed, system certifications, and inspection logs.

13.4.1.6. Equipment requirements, to include: **(T-1)**

13.4.1.6.1. Identification of acceptable anchorages and tie off techniques. **(T-0)**

13.4.1.6.2. Validation of clearance requirements. **(T-0)**

13.4.1.6.3. Procedure to safely access and egress from the system. **(T-1)**

13.4.1.6.4. Identification of limitations in the use of the fall protection system. **(T-1)**

13.4.1.7. Procedures documenting how to safely erect, use and dismantle the fall protection equipment. **(T-1)**

13.4.1.8. Preparatory actions to be conducted by the supervisor to ensure authorized persons know the fall protection and rescue procedures. **(T-1)**

13.4.1.9. Steps to take when work is completed, e.g., clean up, storage. **(T-1)**

13.4.1.10. Fallen employees will be rescued in a prompt manner to prevent physical injury or death. **(T-0)** A detailed rescue plan will ensure rescue meets this standard, which includes:

13.4.1.10.1. Coordination with outside rescue agencies (F&ES Flight, contracted rescue, organization, etc.) to determine requirements to ensure prompt rescue of fallen personnel as part of preplanning. **(T-1)** Competent person will ensure pre-planning with the outside rescue agency is completed prior to work start. **(T-1)**

13.4.1.10.2. Procedures to contact the rescue agency if a fall occurs. **(T-1)**

13.4.1.10.3. Training on actions an authorized person can take to attempt self-rescue, when possible. **(T-1)**

13.4.1.10.4. Actions to be taken by the organization to rescue fallen authorized personnel who are unable to self-rescue. **(T-1)**

13.4.1.10.5. Location of rescue anchorage. **(T-1)**

13.4.1.10.6. Appropriate rescue equipment to use based on pre-identified requirements. **(T-1)**

13.4.1.10.7. Location of attachment to fallen employee's harness. **(T-1)**

13.4.1.10.8. Specific actions to achieve successful rescue. **(T-1)** Rescue training will include specific first aid requirements to prevent further injury/death when employee is removed from suspension after a fall. **(T-1)**

13.4.1.10.9. Required training for rescuers. **(T-1)**

13.4.2. The organization will establish good lines of communication with the F&ES Flight or a contracted rescue agency for prompt rescue of a fallen employee. **(T-1)** When rescue by the F&ES Flight or contracted agencies is unavailable, then the organization will ensure a rescue team is available or hold operations until available. **(T-1)** (**Warning**: Hanging in a harness for extended time periods can be fatal. Consideration should be given to purchasing and utilizing suspension trauma prevention devices to extend the time to ensure prompt rescue.)

13.5. Fall Protection Plans. Fall protection plans will be used only in construction, for residential roofs, leading edge work and precast concrete erection work. **(T-0)** The written plan will be coordinated with the occupational safety office (or applicable tenant Safety office) before the plan and its procedural controls are used. **(T-1)** When it is determined to not be feasible to use fall protection systems while on residential roofs as identified in 29 CFR § 1910.28(b)(1)(ii), a written fall protection plan, meeting the requirements of 29 CFR § 1926.502(k) and coordinated with the occupational safety office, will be developed by a qualified person. **(T-0)** Training for the fall protection plan must meet the requirements of 29 CFR § 1926.503(a) and (c). **(T-0) Note**: A corrective action plan will be accomplished describing planned upgrades (equipment, cost, and timetable, prioritized by the shop) and appropriate RACs, to eliminate need, partially or totally, for procedural controls. **(T-1)** Consistent with OSHA guidelines, cost will not be a consideration for selecting the fall protection plan's procedural controls versus implementing fall protection. **(T-0)**

13.6. Training. Before employees are exposed to a fall hazard, training will be completed IAW 29 CFR § 1910.30, *Training Requirements,* and for construction use IAW 29 CFR § 1926.503, *Training Requirements*. **(T-0)**

13.6.1. Authorized personnel will be trained by a competent or qualified person trained to instruct authorized personnel in their duties under the fall protection program. **(T-0)** Trainers conducting fall protection and rescue training must be qualified to train in the following areas:

13.6.1.1. The nature of the fall hazards in the work area and how to recognize them. **(T-0)**

13.6.1.2. The procedures to be followed to minimize those hazards. **(T-0)**

13.6.1.3. The correct procedures for installing, inspecting, operating, maintaining, and disassembling the personal fall protection systems that the employee uses. **(T-0)**

13.6.1.4. The correct use of personal fall protection systems and equipment, including, but not limited to, proper hook-up, anchoring, and tie-off techniques, and methods of equipment inspection and storage, as specified by the manufacturer. **(T-0)**

13.6.1.5. The employer must train each employee who uses a dock board to properly place and secure it to prevent unintentional movement. **(T-0)**

13.6.1.6. The employer must train each employee who uses a rope descent system in proper rigging and use of the equipment IAW 29 CFR § 1910.27. **(T-0)**

13.6.1.7. The employer must train each employee who uses a designated area in the proper set-up and use of the area. **(T-0)**

13.6.2. Qualified and competent persons will be trained by an instructor who has the level of knowledge and is qualified to instruct to ensure the employee who completes the training can perform their duties as a qualified or competent person, as applicable. **(T-0)** The instructor will ensure the employee who completes the training can perform their duties as a qualified or competent person, as applicable. **(T-0)** Personnel trained as a qualified person must also meet the training requirements of a competent person before applying fall protection system principles. **(T-1)**

13.6.3. Program administrators will be trained on all equipment and practices applicable to the scope of work in the organization's program. **(T-1)**

13.6.4. Retraining. Supervisors will ensure authorized persons are retrained in fall protection when: **(T-0)**

13.6.4.1. Changes in the workplace render previous training obsolete or inadequate. **(T-0)**

13.6.4.2. Changes in the types of fall protection systems or equipment to be used render previous training obsolete or inadequate. **(T-0)**

13.6.4.3. Inadequacies in an affected employee's knowledge or use of fall protection systems or equipment indicate that the employee no longer has the requisite understanding or skill necessary to use equipment or perform the job safely. **(T-0)**

13.6.5. Recurring Training. Recurring training will be performed and documented for example, use an attendance sheet, at least annually, to maintain employee proficiency. **(T-1)** Recurring training will include an in-depth review of current procedures and introduce any new or revised control methods and procedures, as necessary. **(T-1)**

13.6.5.1. Competent and authorized persons who are also identified as rescuers must meet requirements as identified in paragraphs **13.2.2.8** and **13.6.2**. **(T-1)**

13.6.5.2. Program administrators will also attend annual recurring training to maintain currency. **(T-1)**

13.6.6. Training Documentation. All training, e.g., initial, retraining, and recurring, will be documented with the following information:

13.6.6.1. Name of the employee trained. **(T-0)**

13.6.6.2. The date(s) of the training. **(T-0)**

13.6.6.3. The signature of the person who conducted the training or the signature of the employer. **(T-0)**

13.7. Fall Protection Equipment and General Information. After conducting fall hazard surveys and identifying the fall hazards involved, the next step is to evaluate the appropriate control(s) to implement to protect the employees. The following provides a not all-inclusive reference to appropriate controls and equipment to use when having employees work at height.

13.7.1. Hierarchy of Controls.

13.7.1.1. Elimination. The preferred method of protecting employees from falls at height is to remove the hazard completely. Evaluate whether it is necessary to put an employee at height to do the work or can the operation be restructured to allow an employee to do the same task at ground level.

13.7.1.2. Prevention. Many fall hazards are controlled using prevention techniques that include guardrails, walls, covers, or parapets to prevent exposure to the fall. Specific requirements for these items can be found in **Chapter 7,** *Walking – Working Surfaces.*

13.7.1.3. Engineering Controls. The use of engineering controls requires the consideration of design changes to equipment or different techniques while working at height such as reaching the work location using an aerial lift, scaffold, or powered platform/manlift/vehicle mounted work platform. Guidance on requirements to safely use this equipment is found in **Chapter 16,** *Mobile Elevating Work Platforms and Scaffolding.*

13.7.1.4. Personal Protective Systems and Equipment. This control includes the equipment used for work positioning, travel restraint, and fall arrest. This control sits low on the list due to variations of compliance in how well an employee dons, doffs, cleans, and maintains their equipment; how well supervisors enforce the use of PPE; and how well suited the PPE selected is to the hazard identified.

13.7.1.5. Administrative Controls. This is the least protective of the controls as it does not prevent exposure to the fall hazard or arrest the fall of an employee. Administrative controls are only allowed in very limited situations.

13.7.2. Types of Fall Protection. Fall protection systems are designed to protect employees from fall hazards. When determining specific requirements to address fall hazards refer to 29 CFR § 1910, Subpart D, *Walking – Working Surfaces,* 29 CFR § 1910, Subpart I, *Personal Protective Equipment,* and manufacturer's documentation.

13.7.2.1. Passive fall protection, such as guardrails, work stands, and platforms (aircraft maintenance stands, e.g., B-1, B-4, B-5), safety nets, and other devices can prevent an employee from falling but are not directly connected to the employee. If passive fall protection is not feasible, active fall protection is next, the preferred option. **Note:** Nets do

not prevent an employee from falling but do prevent an employee from hitting the next level.

13.7.2.2. Active fall protection devices include, but are not limited to, ladder climbing devices and personal fall arrest, positioning, and restraint systems with each described below:

13.7.2.2.1. Ladder safety systems ensure personnel can safely climb fixed ladders and prevent falls to the next level. A typical system contains an anchorage, lifeline, harness, and connectors.

13.7.2.2.2. Positioning systems allow an employee to be supported while working on an elevated, vertical working surface with both hands free. The positioning equipment includes a body harness, connectors, and an anchorage.

13.7.2.2.3. Travel restraint systems restrict an employee's range of movement to prevent the possibility of an employee falling off the walking/working surface. The travel restraint system contains an anchorage, full body harness, and a lanyard (or other means of connection).

13.7.2.2.4. Personal fall arrest systems (PFAS) arrest an employee's fall and limits arresting loads to generally safe levels to prevent the employee from falling to the next lower level. A PFAS includes an anchorage, body harness, and connectors.

13.7.3. Equipment Inspections and Maintenance.

13.7.3.1. PFAS users will comply with manufacturer's instructions or use TO 00-25-245, *Operations Instructions - Testing and Inspection Procedures for Personnel Safety and Rescue Equipment,* for inspection, maintenance, cleaning, and storage requirements. **(T-1)** When defects or damage to equipment is found due to inadequate maintenance of equipment, improper storage, improper use, or from wear on the system, the equipment will be immediately tagged unserviceable and removed from service. **(T-1)** Unserviceable PFAS will be destroyed to prevent further use. Inspections will be documented IAW TO 00-25-245 or manufacturer's instructions, whichever is more restrictive. **(T-1)**

13.7.3.2. Authorized person(s) will inspect PFAS prior to use. **(T-0)**

13.7.3.3. Qualified/competent persons will ensure all PFAS components receive a thorough inspection at least quarterly. **(T-1)** This inspection will be documented and maintained. **(T-1)** **Exception**: Components of a PFAS that have been professionally installed and certified will be inspected IAW manufacturer's instructions, at the interval recommended by the manufacturer, and by a person qualified to perform the inspection. Inspection will be documented and maintained. **(T-1)**

13.7.3.4. Supervisors will maintain manufacturer's instructions and performance testing information for PFAS used by their employees. **(T-1)**

13.7.3.5. For overseas locations, the use of anchorage points is authorized when the host country provides documentation of applicable testing and inspections.

13.7.3.6. Fall protection anchorage connectors attached to overhead rail systems (i.e., I-beams and trolley) will be completely inspected by a qualified person per manufacturer

data. **(T-0)** The anchorages (i.e., I-beam, trolley) will be inspected by a qualified person at least every five years or dependent on results of annual qualified person inspections. **(T-0)**

13.8. Incident Investigation. Falls from heights where the employee utilized active fall protection equipment as described in **paragraph 13.7.2.2,** regardless of whether an injury or damage has occurred, will be investigated by a qualified or competent person. **(T-1)** The qualified or competent person can request assistance from occupational safety personnel in completing their investigation. A copy of the completed investigation will be reported to the servicing occupational safety office. **(T-1)** The incident investigation is an organizational level process to determine the cause of the fall and is used to correct any issues found in procedures, equipment, or rescue, as applicable. Where the fall results in required mishap investigation, due to injuries and/or property damage, per DAFI 91-204, then the safety mishap investigation will take priority. **(T-1)**

13.8.1. The incident report will be provided to the fall protection program administrator to review the team's findings and recommendations for corrections to the organization's program. **(T-1)**

13.8.2. Final report will be routed to the commander for review and signature within 10 days of report completion. **(T-1)**

13.8.3. The program administrator will then develop a corrective action plan to ensure the approved corrective actions are acted upon in the timeline established. **(T-1)**

13.8.4. The fall protection program administrator will maintain a minimum of three years of completed incident reports. **(T-1)**

13.8.5. The occupational safety office will annually conduct review of incident reports to determine any trends. **(T-1)**

13.9. Fall Protection Assessments.

13.9.1. At least annually, the fall protection program administrator, with assistance from each affected workplace supervisor, will conduct an internal assessment of the organization's program to evaluate.

13.9.1.1. Training curriculum and documentation are current. **(T-1)**

13.9.1.2. Fall hazard surveys are current. **(T-1)**

13.9.1.3. Policy statement and documentation of identified personnel are current. **(T-1)**

13.9.1.4. Review of written fall and rescue procedures to ensure currency. **(T-1)**

13.9.1.5. Review of all fall protection equipment and anchorages to ensure they are serviceable, current on required inspections, properly stored and maintained, and reviewed to determine if still appropriate to address fall hazards. **(T-1)** Reviewing new options to currently used equipment to address identified fall hazards provides the opportunity to find and evaluate new solutions that better address the fall hazards and better protect employees by using higher level hierarchy of controls such as elimination versus continuing to use PPE.


13.9.1.6. Review of incident investigations. **(T-1)**

13.9.1.7. Provide a report, with recommendations where identified, to the commander for review and approval within 10 days of completion. **(T-1)**

13.9.2. The occupational safety office or tenant occupational safety office(s) will complete an annual assessment of fall protection program requirements for each organization and document results as required in DAFI 91-202. **(T-1)**

Inspection, Care & Maintenance

Horizontal Lifelines

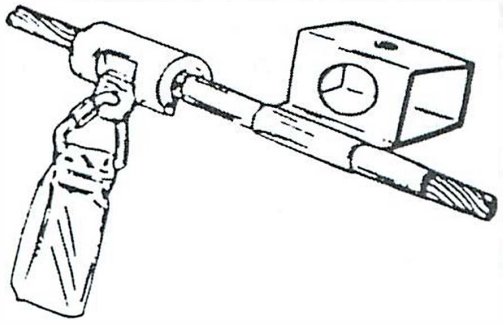

Frequency:
Visually inspect anchors and connectors before each use in accordance with manufacturer's instructions. **Damaged systems and components must be removed from service immediately.**

In the event of a fall, the system must be removed from service, inspected, repaired and recertified for use by Evan Corporation.

Inspect system components for:

- Excessive corrosion, dents, cracks, fraying and deformities.
- Check end anchor fasteners and intermediate brackets (end anchors must be torqued at 75 ft.lbs. and intermediate brackets at 18 ft.lbs.).
- Check site label(s) making sure they are present, legible, and secured near an access location.
- Inspect User Equipment per associated manufacturer's instructions. Check connecting means for wear or deformities.

Maintenance, Service and Storage

1. Remove dirt from the cable using a fiber brush. Do not use a wire brush. Do not apply any solvents or lubricants without prior approval. Clean all other components with a non-abrasive cloth and hot water/mild detergent mix. Dry with clean cloth. Do not use solvents to clean any component.

2. Refer to the instructions supplied with the harness, lanyard and self-retracting lifeline for cleaning and servicing procedures. Store the harness, lanyard or self-retracting lifeline in a cool, dry clean environment and out of direct sunlight.

3. As required, apply a light water repellant lubricant (i.e. WD40) sparingly to the link hinge on connectors.

WARNING!

Do not apply any lubricant to the inner surfaces of the connector without prior approval. Do not apply any lubricant to the cable.

4. Additional maintenance and servicing procedures (i.e. replacement parts) must be completed by a factory authorized service center. Authorization must be in writing.

Inspection, Care & Maintenance

Rigid Rail - Enclosed Track and Wide Flange Beams

- Check site label(s) making sure they are present, legible, and secured near an access location.
- Inspect system prior to each use as per ANSI.
- Inspect User Equipment per associated manufacturer's instructions.
- Refer to the instructions supplied with the harness, lanyard and self-retracting lifeline for cleaning and servicing procedures. Store the harness, lanyard or self-retracting lifeline in a cool, dry clean environment and out of direct sunlight.
- In the event of a fall, the system must be removed from service until it is inspected and approved for use.

Connecting Means

Connecting means attach the worker to the fall protection system. Examples of connecting components in a fall protection system are:

- Sayflink sleeve, Evolution shuttle, Ariana shuttle or beam trolley
- Shock absorbing lanyard
- Self-locking snap hook
- Auto-locking carabiner
- Self-retracting lifeline (SRL)
- Retrieval Self-Retracting Lifeline (RSRL)

