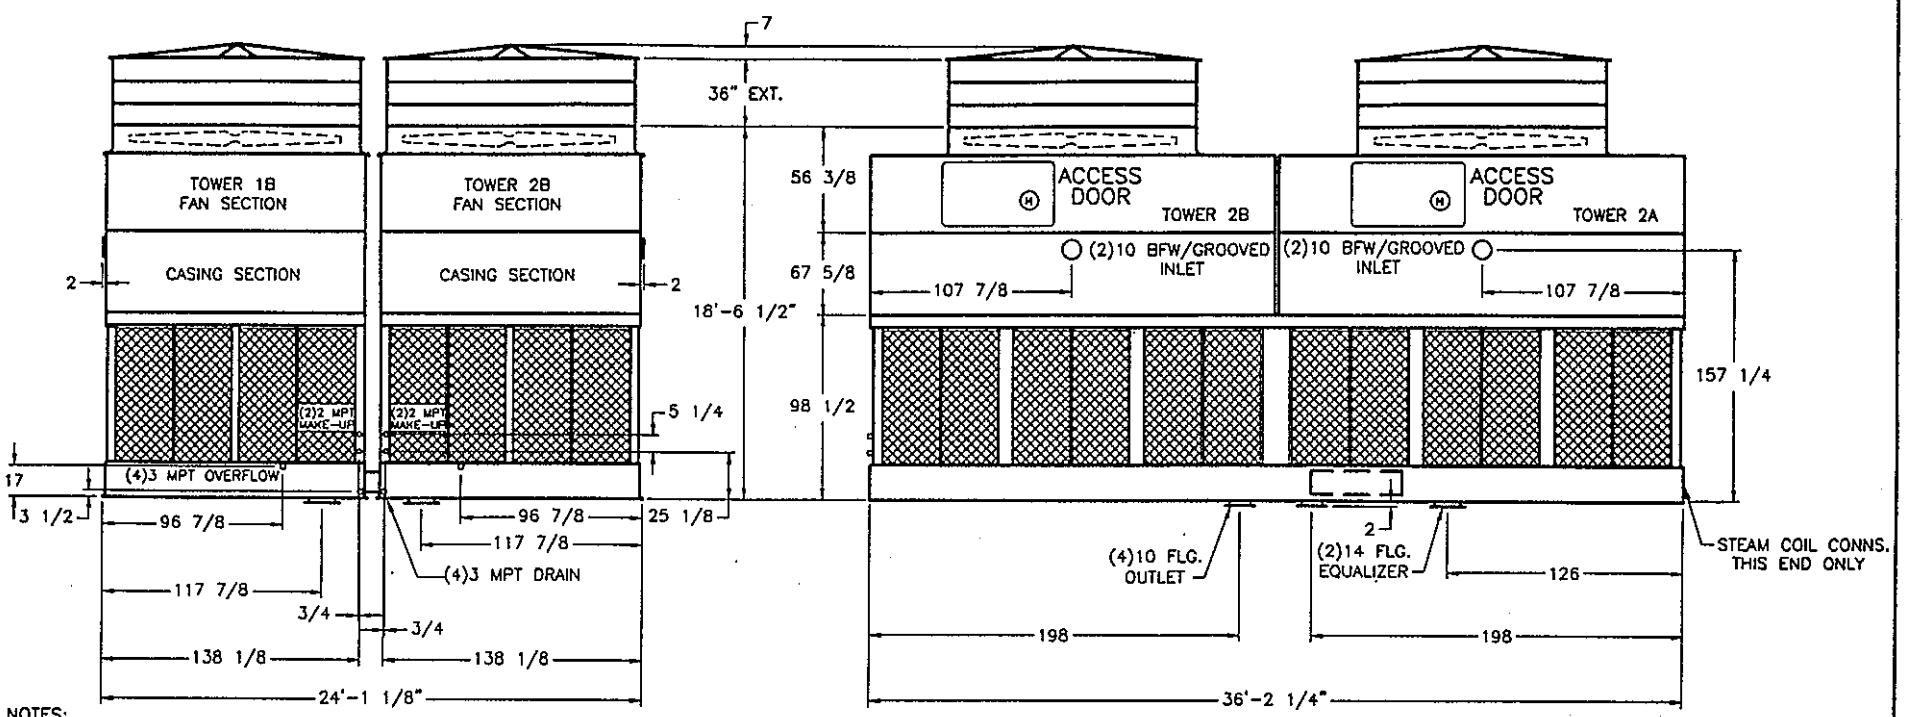


NOTES:

1. Ⓜ -FAN MOTOR LOCATION
2. MAKE-UP WATER PRESSURE 25psi MIN. 125psi MAX.
3. 3/4" DIA. MOUNTING HOLES. REFER TO RECOMMENDED STEEL SUPPORT DRAWING.
4. HEAVIEST SECTION IS LOWER SECTION. WEIGHT INCLUDES 1670 lb. REMOVABLE SKID.
5. BFW DENOTES BEVELED FOR WELDING.
   FPT DENOTES FEMALE PIPE THREADS.
   MPT DENOTES MALE PIPE THREADS.
6. FAN SECTION WEIGHT IS 3730 lbs. EACH. THERE ARE (4)FAN SECTIONS FOR THIS UNIT.
   CASING SECTION WEIGHT IS 5560 lbs. EACH. THERE ARE (4)CASING SECTIONS FOR THIS UNIT.
   SECTION WEIGHT INCLUDES 810 lb. SKID.
   PAN SECTION WEIGHT IS 7180 lbs. EACH. THERE ARE (2)PAN SECTIONS FOR THIS UNIT.
   SECTION WEIGHT INCLUDES 1670 lb. SKID.
7. FAN AND CASING SECTIONS WILL BE SHIPPED WITHOUT SEALER TAPE BETWEEN SECTION JOINT. SECTIONS MUST BE UNBOLTED PRIOR TO LIFTING. SEALER TAPE TO BE INSTALLED DURING RIGGING.
8. FAN CYLINDERS WILL BE SHIPPED LOOSE FOR FIELD MOUNTING. EACH SECTION WILL BE 3'-7" TALL.

WEIGHTS (LB)			NO. SHIPPING SECTIONS	NO. RIGGING SECTIONS
SHIPPING	OPER.	HEAVIEST SECTION		
51520	88800	7180	10	14

MODEL NUMBER: AT 424-936 COOLING TOWER TAG: TOWER 1 & 2

CERTIFIED FOR AMERICAN COMBUSTION, INC. PROJECT: BUREAU OF ENGRAVING & PRINTING

CUSTOMER ORDER NO. 6744 EVAPCO NO. 997139M

CAPACITY 8,250 G.P.M. 95 °F IN 85 °F OUT 78 °F E.W.B.

FAN MOTOR HP (4) 60 ELEC. SPEC. 460/60/3

INLET PRESSURE 2.7 P.S.I.G. DRIVES SIZED FOR 0" ESP.

REMARKS: UNIT FURNISHED WITH 5-PROBE ELECTRIC WATER LEVEL CONTROL PACKAGE, (4) EXTERNAL SERVICE PLATFORMS WITH (4) LADDERS & SAFETY CAGES, (4) VIBRATION CUTOUT SWITCHES, STAINLESS STEEL STEAM HEATER COILS, 3' STAINLESS STEEL FAN CYLINDER EXTENSION (TO SHIP ASSEMBLED WITH FAN SCREENS ATTACHED, ON SEPARATE TRUCK), (2) 14" FLANGED EQUALIZER CONNECTIONS, (4) 10" FLANGED OUTLET CONNECTIONS AND ALL STAINLESS STEEL CONSTRUCTION PER SPECIFICATION SHEET. NOTE: STENCIL UNIT LEFT HAND SECTION 1A & 1B, AND RIGHT HAND SECTION 2A & 2B.

evapco

COOLING TOWER

T2243648ERA-05

997139

REVISION 10-19-99

EVAPCO EQUIPMENT PRODUCTION ORDER
(CONFIDENTIAL)

UNIT # AT 424-936
SERIAL # 997139
CUSTOMER AMERICAN COMBUSTION

DATE ISSUED 10-6-99
DATE SCHED 11-12-99

SCREENS: (8) 5-60PA GALV OR (8) 5-69PA SST
FANS: (4)132" 7 BL 380MM 12 DEG PITCH BRGS: (8) RAO 2 11/16
CAD PLATED FAN BUSHINGS: (4)R1 2 7/16

PAN: 24X36 FLOAT (4)2" OUTLET (4)10" STRAINER (8) 35*009SA 60"
(4) 66-15026PA 60"
W/PLENUM TAG PANS CT-1 & CT-2

TAG CASING & FANS CT-1A/CT-1B & CT-2A & CT-2B

CASING: (4)12X18/4LYR NOZZLES: 24

FILL:

1ST LAYER	POINTED TIP:	(96)BLKS 107 7/8X12X12
2ND LAYER	ALT. TIP:	(72)BLKS 71 5/8X12X12
2ND LAYER	(CONTINUED)	(72)BLKS 66 5/8X12X12
3RD LAYER	ALT. TIP:	(96)BLKS 107 7/8X12X12
4TH LAYER	ALT. TIP:	(72)BLKS 71 5/8X12X12
4TH LAYER	(CONTINUED)	(72)BLKS 66 5/8X12X12

FAN CYLINDERS SHIP ASSEMBLED WITH FAN SCREENS MOUNTED - ALSO MOUNT LIFTING EARS

FAN MOTOR: (4) 60 HP 230-460/60/3 RPM: 1800 FRAME: _____
MFG: _____ PO#: _____ SPECIAL: TEAO_____

DRIVES: DRIVER (4) 6B7.6 (AL) 13-225P DRIVER BUSH (4) SF2 3/8 (CAD) 13-419P
DRIVEN (4) 6B 38.0 (AL) 13-222P DRIVEN BUSH (4) E-2 7/16 (CAD) 13-412P
BELTS (4) 6BX 158 13-294P

ACCESSORIES:

REMOTE SUMP	ELEC H20 LEVEL CONTROL 5, PROBE	LADDER	4 VIBRATION SWITCH	FLANGED CONNS.
GEAR DRIVE SYSTEM	BOTTOM SCREENS	___FT LADDER EXTENSION	JIB BOOM	SHIP W/ MOTORS MOUNTED
( ) ___KW ( )PAN HTRS ___/___/___	EQUALIZER 2-14" BOTTOM	SAFETY CAGE	VIBRATION RAILS	FLUME PLATE
STAINLESS STEEL BASIN	STAINLESS STEEL COMPLETE	STAINLESS STEEL BASIN & FRP CASING	STAINLESS STEEL FAN CYLINDER	STAINLESS STEEL FAN SCREENS

STAINLESS STEEL STEAM COIL

CONNS. ARE ON ONE END ONLY

OUTLETS + EQUALIZERS SHIP MOUNTED

FLANGED EQUALIZERS

REMARKS: 10" BFW/GROOVED INLETS 10" FLANGED BOTTOM OUTLETS - EXTERNAL SERVICE PLATFORMS WITH LADDER & SAFETY CAGE - 3' FAN CYLINDER EXTENSION

PIECES: 6 FAN SHAFTS ARE GROUND & POLISHED STEEL WEIGHT: 49,840#

ON UPPER MAKE-UP CONN. - ADD EXTENSION TO MAKE PIPE LONGER THAN LOWER MAKE-UP CONN. PIPE

FAN SCREENS ARE GALVANIZED
BOLT LOOSELY FOR HELICOPTER LIFT - ADD LIFTING EARS WHERE NECESSARY