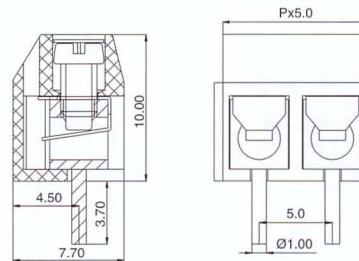



**KF301-5.0****材质及电镀**

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

**MATERIAL**

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

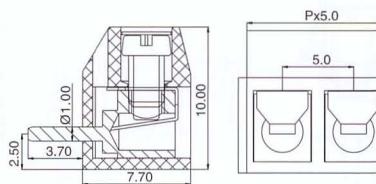
**机械性能**

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5~5mm

**MECHANICAL**

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5~5mm

认证: CE

**KF301R-5.0****材质及电镀**

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

**MATERIAL**

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

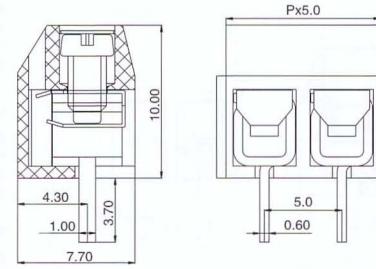
**机械性能**

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5~5mm

**MECHANICAL**

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5~5mm

认证: CE

**KF306-5.0****材质及电镀**

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

**MATERIAL**

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

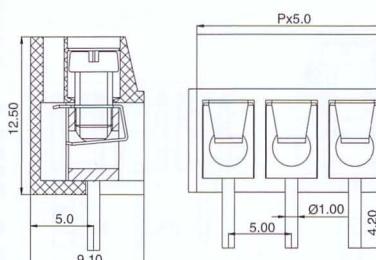

**机械性能**

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5~5mm

**MECHANICAL**

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5~5mm

认证: CE

**KF300-5.0****材质及电镀**

间距: 5.0mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

**MATERIAL**

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M3, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

**机械性能**

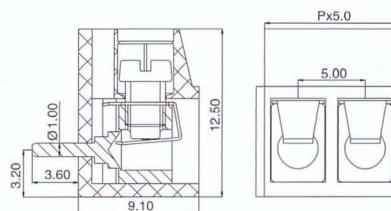

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5~5mm

**MECHANICAL**

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5~5mm

认证: CE

### KF300R-5.0



#### 材质及电镀

间距: 5.0mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

#### MATERIAL

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M3, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

#### 电气性能

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

#### ELECTRICAL

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

#### 机械性能

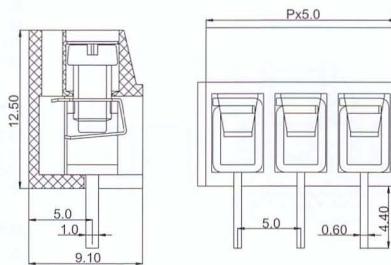

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5-5mm

#### MECHANICAL

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5-5mm

认证: CE

### KF305-5.0



#### 材质及电镀

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

#### MATERIAL

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

#### 电气性能

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

#### ELECTRICAL

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

#### 机械性能

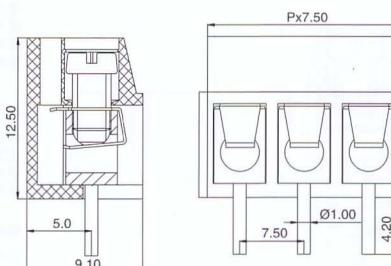

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5-5mm

#### MECHANICAL

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5-5mm

认证: CE

### KF370-7.5



#### 材质及电镀

间距: 7.5mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

#### MATERIAL

Pitch: 7.5mm  
Poles: 2P, 3P  
Screws: M3, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

#### 电气性能

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

#### ELECTRICAL

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

#### 机械性能

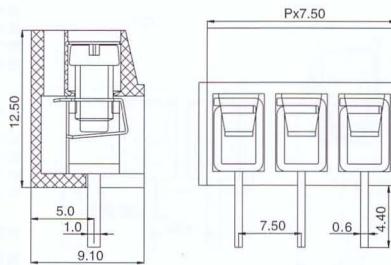

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5-5mm

#### MECHANICAL

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5-5mm

认证: CE

### KF375-7.5



#### 材质及电镀

间距: 7.5mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PBT.UL94V-0

#### MATERIAL

Pitch: 7.5mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PBT. UL94V - 0

#### 电气性能

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 22-14AWG

#### ELECTRICAL

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-14AWG

#### 机械性能

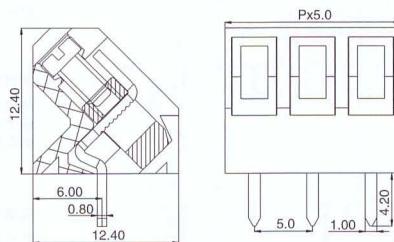

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 4.5-5mm

#### MECHANICAL

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 4.5-5mm

认证: CE

## KF330-5.00



## 材质及电镀

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 黄铜、镀镍  
塑件: PBT.UL94V-0

## MATERIAL

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire cage: Brass, Ni plated  
Pin header: Brass, Tin plated  
Housing: PBT, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 15A  
耐电压: AC2000V/1Min  
使用线径: 22-12AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 15A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-12AWG

## 机械性能

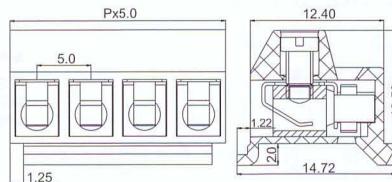

温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5 lb.in )  
剥线长度: 4.5-5mm

## MECHANICAL

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm ( 3.5 lb.in )  
Strip length: 4.5-5mm

认证: CE

## KF331-5.0



## 材质及电镀

间距: 5.0mm  
极数: 2P-24P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0mm  
Poles: 2P-24P  
Screw: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Zi plated  
Wire cage:Brass, Zi plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 28-14AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 28-14AWG

## 机械性能

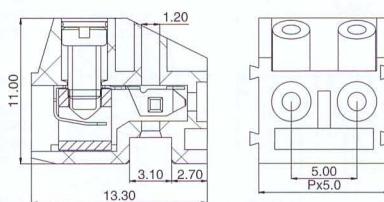

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5 lb.in )  
剥线长度: 5-6mm

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm ( 3.5 lb.in )  
Strip length: 5-6mm

认证: CE

## KF332K-5.0



## 材质及电镀

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍  
方扣: 黄铜、镀镍  
塑件: PBT.UL94V-0

## MATERIAL

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated  
Wire cage:Brass, Zi plated  
Housing: PBT, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-14AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-14AWG

## 机械性能

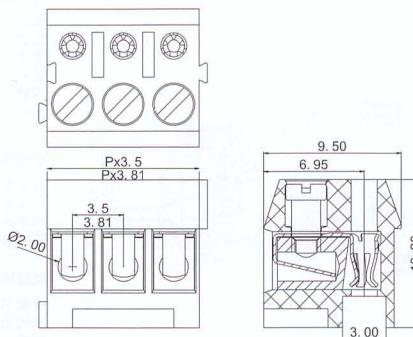
温度范围: -30°C~+120°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5 lb.in )  
剥线长度: 4.5mm

## MECHANICAL

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm ( 3.5 lb.in )  
Strip length: 4.5mm

认证: CE

## KF332K-3.5/3.81



## 材质及电镀

间距: 3.5/3.81mm  
极数: 2P、3P  
螺丝: M2、钢、镀锌  
簧片: 磷青铜、镀镍  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 3.5/3.81mm  
Poles: 2P, 3P  
Screws: M2, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated  
Wire cage:Brass, Zi plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 8 A  
耐电压: AC2000V/1Min  
使用线径: 28-16AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 8 A  
Withstanding voltage: AC2000V/1Min  
Wire range: 28-16AWG


## 机械性能

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.2Nm ( 1.7 lb.in )  
剥线长度: 5-6mm

## MECHANICAL

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.2 Nm ( 1.7 lb.in )  
Strip length: 5-6mm

认证: CE

**KF332J-5.0****材质及电镀**

间距: 5.0mm  
极数: 2P~24P  
焊针: 黄铜、镀锌  
塑件: PBT.UL94V-0

**MATERIAL**

Pitch: 5.0mm  
Poles: 2P~24P  
Pin header: Brass、 Tin plated  
Housing: PBT. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage:AC2000V/1Min


**机械性能**

温度范围: -30°C~+120°C  
瞬时温度: +250°C5秒

**MECHANICAL**

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.

认证: CE

**KF332J-3.5/3.81****材质及电镀**

间距: 3.5/3.81mm  
极数: 2P~24P  
焊针: 黄铜、镀锌  
塑件: PBT.UL94V-0

**MATERIAL**

Pitch: 3.5/3.81mm  
Poles: 2P~24P  
Pin header: Brass、 Tin plated  
Housing: PBT. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 8 A  
耐电压: AC2000V/1Min

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 8 A  
Withstanding voltage:AC2000V/1Min


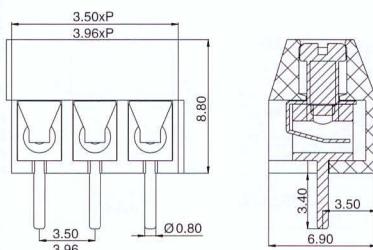
**机械性能**

温度范围: -30°C~+120°C  
瞬时温度: +250°C5秒

**MECHANICAL**

Temp range: -30°C~+120°C  
MAX soldering: + 250°C for 5 sec.

认证: CE

**KF350-3.5/KF396-3.96****材质及电镀**

间距: 3.5mm/3.96mm  
极数: 2P、3P  
螺丝: M2、钢、镀锌  
簧片: 碳青铜、镀镍或不锈钢  
焊针: 黄铜、镀锌  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 3.5mm/3.96mm  
Poles: 2P、3P  
Screws: M2、Steel、Zinc plated  
Wire guard: phosphor bronze、Ni plated or stainless steel  
Pin header: Brass、 Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC1250V/1Min  
使用线径: 24~18AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage:AC1250V/1Min  
Wire range: 24~18AWG


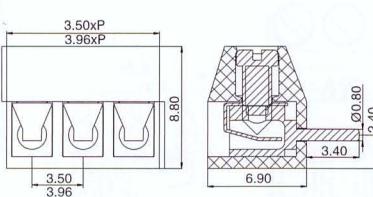
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C5秒  
扭矩: 0.2Nm ( 1.8lb.in )  
剥线长度: 4.5~5mm

**MECHANICAL**

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.2 Nm ( 1.8 lb.in )  
Strip length: 4.5~5mm

认证: CE

**KF350R-3.5/KF396R-3.96****材质及电镀**

间距: 3.5mm/3.96mm  
极数: 2P、3P  
螺丝: M2、钢、镀锌  
簧片: 碳青铜、镀镍或不锈钢  
焊针: 黄铜、镀锌  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 3.5mm/3.96mm  
Poles: 2P、3P  
Screws: M2、Steel、Zinc plated  
Wire guard: phosphor bronze、Ni plated or stainless steel  
Pin header: Brass、 Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC1250V/1Min  
使用线径: 24~18AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage:AC1250V/1Min  
Wire range: 24~18 AWG

**机械性能**

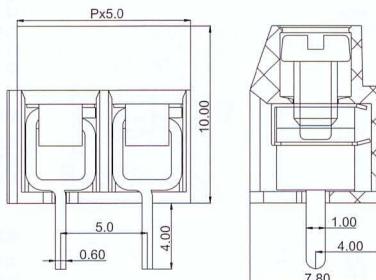
温度范围: -40°C~+105°C  
瞬时温度: +250°C5秒  
扭矩: 0.2Nm ( 1.8lb.in )  
剥线长度: 4.5~5mm

**MECHANICAL**

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.2 Nm ( 1.8 lb.in )  
Strip length: 4.5~5mm

认证: CE

KF126-5.0



## 材质及电镀

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 250V  
额定电流: 8A  
耐电压: AC2000V/1Min  
使用线径: 26-14A WG

## ELECTRICAL

Rated voltage: 250V  
Rated current: 8A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-14A WG

## 机械性能

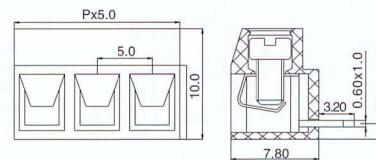
温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

## MECHANICAL

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: CE

KF126R-5.0



## 材质及电镀

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 250V  
额定电流: 8A  
耐电压: AC2000V/1Min  
使用线径: 26-14A WG

## ELECTRICAL

Rated voltage: 250V  
Rated current: 8A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-14A WG

## 机械性能

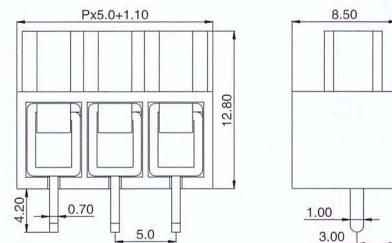

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

## MECHANICAL

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: CE

KF166-5.0



## 材质及电镀

间距: 5.0mm  
极数: 2P-24P  
螺丝: M3、钢、镀锌  
簧片: 磷青铜、镀镍或不锈钢  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0mm  
Poles: 2P-24P  
Screws: M3, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 16A  
耐电压: AC2000V/1Min  
使用线径: 18-12AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 16A  
Withstanding voltage: AC2000V/1Min  
Wire range: 18-12AWG

## 机械性能

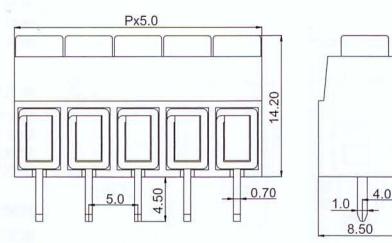

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

## MECHANICAL

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm (4.4 lb.in)  
Strip length: 6-7mm

认证: CE

KF168-5.0



## 材质及电镀

间距: 5.0mm  
极数: 2P-24P  
螺丝: M2.5、钢、镀锌  
簧片: 磷青铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0mm  
Poles: 2P-24P  
Screws: M2.5, Steel, Zinc plated  
Wire guard: phosphor bronze, Ni plated or stainless steel  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 250V  
额定电流: 15A  
耐电压: AC2000V/1Min  
使用线径: 22-12AWG

## ELECTRICAL

Rated voltage: 250V  
Rated current: 15A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-12AWG

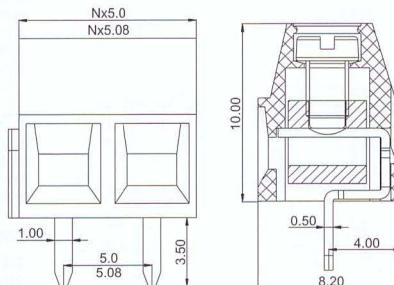
## 机械性能

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

## MECHANICAL

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: CE

**KF127-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 钢、镀锌、或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

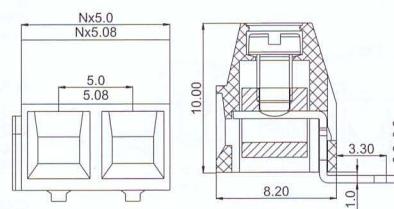
**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-16AWG

**MECHANICAL**

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5lb.in)  
Strip length: 4-5mm

认证: CE

**KF127R-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 钢、镀锌、或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

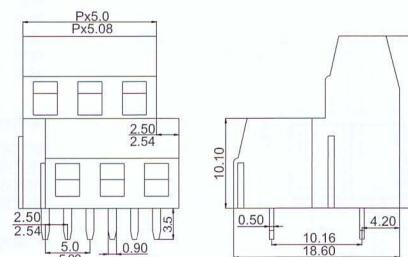

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-16AWG

**MECHANICAL**

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5lb.in)  
Strip length: 4-5mm

认证: CE

**KF127A-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 钢、镀锌、或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

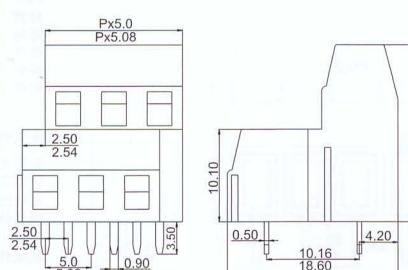

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-16AWG

**MECHANICAL**

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5lb.in)  
Strip length: 4-5mm

认证: CE

**KF127B-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 钢、镀锌、或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screws: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**ELECTRICAL**

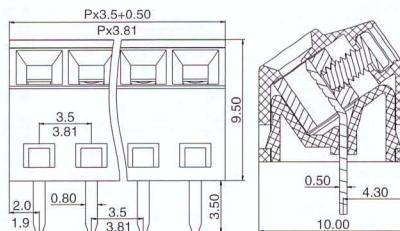

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-16AWG

**MECHANICAL**

Temp range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5lb.in)  
Strip length: 4-5mm

认证: CE

## KF127S-3.5/3.81



## 材质及电镀

间距: 3.5/ 3.81mm  
极数: 2P-24P  
螺丝: M2 钢 锌  
焊脚: 黄铜 锌  
方扣: 黄铜 锌  
塑件: PA66 UL94V-0

## MATERIAL

Pitch: 3.5/ 3.81mm  
Poles: 2P-24P  
Screw: M2 Steel,Zinc plated  
Terminal: Brass,Tin plated  
Wire cage: Brass,Ni plated  
Housing: PA66 UL94V-0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 28-16 AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 28-16 AWG

## 机械性能

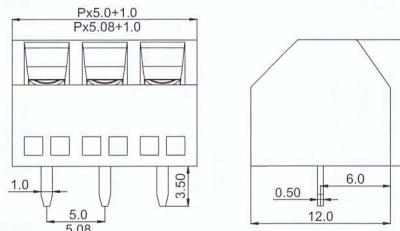

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.2Nm(1.8Lb.in)  
剥线长度: 5-6mm

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: +250°C 5sec  
Torque: 0.2Nm(1.8Lb.in)  
Strip length: 5-6mm

认证: CE

## KF127S-5.0/5.08



## 材质及电镀

间距: 5.0/5.08mm  
极数: 2P-24P  
螺丝: M2.5、钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0/5.08mm  
Poles: 2P-24P  
Screw: M2.5, Steel, Zinc plated  
Pin header: Brass, Ni plated  
Housing: PA66. UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 12A  
耐电压: AC2000V/1Min  
使用线径: 26-16AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 12A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-16AWG

## 机械性能

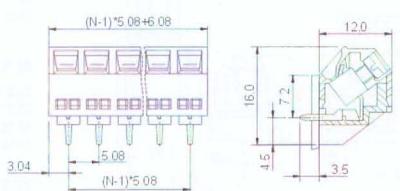

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 7mm

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250 °C for 5 sec.  
Torque: 0.4Nm ( 3.5lb.in )  
Strip length: 7mm

认证: CE

## KF127SF-5.08



## 材质及电镀

间距: 5.08mm  
极数: 2P-24P  
螺丝: M2.5、钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.08mm  
Poles: 2P-24P  
Screws: M2.5, Steel, zinc plated  
Pin header: Brass, Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66. UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 26-16A WG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 26-16A WG

## 机械性能

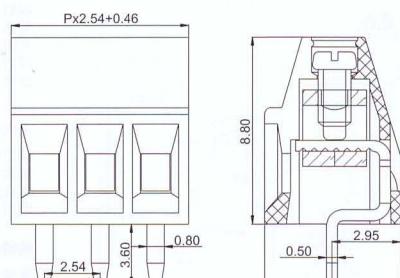

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5 lb.in )  
剥线长度: 7mm

## MECHANICAL

Temp range: -40°C~+105°C  
MAX soldering: + 250 °C for 5 sec.  
Torque: 0.4 Nm ( 3.5 lb.in )  
Strip length: 7mm

认证: CE

## KF128-2.54



## 材质及电镀

间距: 2.54mm  
极数: 2P-30P  
螺丝: M1.6、钢、镀镍  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 2.54mm  
Poles: 2P-30P  
Screws: M1.6, Steel, Ni plated  
Pin header: Brass, Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66. UL94V - 0

## 电气性能

额定电压: 150V  
额定电流: 6A  
耐电压: AC1250V/1Min  
使用线径: 24-12AWG

## ELECTRICAL

Rated voltage: 150V  
Rated current: 6A  
Withstanding voltage: AC1250V/1Min  
Wire range: 24-12AWG

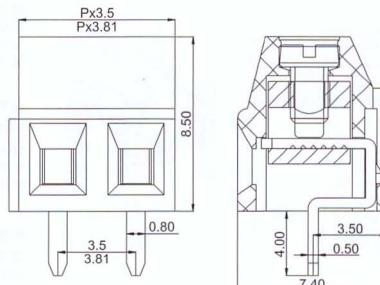
## 机械性能

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.1Nm ( 0.88lb.in )  
剥线长度: 5-6mm

## MECHANICAL

Temp range: -40°C~+105°C  
MAX soldering: + 250 °C for 5 sec.  
Torque: 0.1Nm ( 0.88lb.in )  
Strip length: 5-6mm

认证: CE

**KF128L-3.5/3.81****材质及电镀**

间距: 3.5/3.81mm  
极数: 2P、3P  
螺丝: M2、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66. UL94V-0

**MATERIAL**

Pitch: 3.5/3.81mm  
Poles: 2P, 3P  
Screw: M2, Steel, Zinc plated  
Wire cage: Brass, Ni plated  
Pin header:Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC1250V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage:AC1250V/1Min  
Wire range: 24-12AWG

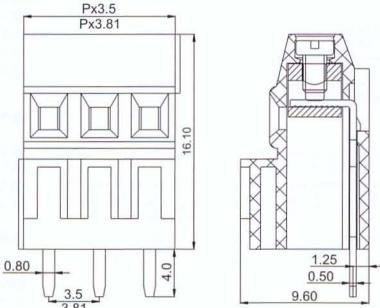
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.2Nm ( 1.8lb.in )  
剥线长度: 5-6mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.2 Nm (1.8 lb.in)  
Strip length: 5-6mm

认证:

**KF128H-3.5/3.81****材质及电镀**

间距: 3.5/3.81mm  
极数: 2P、3P  
螺丝: M2、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66. UL94V-0

**MATERIAL**

Pitch: 3.5/3.81mm  
Poles: 2P, 3P  
Screw: M2, Steel, Zinc plated  
Wire cage: Brass, Ni plated  
Pin header:Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage:AC2000V/1Min  
Wire range: 24-12AWG

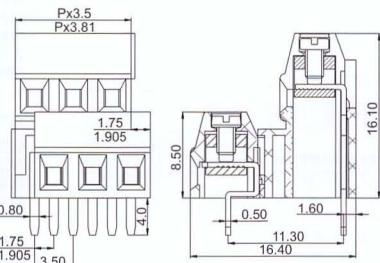

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.2Nm ( 1.8lb.in )  
剥线长度: 5-6mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.2 Nm (1.8 lb.in)  
Strip length: 5-6mm

认证:

**KF128A-3.5/3.81****材质及电镀**

间距: 3.5/3.81mm  
极数: 2P、3P  
螺丝: M2、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66. UL94V-0

**MATERIAL**

Pitch: 3.5/3.81mm  
Poles: 2P, 3P  
Screw: M2, Steel, Zinc plated  
Wire cage: Brass, Ni plated  
Pin header:Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC1250V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage:AC1250V/1Min  
Wire range: 24-12AWG

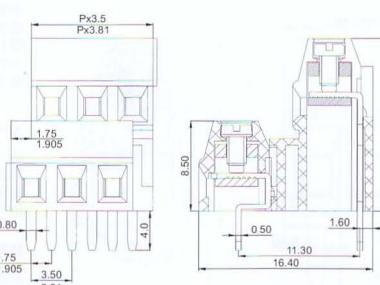
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.2Nm ( 1.8lb.in )  
剥线长度: 5-6mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.2 Nm (1.8 lb.in)  
Strip length: 5-6mm

认证:

**KF128B-3.5/3.81****材质及电镀**

间距: 3.5/3.81mm  
极数: 2P、3P  
螺丝: M2、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66. UL94V-0

**MATERIAL**

Pitch: 3.5/3.81mm  
Poles: 2P, 3P  
Screw: M2, Steel, Zinc plated  
Wire cage: Brass, Ni plated  
Pin header:Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC1250V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage:AC1250V/1Min  
Wire range: 24-12AWG

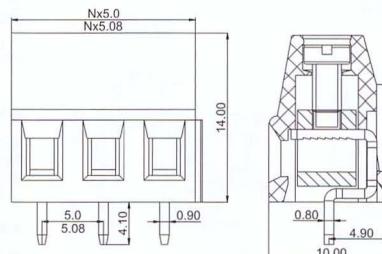
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.2Nm ( 1.8lb.in )  
剥线长度: 5-6mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.2 Nm (1.8 lb.in)  
Strip length: 5-6mm

认证:

**KF128L-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5, 钢、镀锌  
方扣: 钢、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

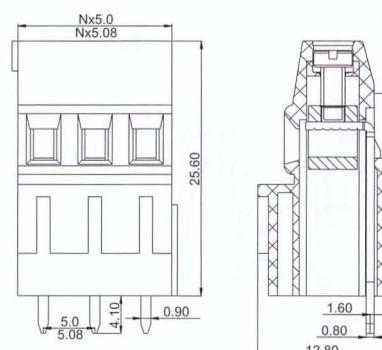

**ELECTRICAL**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**MECHANICAL**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

认证:

**KF128H-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5, 钢、镀锌  
方扣: 钢、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

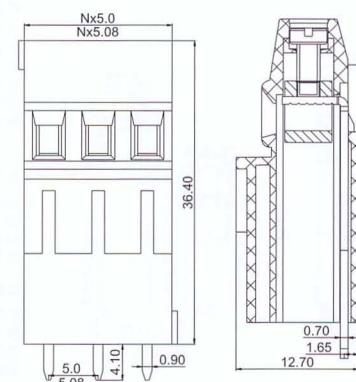

**ELECTRICAL**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**MECHANICAL**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

认证:

**KF128HH-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5, 钢、镀锌  
方扣: 钢、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

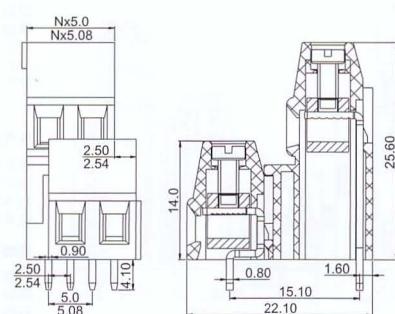

**ELECTRICAL**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**MECHANICAL**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

认证:

**KF128A-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5, 钢、镀锌  
方扣: 钢、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

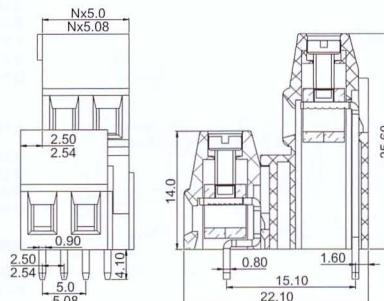

**ELECTRICAL**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**MECHANICAL**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

认证:

**KF128B-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

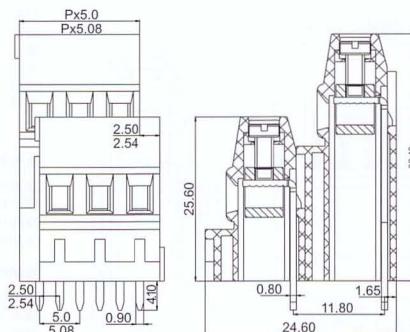
**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

**KF128AA-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

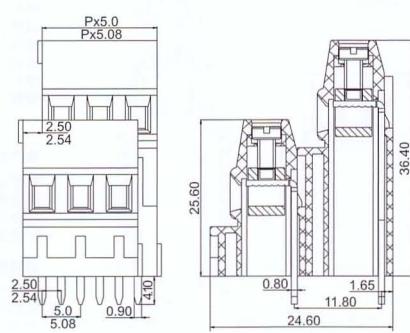
**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

**KF128BB-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12WG

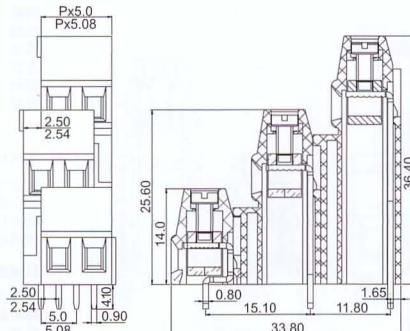

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

**KF128A3-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

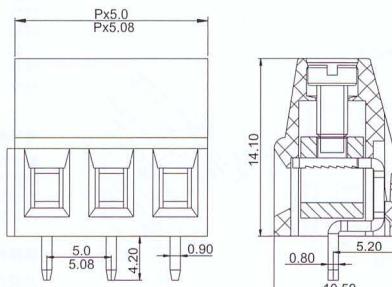

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

## KF128-5.0/5.08



## 材质及电镀

间距: 5.0/5.08 mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌或黄铜  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0/5.08 mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated or Brass  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 22-12AWG

## ELECTRICAL

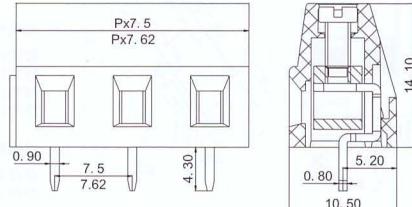

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-12AWG

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

## KF128-7.5/7.62



## 材质及电镀

间距: 7.5/7.62mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌或黄铜  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 7.5/7.62mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated or Brass  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2500V/1Min  
使用线径: 22-12AWG

## ELECTRICAL

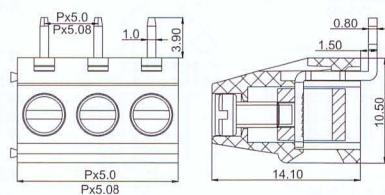
Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2500V/1Min  
Wire range: 22-12AWG

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

## KF128R-5.0/5.08



## 材质及电镀

间距: 5.0/5.08 mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 5.0/5.08 mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated or Brass  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

## ELECTRICAL

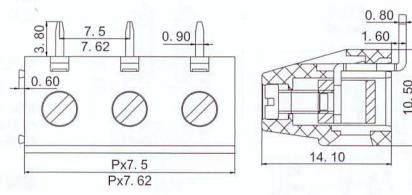

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

## KF128R-7.5/7.62



## 材质及电镀

间距: 7.5/7.62mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌或黄铜  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 7.5/7.62mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated or Brass  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 10A  
耐电压: AC2500V/1Min  
使用线径: 22-12AWG

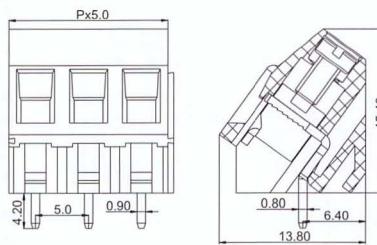

## ELECTRICAL

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2500V/1Min  
Wire range: 22-12AWG

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: cULus CE

**KF103-5.0****材质及电镀**

间距: 5.0mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌或黄铜  
方扣: 钢、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated or Brass  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-12AWG

**MECHANICAL**

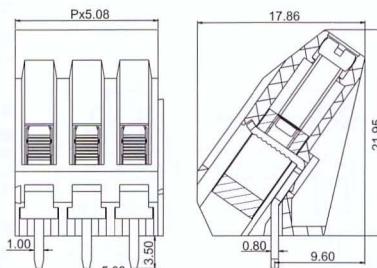

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

**电气性能**

额定电压: 300V  
额定电流: 10A  
耐电压: AC2000V/1Min  
使用线径: 22-12AWG

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.4Nm ( 3.5lb.in )  
剥线长度: 6-7mm

**KF104-5.08****材质及电镀**

间距: 5.08mm  
极数: 2P、3P  
螺丝: M2.5、钢、镀锌或黄铜  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.08mm  
Poles: 2P, 3P  
Screw: M2.5, Steel, Zinc plated or Brass  
Wire cage: Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

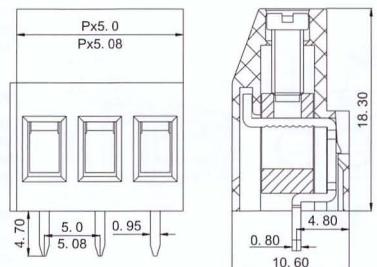

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 10A  
Withstanding voltage: AC2000V/1Min  
Wire range: 22-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.4 Nm (3.5 lb.in)  
Strip length: 6-7mm

认证: CE

**KF129-5.0/5.08****材质及电镀**

间距: 5.0/5.08 mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 钢、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08 mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

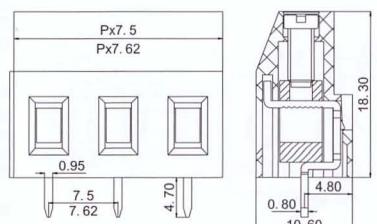

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.5 Nm (4.4 lb.in)  
Strip length: 6-7mm

认证: cULus CE

**KF129-7.5/7.62****材质及电镀**

间距: 7.5/7.62mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 钢、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 7.5/7.62mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

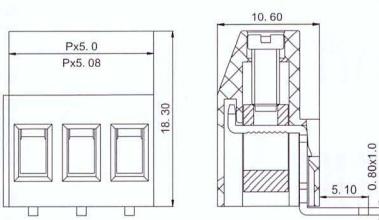
**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage: AC2500V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.5 Nm (4.4 lb.in)  
Strip length: 6-7mm

认证: cULus CE

**KF129R-5.0/5.08****材质及电镀**

间距: 5.0/5.08 mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08 mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 25A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

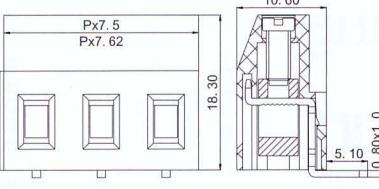

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.5 Nm (4.4 lb.in)  
Strip length: 6-7mm

认证: cULus DKE CE

**KF129R-7.5/7.62****材质及电镀**

间距: 7.5/7.62mm  
极数: 2P, 3P  
螺丝: M3、钢、镀锌  
方扣: 铜、镀锌或黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 7.5 / 7.62mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Steel Zinc plated or Brass  
Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 25A  
耐电压: AC2500V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage: AC2500V/1Min  
Wire range: 24-12AWG

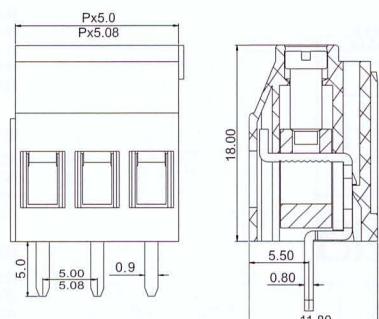

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.5 Nm (4.4 lb.in)  
Strip length: 6-7mm

认证: cULus DKE CE

**KF129L-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P, 3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 25A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

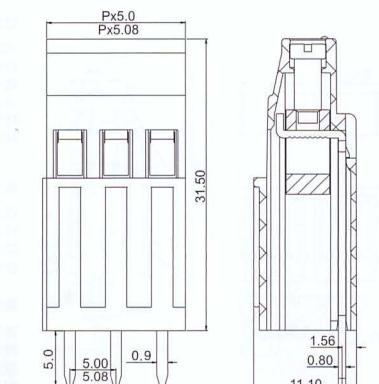

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.5 Nm (4.4 lb.in)  
Strip length: 6-7mm

认证: cULus DKE CE

**KF129H-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P, 3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 5.0/5.08mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 300V  
额定电流: 25A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage: AC2000V/1Min  
Wire range: 24-12AWG

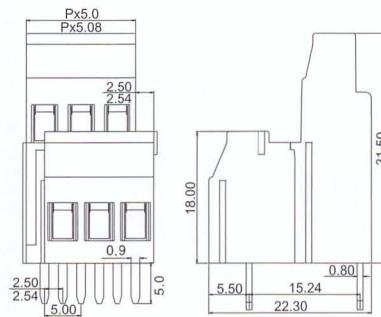

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: +250°C for 5 sec.  
Torque: 0.5 Nm (4.4 lb.in)  
Strip length: 6-7mm

认证: cULus DKE CE

**KF129A-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**电气性能**

额定电压: 300V  
额定电流: 25A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

认证: cULus CE

**MATERIAL**

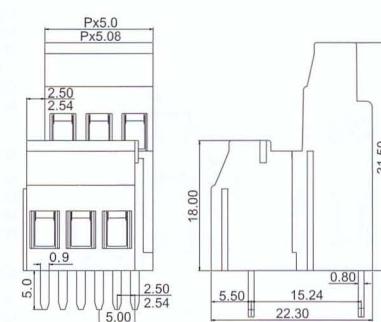

Pitch: 5.0/5.08mm  
Poles: 2P、3P  
Screw: M3、Steel、Zinc plated  
Wire cage:Brass Ni plated  
Pin header: Brass、Tin plated  
Housing: PA66. UL94V - 0

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage:AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm ( 4.4 lb.in )  
Strip length: 6-7mm

**KF129B-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**电气性能**

额定电压: 300V  
额定电流: 25A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

认证: cULus CE

**MATERIAL**

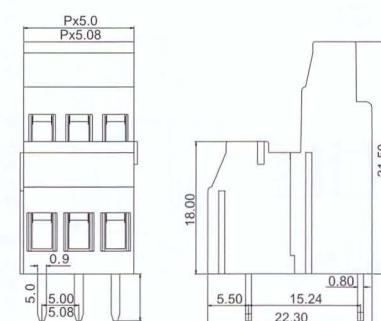

Pitch: 5.0/5.08mm  
Poles: 2P、3P  
Screw: M3、Steel、Zinc plated  
Wire cage:Brass Ni plated  
Pin header: Brass、Tin plated  
Housing: PA66. UL94V - 0

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage:AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm ( 4.4 lb.in )  
Strip length: 6-7mm

**KF129C-5.0/5.08****材质及电镀**

间距: 5.0/5.08mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**电气性能**

额定电压: 300V  
额定电流: 25A  
耐电压: AC2000V/1Min  
使用线径: 24-12AWG

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

认证: cULus CE

**MATERIAL**


Pitch: 5.0/5.08mm  
Poles: 2P、3P  
Screw: M3、Steel、Zinc plated  
Wire cage:Brass Ni plated  
Pin header: Brass、Tin plated  
Housing: PA66. UL94V - 0

**ELECTRICAL**

Rated voltage: 300V  
Rated current: 25A  
Withstanding voltage:AC2000V/1Min  
Wire range: 24-12AWG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm ( 4.4 lb.in )  
Strip length: 6-7mm

**KF635-6.35****材质及电镀**

间距: 6.35mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

**电气性能**

额定电压: 300V  
额定电流: 30A  
耐电压: AC3000V/1Min  
使用线径: 22-10A WG

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C秒  
扭矩: 0.5Nm ( 4.4lb.in )  
剥线长度: 6-7mm

认证: cULus CE

**MATERIAL**

Pitch: 6.35mm  
Poles: 2P、3P  
Screw: M3、Steel、Zinc plated  
Wire cage:Brass Ni plated  
Pin header: Brass、Tin plated  
Housing: PA66. UL94V - 0

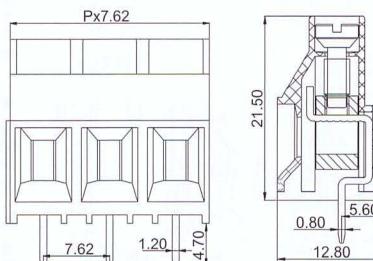
**ELECTRICAL**

Rated voltage: 300V  
Rated current: 30A  
Withstanding voltage:AC3000V/1Min  
Wire range: 22-10A WG

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm ( 4.4 lb.in )  
Strip length: 6-7mm

## KF7620-7.62



## 材质及电镀

间距: 7.62mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 7.62mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Pin header: Brass Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 30A  
耐电压: AC3000V/1Min  
使用线径: 22-10AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 30A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22-10AWG

## 机械性能

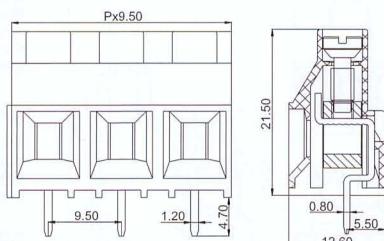
温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4 lb.in )  
剥线长度: 6-7mm

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5Nm ( 4.4 lb.in )  
Strip length: 6-7mm

认证:

## KF950-9.5



## 材质及电镀

间距: 9.5mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 9.5mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 30A  
耐电压: AC3000V/1Min  
使用线径: 22-10AWG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 30A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22-10AWG

## 机械性能

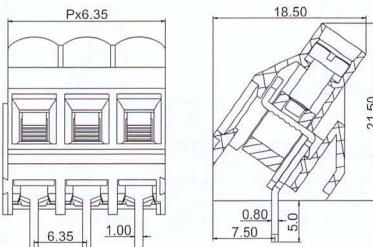

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4 lb.in )  
剥线长度: 8mm

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm ( 4.4 lb.in )  
Strip length: 8mm

认证:

## KF635S-6.35



## 材质及电镀

间距: 6.35mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 6.35mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 30A  
耐电压: AC3000V/1Min  
使用线径: 22-10A WG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 30A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22-10A WG

## 机械性能

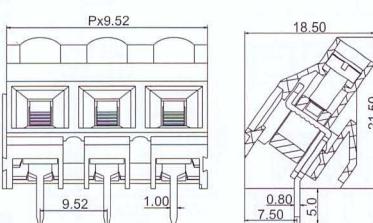

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4 lb.in )  
剥线长度: 6-7mm

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm ( 4.4 lb.in )  
Strip length: 6-7mm

认证:

## KF950S-9.52



## 材质及电镀

间距: 9.52mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
方扣: 黄铜、镀镍  
焊针: 黄铜、镀锡  
塑件: PA66.UL94V-0

## MATERIAL

Pitch: 9.52mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Wire cage: Brass Ni plated  
Pin header: Brass, Tin plated  
Housing: PA66, UL94V - 0

## 电气性能

额定电压: 300V  
额定电流: 30A  
耐电压: AC3000V/1Min  
使用线径: 22-10A WG

## ELECTRICAL

Rated voltage: 300V  
Rated current: 30A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22-10A WG

## 机械性能

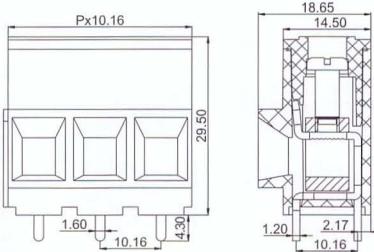

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 0.5Nm ( 4.4 lb.in )  
剥线长度: 6-7mm

## MECHANICAL

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 0.5 Nm ( 4.4 lb.in )  
Strip length: 6-7mm

认证:



**KF135T-10.16****材质及电镀**

间距: 10.16mm  
极数: 2P、3P  
螺丝: M3、钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 10.16mm  
Poles: 2P, 3P  
Screw: M3, Steel, Zinc plated  
Pin header: Brass Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 750V  
额定电流: 57A  
耐电压: AC3000V/1Min  
使用线径: 26-6AWG

**ELECTRICAL**

Rated voltage: 750V  
Rated current: 57A  
Withstanding voltage: AC3000V/1Min  
Wire range: 26-6AWG

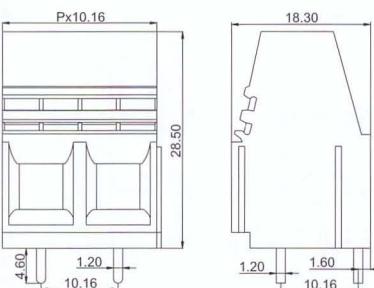
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 1.2Nm ( 10.5lb.in )  
剥线长度: 10mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 1.2 Nm (10.5 lb.in)  
Strip length: 10mm

认证:

**KFA-1016-10.16****材质及电镀**

间距: 10.16mm  
极数: 2P、3P  
螺丝: M4、钢、镀锌  
方扣: 铜、镀锌  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 10.16mm  
Poles: 2P, 3P  
Screw: M4, Steel, Zinc plated  
Wire cage: Steel, Zinc plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 600V  
额定电流: 57A  
耐电压: AC3000V/1Min  
使用线径: 22-8AWG

**ELECTRICAL**

Rated voltage: 600V  
Rated current: 57A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22-8AWG

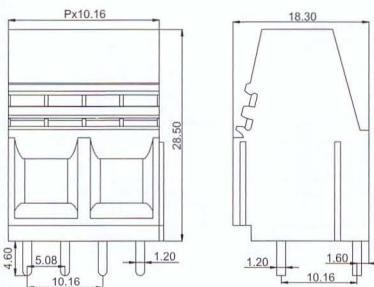
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
剥线长度: 10-12mm  
扭矩: 1.7Nm ( 15.0lb.in )

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Strip length: 10-12mm  
Torque: 1.7 Nm (15.0 lb.in)

认证:

**KFB-1016-10.16****材质及电镀**

间距: 10.16mm  
极数: 2P、3P  
螺丝: M4、钢、镀锌  
方扣: 铜、镀锌  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 10.16mm  
Poles: 2P, 3P  
Screw: M4, Steel, Zinc plated  
Wire cage: Steel, Zinc plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 600V  
额定电流: 57A  
耐电压: AC3000V/1Min  
使用线径: 22-8AWG

**ELECTRICAL**

Rated voltage: 600V  
Rated current: 57A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22-8AWG

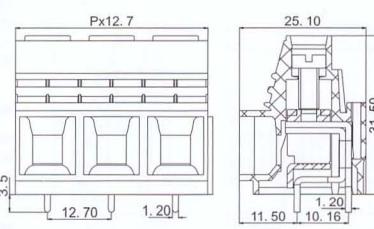
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
剥线长度: 10-12mm  
扭矩: 1.7Nm ( 15.0lb.in )

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Strip length: 10-12mm  
Torque: 1.7 Nm (15.0 lb.in)

认证:

**KFA-1270****材质及电镀**

间距: 12.7mm  
极数: 2P、3P  
螺丝: M4、钢、镀锌  
方扣: 铜、镀锌  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 12.7mm  
Poles: 2P, 3P  
Screw: M4, Steel, Zinc plated  
Wire cage: Steel, Zinc plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 600V  
额定电流: 57A  
耐电压: AC3000V/1Min  
使用线径: 22-8AWG

**ELECTRICAL**

Rated voltage: 600V  
Rated current: 57A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22-8AWG

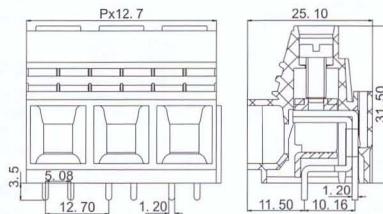
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
剥线长度: 10-12mm  
扭矩: 1.7Nm ( 15.0lb.in )

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Strip length: 10-12mm  
Torque: 1.7 Nm (15.0 lb.in)

认证:

**KFB-1270****材质及电镀**

间距: 12.7mm  
极数: 2P、3P  
螺丝: M4、钢、镀锌  
方扣: 钢、镀锌  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 12.7mm  
Poles: 2P, 3P  
Screw: M4, Steel, Zinc plated  
Wire cage: Steel, Zinc plated  
Housing: PA66, UL94V - 0

**电气性能**

额定电压: 600V  
额定电流: 57A  
耐电压: AC3000V/1Min  
使用线径: 22~8AWG

**ELECTRICAL**

Rated voltage: 600V  
Rated current: 57A  
Withstanding voltage: AC3000V/1Min  
Wire range: 22~8AWG

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
剥线长度: 10~12mm  
扭矩: 1.7Nm ( 15.0lb.in )

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Strip length: 10~12mm  
Torque: 1.7 Nm (15.0 lb.in)

认证: CE

**材质及电镀**

间距: 10.16mm  
极数: 2P、3P  
螺丝: M4、黄铜、镀镍或钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 10.16mm  
Poles: 2P, 3P  
Screw: M4, Brass, Ni plated or Steel Zinc plated  
Pin header: Brass Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66, UL94V - 0

**电气性能**

额定电压: 1000V  
额定电流: 65A  
耐电压: AC3000V/1Min  
使用线径: 2.5~16mm<sup>2</sup>

**ELECTRICAL**

Rated voltage: 1000V  
Rated current: 65A  
Withstanding voltage: AC3000V/1Min  
Wire range: 2.5~16mm<sup>2</sup>

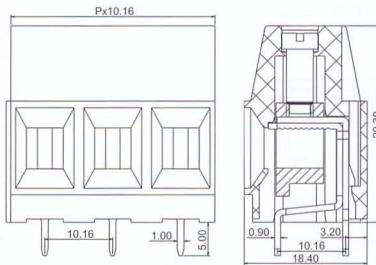

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 1.7Nm ( 15.0lb.in )  
剥线长度: 10mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 1.7 Nm (15.0 lb.in)  
Strip length: 10mm

认证: CE

**KF136T-10.16****材质及电镀**

间距: 10.16mm  
极数: 2P、3P  
螺丝: M4、黄铜、镀镍或钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 10.16mm  
Poles: 2P, 3P  
Screw: M4, Brass, Ni plated or steel Zinc plated  
Pin header: Brass Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66, UL94V - 0

**电气性能**

额定电压: 1000V  
额定电流: 65A  
耐电压: AC3000V/1Min  
使用线径: 2.5~16mm<sup>2</sup>

**ELECTRICAL**

Rated voltage: 1000V  
Rated current: 65A  
Withstanding voltage: AC3000V/1Min  
Wire range: 2.5~16mm<sup>2</sup>

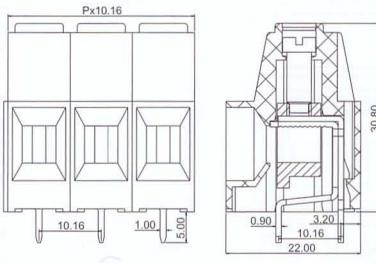
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 1.7Nm ( 15.0lb.in )  
剥线长度: 10mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 1.7 Nm (15.0 lb.in)  
Strip length: 10mm

认证: CE

**KF136HT-10.16****材质及电镀**

间距: 10.16mm  
极数: 1P~xxP  
螺丝: M4、黄铜、镀镍或钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 10.16mm  
Poles: 1P~xxP  
Screw: M4, Brass, Ni plated or steel Zinc plated  
Pin header: Brass Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66, UL94V - 0

**电气性能**

额定电压: 1000V  
额定电流: 65A  
耐电压: AC3500V/1Min  
使用线径: 2.5~16mm<sup>2</sup>

**ELECTRICAL**

Rated voltage: 1000V  
Rated current: 65A  
Withstanding voltage: AC3500V/1Min  
Wire range: 2.5~16mm<sup>2</sup>

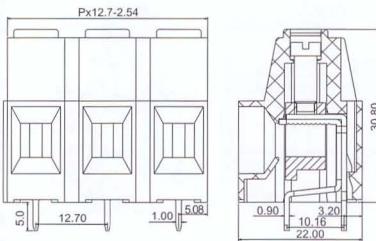
**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 1.2Nm ( 10.6lb.in )  
剥线长度: 10mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 1.2 Nm (10.6 lb.in)  
Strip length: 10mm

认证: CE

**KF136HT-12.7****材质及电镀**

间距: 12.7mm  
极数: 1P~xxP  
螺丝: M4、黄铜、镀镍或钢、镀锌  
焊针: 黄铜、镀锡  
方扣: 黄铜、镀镍  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 12.7mm  
Poles: 1P~xxP  
Screw: M4, Brass, Ni plated or steel Zinc plated  
Pin header: Brass Tin plated  
Wire cage: Brass, Ni plated  
Housing: PA66, UL94V - 0

**电气性能**

额定电压: 1000V  
额定电流: 65A  
耐电压: AC3500V/1Min  
使用线径: 2.5~16mm<sup>2</sup>

**ELECTRICAL**

Rated voltage: 1000V  
Rated current: 65A  
Withstanding voltage: AC3500V/1Min  
Wire range: 2.5~16mm<sup>2</sup>

**机械性能**

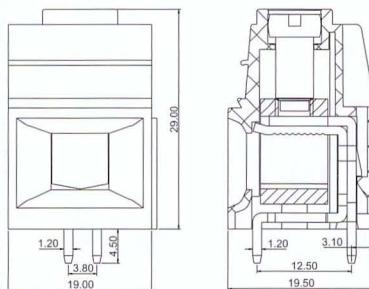
温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 1.2Nm ( 10.6lb.in )  
剥线长度: 10mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5 sec.  
Torque: 1.2 Nm (10.6 lb.in)  
Strip length: 10mm

认证: CE



**KF139-19.0****材质及电镀**

间距: 19.0mm  
极数: 1P-xxP  
螺丝: M5、钢、镀锌  
方扣: 钢、镀锌  
塑件: PA66.UL94V-0

**MATERIAL**

Pitch: 19.0mm  
Poles: 1P-xxP  
Screw: M5, steel, Zinc plated  
Wire cage: Steel, Zinc plated  
Housing: PA66. UL94V - 0

**电气性能**

额定电压: 600V  
额定电流: 100A  
耐电压: AC3500V/1Min  
使用线径: 18-3AWG

**ELECTRICAL**

Rated voltage: 600V  
Rated current: 100A  
Withstanding voltage: AC3500V/1Min  
Wire range: 18-3AWG

**机械性能**

温度范围: -40°C~+105°C  
瞬时温度: +250°C 5秒  
扭矩: 3.3Nm ( 29.2lb.in )  
剥线长度: 10-12mm

**MECHANICAL**

Temperature range: -40°C~+105°C  
MAX soldering: + 250°C for 5  
Torque: 3.3 Nm (29.2 lb.in)  
Strip length: 10-12mm

认证: cULus CE