

View from below

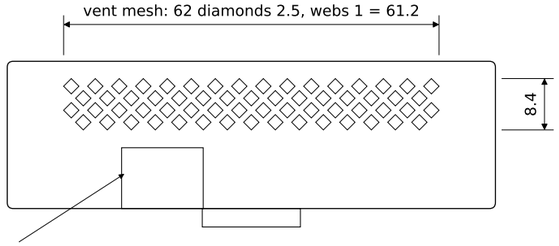


Air enters from below through the sensor chamber (SCD41)

Detail rail (2:1)




Clearance in slot: 0.4 per side


Fasteners (one screw type only)
10 heat-set inserts M2 x 3, OD 3.0 to 3.2, hole Ø2.9 x 3.4
10 button head screws M2 x 4, ISO 7380
display 4 | cover 4 | carrier 2

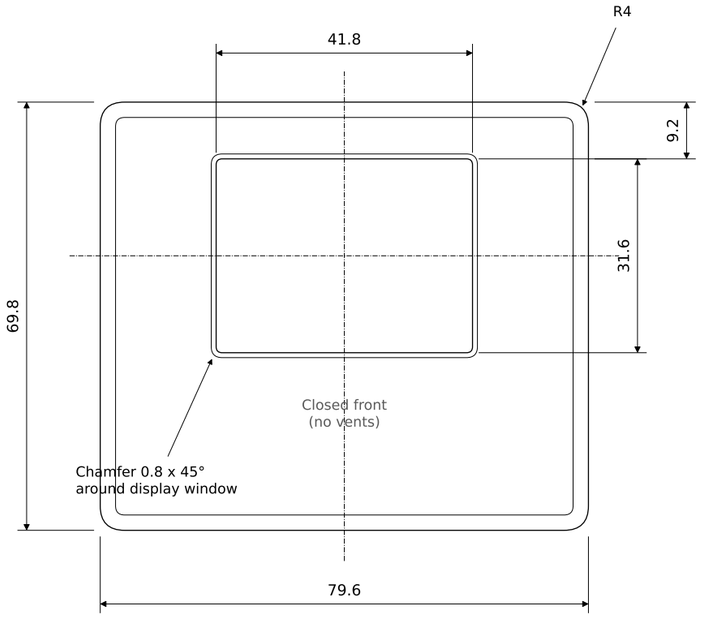

Front view

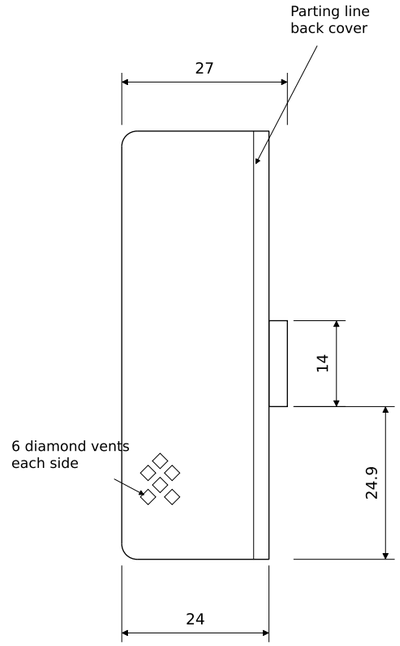


Left side view

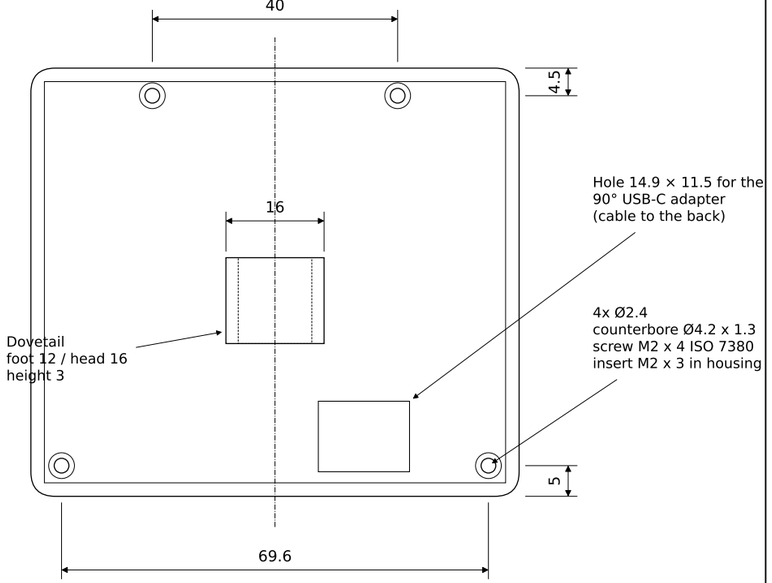


Rear view

Project	Title	Material	Scale
CO2 Wall Sensor	**Device (housing + back cover)**	**PETG (or PLA)**	**1:1**
Author	General tolerance	Date	Format
Tobias Schneider	**ISO 2768-m**	**2026-10-15**	**A3**
Units	Projection	Source	Sheet
mm	**ISO-E (first angle)**	**generate_enclosure.py**	**1 / 2**
Generated from the parametric Fusion model.	Verify placeholder dimensions (SCD41 board) before printing.		

Wall plate, front view

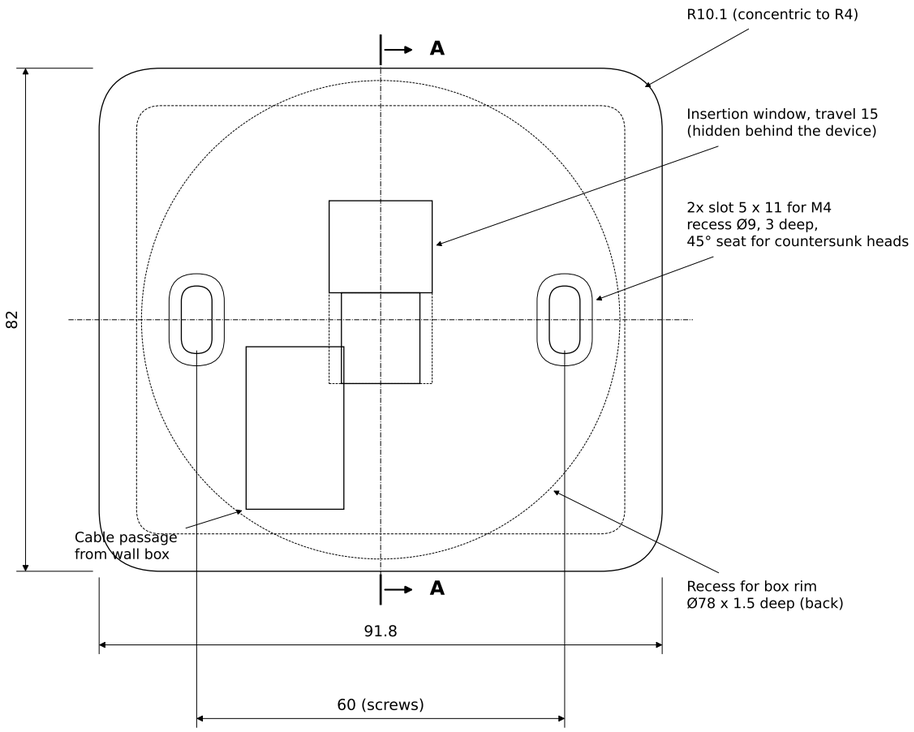


Section A-A (centre)

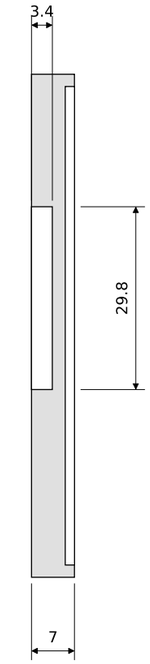

Device: insert from the front,
slide 15 mm down

Desk stand, side view in use

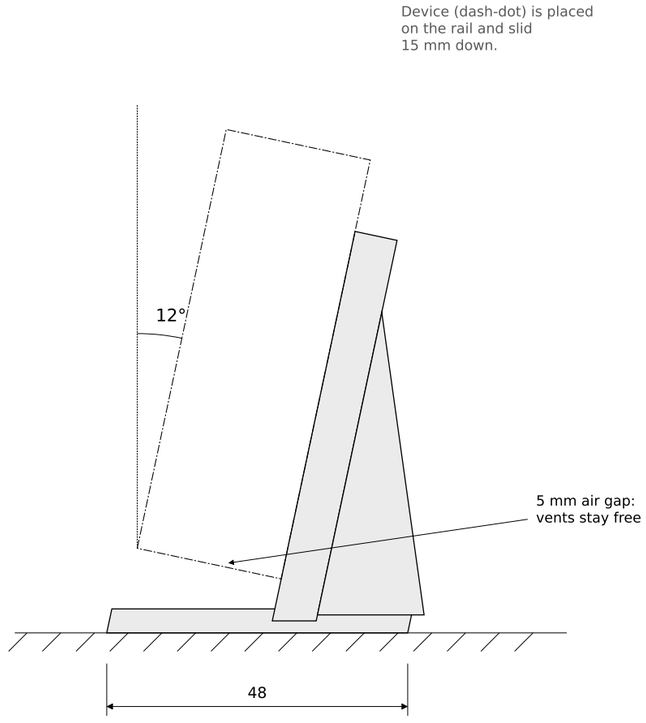

Project **CO2 Wall Sensor**	Title **Wall plate and desk stand**	Material **PETG (or PLA)**	Scale **1:1**
Author **Tobias Schneider**	General tolerance **ISO 2768-m**	Date **2026-10-15**	Format **A3**
Units **mm**	Projection **ISO-E (first angle)**	Source **generate_enclosure.py**	Sheet **2 / 2**
Generated from the parametric Fusion model.	Verify placeholder dimensions (SCD41 board) before printing.		